

FINAL REPORT

June 2009

509062901

Total Maximum Daily Load Nutrients and Organic Enrichment / Low DO For Dabbs Creek

Pearl River Basin Rankin and Simpson Counties, Mississippi

Prepared By

Mississippi Department of Environmental Quality
Office of Pollution Control
Standards, Modeling, and TMDL Branch


MDEQ

PO Box 2261

Jackson, MS 39225-2261

(601) 961-5171

www.deq.state.ms.us

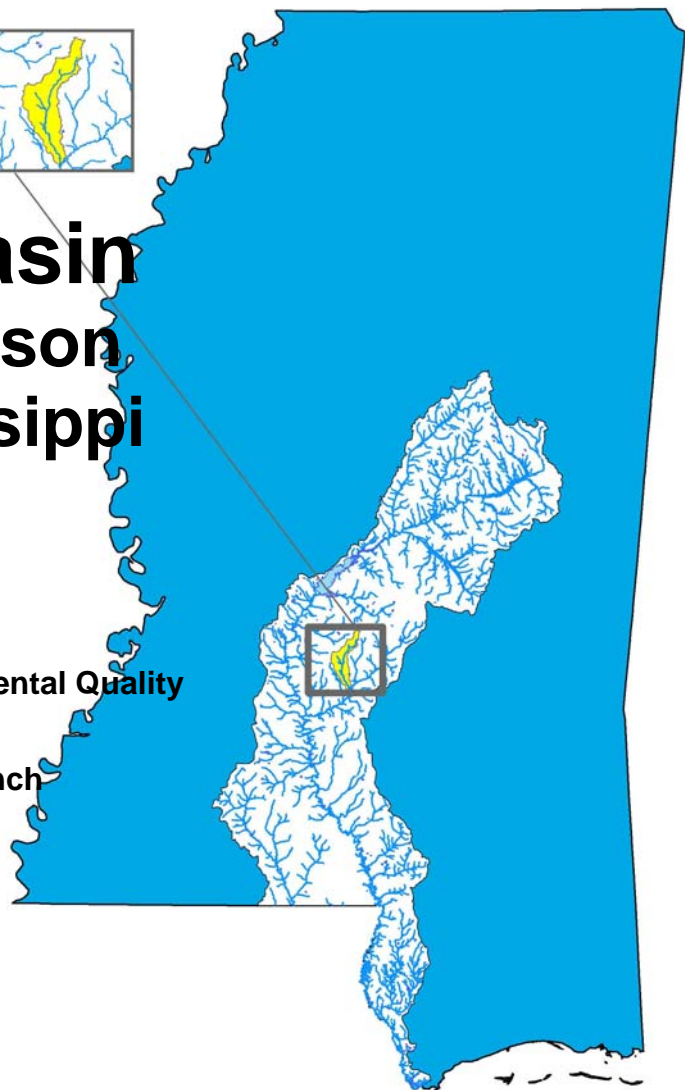

FOREWORD

This report has been prepared in accordance with the schedule contained within the federal consent decree dated December 22, 1998. The report contains one or more Total Maximum Daily Loads (TMDLs) for water body segments found on Mississippi's 1996 Section 303(d) List of Impaired Water bodies. Because of the accelerated schedule required by the consent decree, many of these TMDLs have been prepared out of sequence with the State's rotating basin approach. The implementation of the TMDLs contained herein will be prioritized within Mississippi's rotating basin approach.

The amount and quality of the data on which this report is based are limited. As additional information becomes available, the TMDLs may be updated. Such additional information may include water quality and quantity data, changes in pollutant loadings, or changes in landuse within the watershed. In some cases, additional water quality data may indicate that no impairment exists.

Conversion Factors

To convert from	To	Multiply by	To convert from	To	Multiply by
mile ²	acre	640	acre	ft ²	43560
km ²	acre	247.1	days	seconds	86400
m ³	ft ³	35.3	meters	feet	3.28
ft ³	gallons	7.48	ft ³	gallons	7.48
ft ³	liters	28.3	hectares	acres	2.47
cfs	gal/min	448.8	miles	meters	1609.3
cfs	MGD	0.646	tonnes	tons	1.1
m ³	gallons	264.2	µg/l * cfs	gm/day	2.45
m ³	liters	1000	µg/l * MGD	gm/day	3.79

Fraction	Prefix	Symbol	Multiple	Prefix	Symbol
10 ⁻¹	deci	d	10	deka	da
10 ⁻²	centi	c	10 ²	hecto	h
10 ⁻³	milli	m	10 ³	kilo	k
10 ⁻⁶	micro	µ	10 ⁶	mega	M
10 ⁻⁹	nano	n	10 ⁹	giga	G
10 ⁻¹²	pico	p	10 ¹²	tera	T
10 ⁻¹⁵	femto	f	10 ¹⁵	peta	P
10 ⁻¹⁸	atto	a	10 ¹⁸	exa	E

TABLE OF CONTENTS

TMDL INFORMATION PAGE.....	5
EXECUTIVE SUMMARY	6
INTRODUCTION	7
1.1 Background.....	7
1.2 Listing History	7
1.3 Applicable Water Body Segment Use	8
1.4 Applicable Water Body Segment Standards.....	8
1.5 Nutrient Target Development	8
WATER BODY ASSESSMENT	10
2.1 Water Quality Data	10
2.2 Assessment of Point Sources	10
2.3 Assessment of Non-Point Sources.....	10
2.4 Estimated Existing Load for Total Nitrogen and Total Phosphorus.....	12
MODELING PROCEDURE: LINKING THE SOURCES TO THE ENDPOINT.....	15
3.1 Modeling Framework Selection.....	15
3.2 Model Setup.....	16
3.3 Source Representation	18
3.4 Model Calibration	19
3.5 Model Results	20
3.5.1 Regulatory Load Scenario.....	20
3.5.2 Maximum Load Scenario.....	20
ALLOCATION.....	22
4.1 Wasteload Allocation.....	22
4.1.1 Wasteload Allocation Stormwater	22
4.2 Load Allocation	22
4.3 Incorporation of a Margin of Safety	23
4.4 Calculation of the TMDL.....	23
4.5 Seasonality and Critical Condition	23
CONCLUSION.....	24
5.1 Next Steps	24
5.2 Public Participation.....	25
REFERENCES	26

FIGURES

Figure 1. Dabbs Creek	6
Figure 2. Dabbs Creek §303(d) Listed Segment.....	7
Figure 3. Dabbs Creek Watershed Landuse.....	12
Figure 4. Pearl and South Independent Drainage Area to Flow Comparison.....	13
Figure 5. Instream Processes in a Typical DO Model	16
Figure 6. Dabbs Creek Model Setup (Note: Not to Scale)	17
Figure 7. Model Output for DO in Dabbs Creek, Regulatory Load Scenario	20
Figure 8. Model Output for DO in Dabbs Creek, Maximum Load Scenario	21

TABLES

Table 1. Listing Information	5
Table 2. Water Quality Standards.....	5
Table 3. Total Maximum Daily Load for Dabbs Creek.....	5
Table 4. Point Source Loads for Dabbs Creek.....	5
Table 5. Loads from Point Sources.....	10
Table 6. TMDL Calculations and Watershed Sizes.....	14
Table 7. Point Sources, Maximum Permitted Model Inputs.....	19
Table 8. TMDL Loads for TN, TP, and TBODu	22
Table 9. TMDL Loads for TN and TP.....	22
Table 10. Load Allocation	23
Table 11. TMDL Loads	23

TMDL INFORMATION PAGE

Table 1. Listing Information

Name	ID	County	HUC	Evaluated Cause
Dabbs Creek	MS167DE	Rankin and Simpson	03180002	Nutrients and Organic Enrichment / Low DO
Near D'Lo from Headwaters to Strong River				

Table 2. Water Quality Standards

Parameter	Beneficial use	Water Quality Criteria
Nutrients	Aquatic Life Support	Waters shall be free from materials attributable to municipal, industrial, agricultural, or other dischargers producing color, odor, taste, total suspended or dissolved solids, sediment, turbidity, or other conditions, in such degree as to create a nuisance, render the waters injurious to public health, recreation, or to aquatic life and wildlife, or adversely affect the palatability of fish, aesthetic quality, or impair the waters for any designated uses.
Dissolved Oxygen	Aquatic Life Support	DO concentrations shall be maintained at a daily average of not less than 5.0 mg/l with an instantaneous minimum of not less than 4.0 mg/l. Natural conditions are defined as background water quality conditions due only to non-anthropogenic sources. The criteria herein apply specifically with regard to substances attributed to sources (discharges, nonpoint sources, or instream activities) as opposed to natural phenomena. Waters may naturally have characteristics outside the limits established by these criteria. Therefore, naturally occurring conditions that fail to meet criteria should not be interpreted as violations of these criteria.

Table 3. Total Maximum Daily Load for Dabbs Creek

	WLA lbs/day	WLASw lbs/day	LA lbs/day	MOS	TMDL lbs/day
Total Nitrogen	15.49	8.29	279.94	Implicit	303.72
Total Phosphorous	7.01	1.18	35.2	Implicit	43.39
TBODu	33.06	NA*	1.33	Implicit	34.39

*TBODu from LA considered insignificant for calculating WLAsw.

Table 4. Point Source Loads for Dabbs Creek

Permit	Facility	Flow MGD	TN Load lbs/day	TP Load lbs/day	TBODu lbs/day
MS0024821	D' Lo POTW	0.16	15.35	6.94	32.21
MS0052744	Rock Hill Baptist Church	0.0015	0.14	0.07	0.85
	Total		15.49	7.01	33.06

EXECUTIVE SUMMARY

This TMDL has been developed for Dabbs Creek which was placed on the Mississippi 2008 Section 303(d) List of Impaired Water Bodies. Dabbs Creek was listed due to biological impairment. A stressor identification report indicated that organic enrichment / low dissolved oxygen, nutrients, and sediment were the primary probable stressors for the stream. Sediment will be addressed in a separate TMDL report. This TMDL will provide an estimate of the total biochemical oxygen demand (TBODu), total nitrogen (TN), and total phosphorus (TP) allowable in this water body.

Mississippi does not have water quality standards for allowable nutrient concentrations. MDEQ currently has a Nutrient Task Force (NTF) working on the development of criteria for nutrients. An annual concentration of 0.7 mg/l is an applicable target for TN and 0.10 mg/l for TP for water bodies located in Ecoregion 65. MDEQ is presenting these preliminary target values for TMDL development which are subject to revision after the development of numeric nutrient criteria.

The Dabbs Creek Watershed is located in HUC 03180002. The listed portion of Dabbs Creek is near D'Lo from the headwaters to the Strong River. The location of the watershed for the listed segment is shown in Figure 1.

The Dabbs Creek watershed mass balance calculations showed that the estimated existing TP concentration indicates a reduction of TP is needed from the non-point sources. Additionally, according to the STREAM model, the current TBODu load in the water body exceeds the assimilative capacity of Dabbs Creek for organic material at the critical conditions. Therefore, permit reductions are recommended in order to protect water quality. MDEQ believes that with these reductions and with the installation of best management practices, the stream will meet water quality standards.

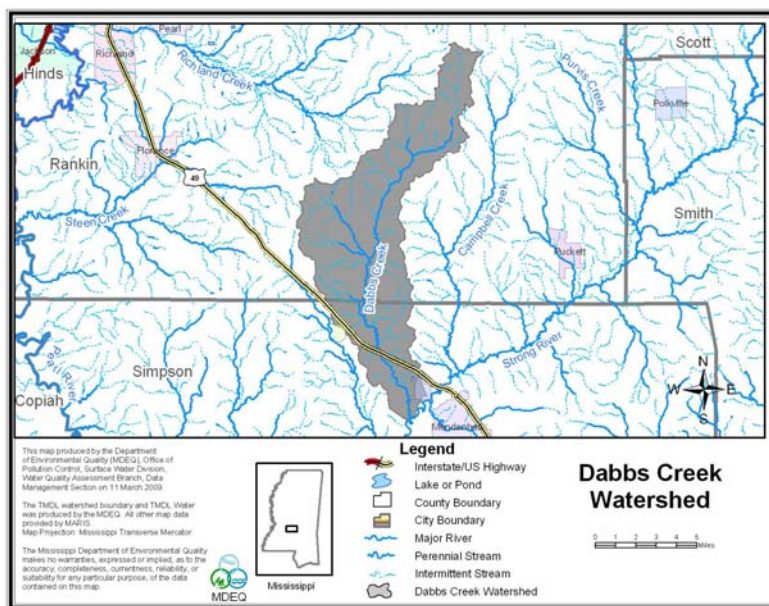


Figure 1. Dabbs Creek

INTRODUCTION

1.1 Background

The identification of water bodies not meeting their designated use and the development of total maximum daily loads (TMDLs) for those water bodies are required by Section 303(d) of the Clean Water Act and the Environmental Protection Agency's (EPA) Water Quality Planning and Management Regulations (40 CFR part 130). The TMDL process is designed to restore and maintain the quality of those impaired water bodies through the establishment of pollutant specific allowable loads. This TMDL has been developed for the 2008 §303(d) listed segment shown in Figure 2.

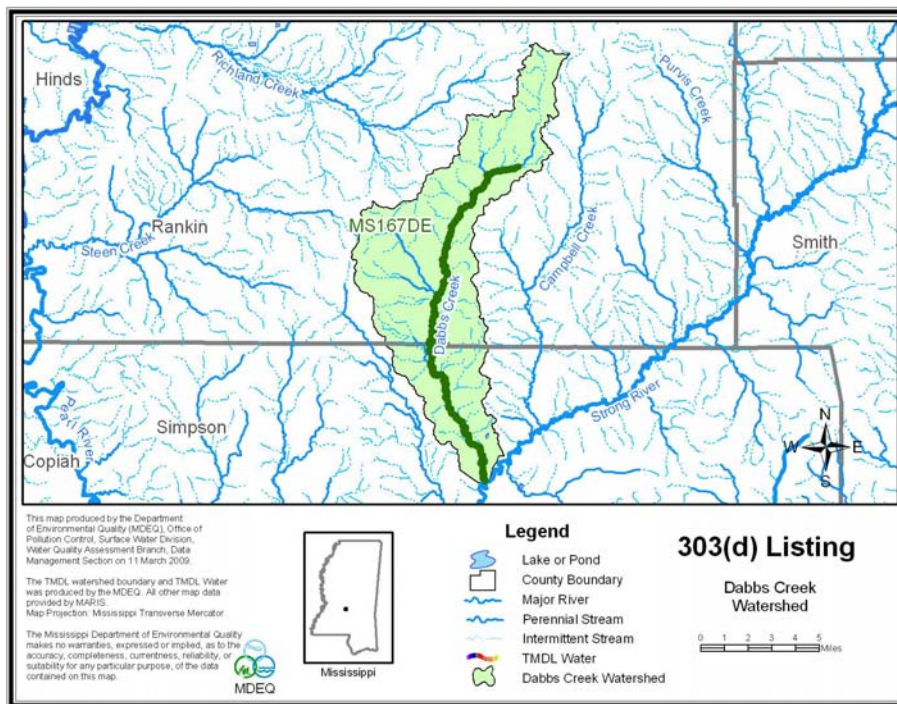


Figure 2. Dabbs Creek §303(d) Listed Segment

1.2 Listing History

In 2001, Dabbs Creek was monitored and found to be biologically impaired. A stressor identification report was completed by MDEQ in 2008 (MDEQ, 2008).

There are no state criteria in Mississippi for nutrients. These criteria are currently being developed by the Mississippi Nutrient Task Force in coordination with EPA Region 4. MDEQ proposed a work plan for nutrient criteria development that has been mutually agreed upon with EPA Region 4 and is on schedule according to the approved timeline for development of nutrient criteria (MDEQ, 2007).

1.3 Applicable Water Body Segment Use

The water use classifications are established by the State of Mississippi in the document *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters* (MDEQ, 2007). The designated beneficial use for the listed segments is Fish and Wildlife.

1.4 Applicable Water Body Segment Standards

The water quality standard applicable to the use of the water body and the pollutant of concern is defined in the *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters* (MDEQ, 2007). Mississippi's current standards contain a narrative criteria that can be applied to nutrients which states "Waters shall be free from materials attributable to municipal, industrial, agricultural, or other discharges producing color, odor, taste, total suspended or dissolved solids, sediment, turbidity, or other conditions in such degree as to create a nuisance, render the waters injurious to public health, recreation, or to aquatic life and wildlife, or adversely affect the palatability of fish, aesthetic quality, or impair the waters for any designated use (MDEQ, 2007)."

1.5 Nutrient Target Development

Nutrient data were collected quarterly at 99 discrete sampling stations state wide where biological data already existed. These stations were identified and used to represent a range of stream reaches according to biological health status, geographic location (selected to account for ecoregion, bioregion, basin and geologic variability) and streams that potentially receive non-point source pollution from urban, agricultural, and silviculture lands as well as point source pollution from NPDES permitted facilities.

Nutrient concentration data were not normally distributed; therefore, data were log transformed for statistical analyses. Data were evaluated for distinct patterns of various data groupings (stratification) according to natural variability. Only stations that were characterized as "least disturbed" through a defined process in the M-BISQ process (M-BISQ 2003) or stations that resulted in a biological impairment rating of "fully attaining" were used to evaluate natural variability of the data set. Each of these two groups was evaluated separately ("least disturbed sites" and "fully attaining sites). Some stations were used in both sets, in other words, they were considered "least disturbed" and "fully attaining". The number of stations considered "least disturbed" was 30 of 99, and the number of stations considered "fully attaining" was 53 of 99.

Several analysis techniques were used to evaluate nutrient data. Graphical analyses were used as the primary evaluation tool. Specific analyses used included; scatter plots, box plots, Pearson's correlation, and general descriptive statistics.

In general, natural nutrient variability was not apparent based on box plot analyses according to the 4 stratification scenarios. Bioregions were selected as the stratification scheme to use for TMDLs in the Pascagoula Basin. However, this was not appropriate for some water bodies in smaller bioregions. Therefore, MDEQ now uses ecoregions as a stratification scheme for the water bodies in the remainder of the state.

In order to use the data set to determine possible nutrient thresholds, nutrient concentrations were evaluated as to their correlation with biological metrics. That thorough evaluation was completed prior to the Pascagoula River Basin TMDLs. The methodology and approach were verified. The same methodology was applied to the subsequent ecoregions.

For the preliminary target concentration range for each ecoregion, the 75th and 90th percentiles were derived from the mean nutrient value at each site found to be fully supporting of aquatic life support according to the M-BISQ scores. For the estimate of the existing concentrations the 50th percentile (median) was derived from the mean nutrient value at each site of sites that were not attaining and had nutrient concentrations greater than the target. For this report, only the 90th percentile was used.

WATER BODY ASSESSMENT

2.1 Water Quality Data

The impaired segment was monitored and found to be biologically impaired. Data exist for IBI Site 379. Based upon this completed stressor identification report, the strength of evidence analysis showed organic enrichment and nutrients to be the probable primary stressors. Physical/chemical data from M-BISQ and 2008 recon indicate low DO and DO% saturation measurements. Nutrients were slightly elevated over the Least Disturbed (LD)/Site Specific Comparators (SSC) reference site. (MDEQ, 2008)

2.2 Assessment of Point Sources

There are 2 NPDES point sources in the watershed included in the TMDL. Table 5 indicates the existing estimates of loads for these outfalls at the maximum daily load scenario.

Table 5. Loads from Point Sources

NPDES	Facility	Flow (MGD)	TN Load (lbs/day)	TP Load (lbs/day)	CBODu (lbs/day)	NBODu (lbs/day)	TBODu (lbs/day)
MS0024821	D' Lo POTW	0.16	15.35	6.94	60.05	30.49	90.54
MS0052744	Rock Hill Baptist Church	0.0015	0.14	0.07	0.56	0.29	0.85
	Total		15.49	7.01	60.61	30.78	91.39

Dabbs Creek is located within a Phase II MS4 county. Therefore, MDEQ has established a method to estimate the stormwater waste load allocation (WLA_{sw}). The $WLA_{sw} = LA * \% \text{ Urban Area in MS4 in watershed } * 70\%$. The intent of the stormwater NPDES permit is not to treat the water after collection, but to reduce the exposure of stormwater runoff to pollutants by implementing various controls. Stormwater NPDES permits require the establishment of controls or BMPs to reduce the pollutants entering the environment. (GA, 2009) The TMDL loads were then calculated, using Equation 1 and the results are shown in Table 6.

$$\text{Waste Load Allocation stormwater (WLA}_{sw}) = LA * \% \text{ Urban Area in MS4 within watershed } * 70\%$$

(Equation 1)

2.3 Assessment of Non-Point Sources

Non-point loading of nutrients and organic material in a water body results from the transport of the pollutants into receiving waters by overland surface runoff, groundwater infiltration, and atmospheric deposition. The two primary nutrients of concern are nitrogen and phosphorus. Total nitrogen is a combination of many forms of nitrogen found in the environment. Inorganic nitrogen can be transported in particulate and dissolved phases in surface runoff. Dissolved inorganic nitrogen can be transported in groundwater and may enter a water body from groundwater infiltration. Finally, atmospheric gaseous nitrogen may enter a water body from atmospheric deposition.

Unlike nitrogen, phosphorus is primarily transported in surface runoff when it has been sorbed by eroding sediment. Phosphorus may also be associated with fine-grained particulate matter in the atmosphere and can enter streams as a result of dry fallout and rainfall (USEPA, 1999). However, phosphorus is typically not readily available from the atmosphere or the natural water supply (Davis and Cornwell, 1988). As a result, phosphorus is typically the limiting nutrient in most non-point source dominated rivers and streams, with the exception of watersheds which are dominated by agriculture and have high concentrations of phosphorus contained in the surface runoff due to fertilizers and animal excrement or watersheds with naturally occurring soils which are rich in phosphorus (Thomann and Mueller, 1987).

Watersheds with a large number of failing septic tanks may also deliver significant loadings of phosphorus to a water body. All domestic wastewater contains phosphorus which comes from humans and the use of phosphate containing detergents. Table 5 presents the estimated loads from various land use types in the Pearl Basin based on information from USDA ARS Sedimentation Laboratory. (Shields, et. al., 2008)

The watershed contains mainly forest but also has different landuse types, including urban, water, and wetlands. The land use information for the watershed is based on the National Land Cover Database (NLCD). The landuse distribution for the Dabbs Creek Watershed is shown in Table 5 and Figure 3. By multiplying the landuse category size by the estimated nutrient load, the watershed specific estimate can be calculated. Table 6 presents the estimated loads, the target loads, and the reductions needed to meet the TMDLs.


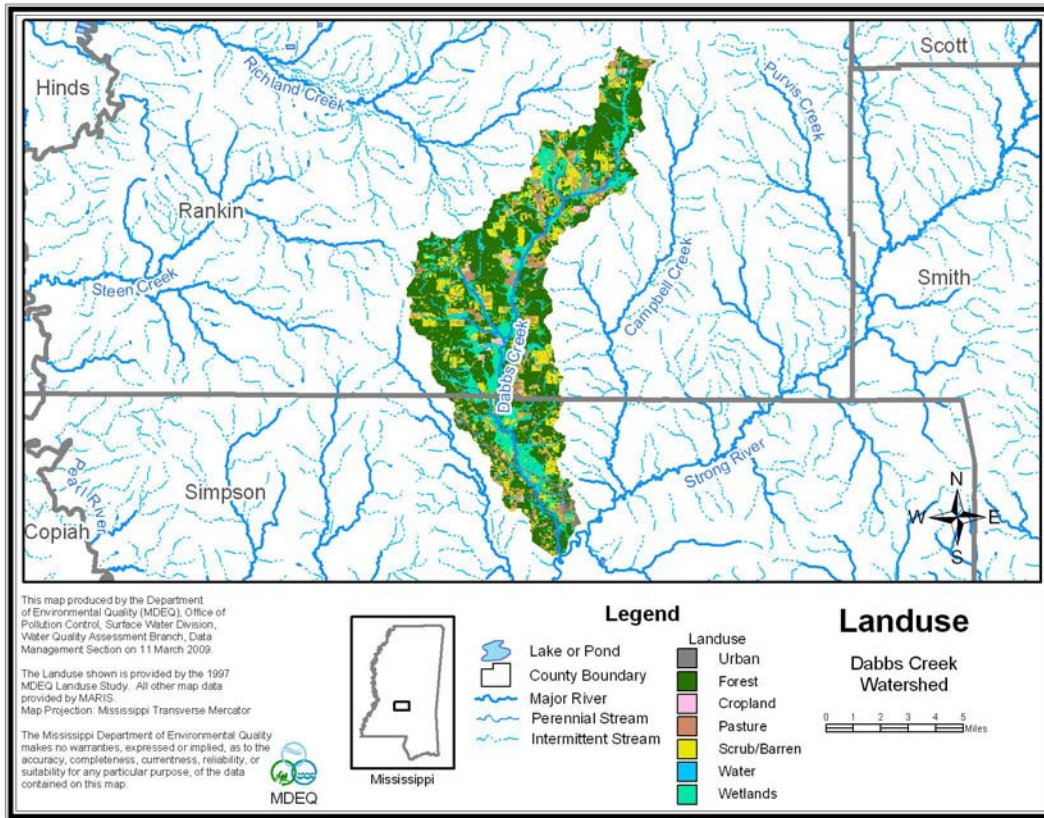


Figure 3. Dabbs Creek Watershed Landuse

2.4 Estimated Existing Load for Total Nitrogen and Total Phosphorus

The average annual flow in the watershed was calculated by utilizing the flow vs. watershed area graph shown in Figure 4 below. All available gages were compared to the watershed size. A very strong correlation between flow and watershed size was developed for the Pearl and South Independent Streams Basins. The equation for the line that best fits the data was then used to estimate the annual average flow for the Dabbs Creek watershed. The TMDL target TN and TP loads were then calculated, using Equation 2 and the results are shown in Table 6.

Figure 4. Pearl and South Independent Drainage Area to Flow Comparison

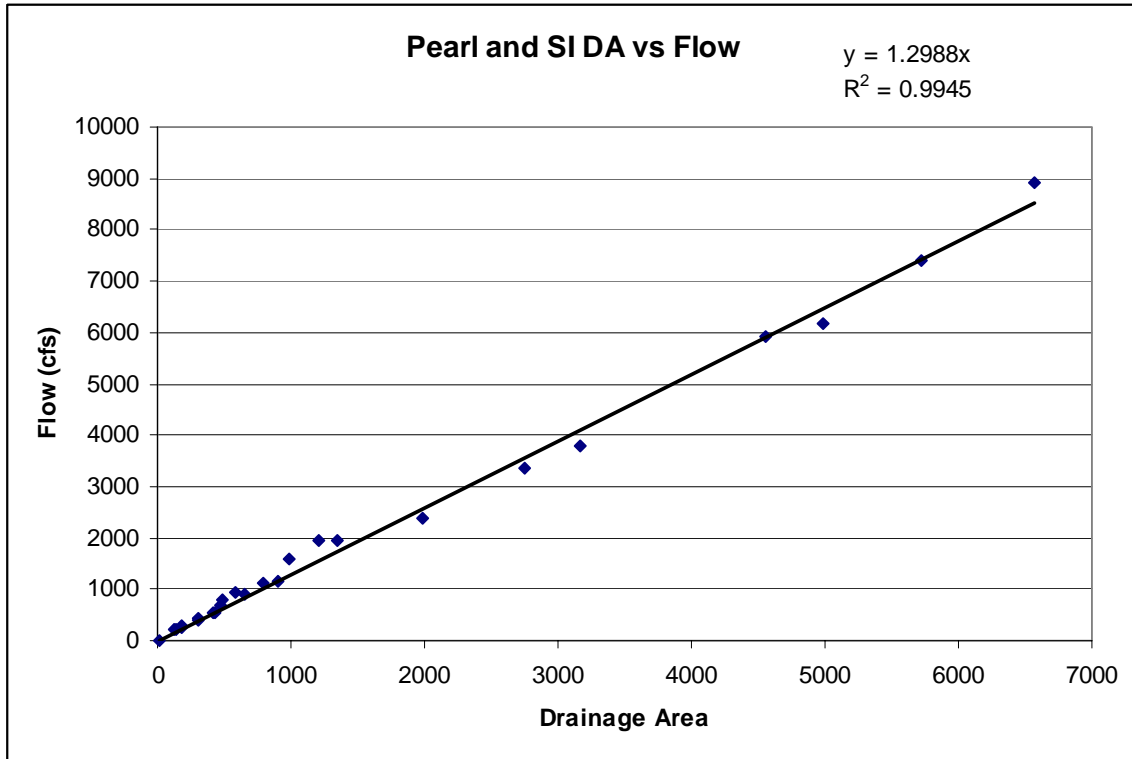

Nutrient Load (lb/day) = Flow (cfs) * 5.394 (conversion factor) * Nutrient Concentration (mg/L)
(Equation 2)

Table 6. TMDL Calculations and Watershed Sizes

Water body	Dabbs Creek		Water	Urban	Forest	Scrub/Barren	Pasture	Cropland	Wetland	Total
		Acres	168.80	1555.87	20879.32	6567.54	2673.85	656.06	7135.09	39636.5
Land Use	TN kg/mile²	Percent	0.43	3.93	52.68	16.57	6.75	1.66	18.00	100.00
Forest	111.3	Miles ² in watershed	0.26	2.43	32.62	10.26	4.18	1.03	11.15	61.93
Pasture	777.2	Flow in cfs based on area	80.44	cfs						
Cropland	5179.9									
Urban	296.4	TN Load kg/mi ² annual avg	257.40	296.40	111.32	111.32	777.20	5179.90	265.20	
Water	257.4	TP Load kg/mi ² annual avg	257.40	3.12	62.10	62.10	777.20	2589.90	265.20	
Wetland	265.2									
aquaculture	111.3	TN Load kg/day	0.19	1.97	9.95	3.13	8.90	14.55	8.10	46.78
		TP Load kg/day	0.19	0.02	5.55	1.75	8.90	7.27	8.10	31.77
Land Use	TP kg/mile²									
Forest	62.1	TN target concentration	0.70	mg/l						
Pasture	777.2	TP target concentration	0.10	mg/l						
Cropland	2589.9									
Urban	3.1	TN estimated concentration	0.24	mg/l						
Water	257.4	TP estimated concentration	0.16	mg/l						
Wetland	265.2									
aquaculture	62.1	TN target load	303.72	lbs/day				WLA _{sw} TN	.039*0.7*303.72	8.29
		TP target load	43.39	lbs/day				WLA _{sw} TP	.039*0.7*43.39	1.18
		TBODu target load	34.39	lbs/day	based on STREAM model output			WLA _{sw} TBODu	NA	NA
		TN estimated load per day	103.14	lbs/day						
		TP estimated load per day	70.05	lbs/day						
		TN reduction needed	NA							
		TP reduction needed	38.06%							
		TBODu reduction needed	66.0%							

The land use calculations are based on 2004 data. The nutrient estimates are based on USDA ARS. The TMDL targets are based on EPA guidance for calculation of targets when considering all available data.

MODELING PROCEDURE: LINKING THE SOURCES TO THE ENDPOINT

Establishing the relationship between the instream water quality target and the source loading is a critical component of TMDL development. It allows for the evaluation of management options that will achieve the desired source load reductions. The link can be established through a range of techniques, from qualitative assumptions based on sound scientific principles to sophisticated modeling techniques. Ideally, the linkage will be supported by monitoring data that allow the TMDL developer to associate certain water body responses to flow and loading conditions. In this section, the selection of the modeling tools, setup, and model application are discussed.

3.1 Modeling Framework Selection

A mathematical model, STeady Riverine Environmental Assessment Model (STREAM), for DO distribution in freshwater streams was used for developing the TMDL. STREAM is an updated version of the AFWWUL1 model, which had been used by MDEQ for many years. The use of AFWWUL1 is promulgated in the *Wastewater Regulations for National Pollutant Discharge Elimination System (NPDES) Permits, Underground Injection Control (UIC) Permits, State Permits, Water Quality Based Effluent Limitations and Water Quality Certification* (MDEQ, 1994). This model has been approved by EPA and has been used extensively at MDEQ. A key reason for using the STREAM model in TMDL development is its ability to assess instream water quality conditions in response to point and non-point source loadings.


STREAM is a steady-state, daily average computer model that utilizes a modified Streeter-Phelps DO sag equation. Instream processes simulated by the model include CBOD_u decay, nitrification, reaeration, sediment oxygen demand, and respiration and photosynthesis of algae. Figure 6 shows how these processes are related in a typical DO model. Reaction rates for the instream processes are input by the user and corrected for temperature by the model. The model output includes water quality conditions in each computational element for DO, CBOD_u, and NH₃-N concentrations. The hydrological processes simulated by the model include stream velocity and flow from point sources and spatially distributed inputs.

The model was set up to calculate reaeration within each reach using the Tsivoglou formulation. The Tsivoglou formulation calculates the reaeration rate, K_a (day^{-1} base e), within each reach according to Equation 3.

$$K_a = C*S*U \quad (\text{Eq. 3})$$

C is the escape coefficient, U is the reach velocity in mile/day, and S is the average reach slope in ft/mile. The value of the escape coefficient is assumed to be 0.11 for streams with flows less than 10 cfs and 0.0597 for stream flows equal to or greater than 10 cfs. Reach velocities were calculated using an equation based on slope. The slope of each reach was estimated with the NHD Plus GIS coverage and input into the model in units of feet/mile.


Figure 5. Instream Processes in a Typical DO Model

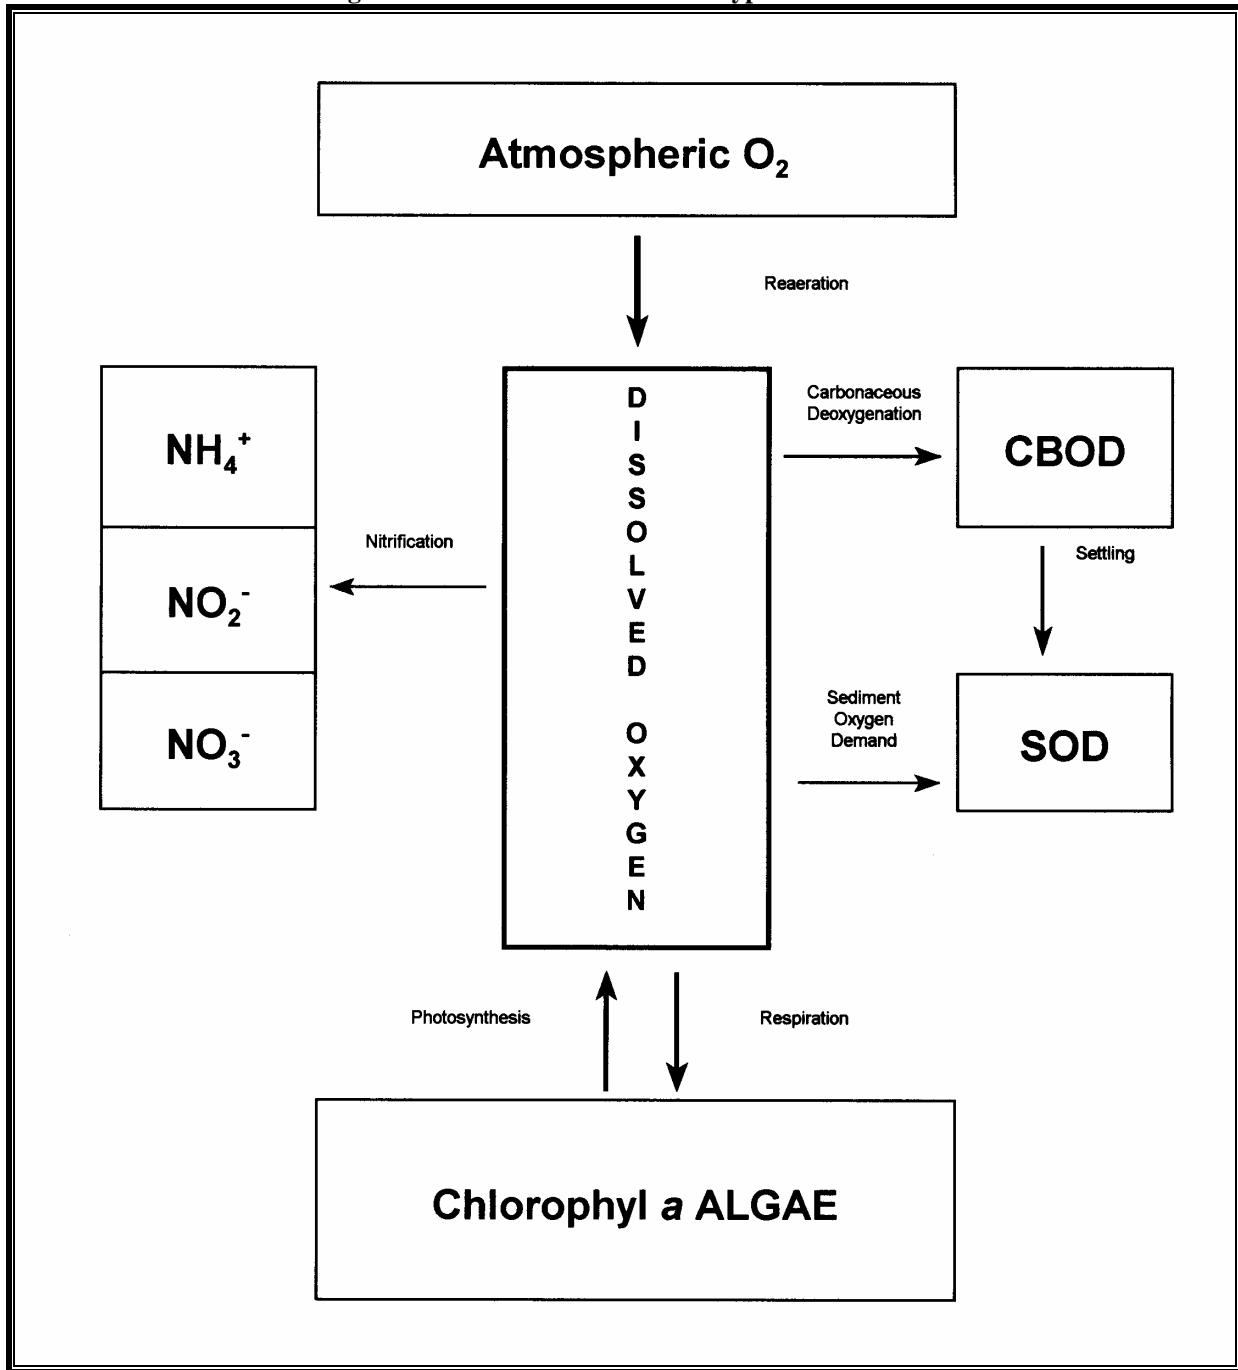

3.2 Model Setup

The model for this TMDL includes the §303(d) listed segment of Dabbs Creek, beginning at the headwaters. A diagram showing the model setup is shown in Figure 6.

Figure 6. Dabbs Creek Model Setup (Note: Not to Scale)

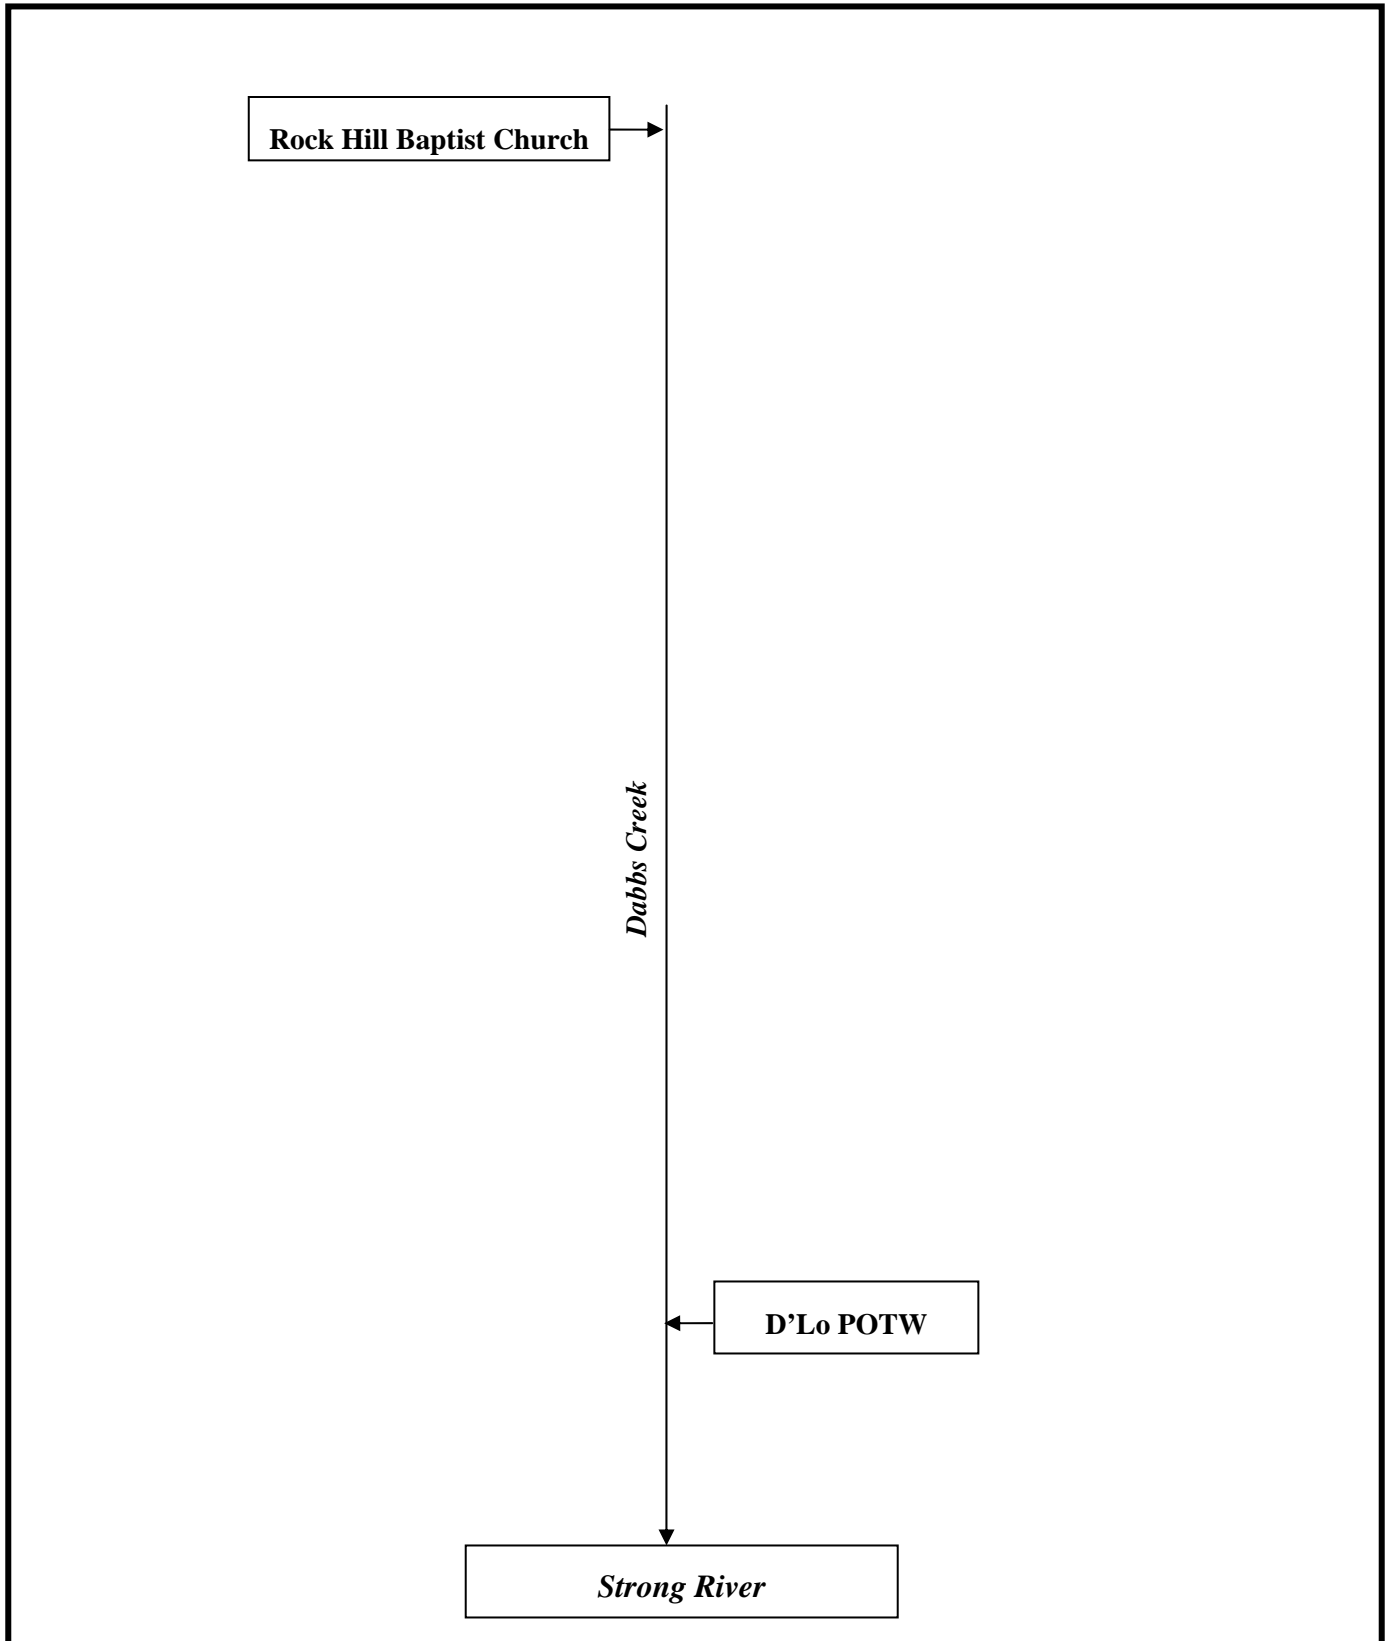

The water body was divided into reaches for modeling purposes. Reach divisions were made at locations where there is a significant change in hydrological and water quality characteristics, such as the confluence of a point source or tributary. Within each reach, the modeled segments were divided into computational elements of 0.1 mile. The simulated hydrological and water quality characteristics were calculated and output by the model for each computational element.

The STREAM model was setup to simulate flow and temperature conditions, which were determined to be the critical condition for this TMDL. MDEQ Regulations state that when the flow in a water body is less than 50 cfs, the temperature used in the model is 26°C. The headwater instream DO was assumed to be 85% of saturation at the stream temperature. The instream CBOD_u decay rate at K_d at 20°C was input as 0.3 day⁻¹ (base e) as specified in MDEQ regulations. The model adjusts the K_d rate based on temperature, according to Equation 4.

$$K_{d(T)} = K_{d(20^{\circ}\text{C})}(1.047)^{T-20} \quad (\text{Eq. 4})$$

Where K_d is the CBOD_u decay rate and T is the assumed instream temperature. The assumptions regarding the instream temperatures, background DO saturation, and CBOD_u decay rate are required by the *Empirical Stream Model Assumptions for Conventional Pollutants and Conventional Water Quality Models* (MDEQ, 1994). Also based on MDEQ Regulations, the rates for photosynthesis, respiration, and sediment oxygen demand were set to zero because data for these model parameters are not available.

Dabbs Creek currently has no USGS flow gage. The flow in Dabbs Creek watershed was modeled at critical conditions based on the 7Q10 calculated using a flow coefficient from the USGS Water-Resources Investigation Report 90-4130 Low-Flow and Flow Duration Characteristics of Mississippi Streams (Telis, 1991).

3.3 Source Representation

Both point and non-point sources were represented in the model. The loads from the NPDES permitted point source was added as a direct input into the appropriate reaches as a flow in MGD and concentration of CBOD₅ and ammonia nitrogen in mg/l. Spatially distributed loads, which represent non-point sources of flow, CBOD₅, and ammonia-nitrogen were distributed evenly into each computational element of the modeled water body.

Organic material discharged to a stream from an NPDES permitted point source is typically quantified as 5-day biochemical oxygen demand (BOD₅). BOD₅ is a measure of the oxidation of carbonaceous and nitrogenous material over a 5-day incubation period. However, oxidation of nitrogenous material, called nitrification, usually does not take place within the 5-day period because the bacteria that are responsible for nitrification are normally not present in large numbers and have slow reproduction rates (Metcalf and Eddy, 1991). Thus, BOD₅ is generally considered equal to CBOD₅. Because permits for point source facilities are written in terms of CBOD₅ while TMDLs are typically developed using CBOD_u, a ratio between the two terms is needed, Equation 5.

$$\text{CBOD}_u = \text{CBOD}_5 * \text{Ratio} \quad (\text{Eq. 5})$$

The CBODu to CBOD₅ ratios are given in *Empirical Stream Model Assumptions for Conventional Pollutants and Conventional Water Quality Models* (MDEQ, 1994). These values are recommended for use by MDEQ regulations when actual field data are not available. The value of the ratio depends on the wastewater treatment type.

In order to convert the ammonia nitrogen (NH₃-N) loads to an oxygen demand, a factor of 4.57 pounds of oxygen per pound of ammonia nitrogen (NH₃-N) oxidized to nitrate nitrogen (NO₃-N) was used. Using this factor is a conservative modeling assumption because it assumes that all of the ammonia is converted to nitrate through nitrification. The oxygen demand caused by nitrification of ammonia is equal to the NBODu load. The sum of CBODu and NBODu is equal to the point source load of TBODu. The permitted load of TBODu from the existing point source to be used in the STREAM model is given in Table 7.

Table 7. Point Sources, Maximum Permitted Model Inputs

NPDES	Facility	Flow (MGD)	CBODu (lbs/day)	NBODu (lbs/day)	TBODu (lbs/day)
MS0024821	D' Lo POTW	0.16	60.05	30.49	90.54
MS0052744	Rock Hill Baptist Church	0.0015	0.56	0.29	0.85
	Total		60.61	30.78	91.39

Direct measurements of background concentrations of CBODu were not available for Dabbs Creek. Because there were no data available, the background concentrations of CBODu and NH₃-N were estimated based on *Empirical Stream Model Assumptions for Conventional Pollutants and Conventional Water Quality Models* (MDEQ, 1994). According to these regulations, the background concentration used in modeling for BOD₅ is 1.33 mg/l and for NH₃-N is 0.1 mg/l. These concentrations were also used as estimates for the CBODu and NH₃-N levels of water entering the water bodies through non-point source flow and tributaries.

Non-point source flows were included in the model to account for water entering due to groundwater infiltration, overland flow, and small, unmeasured tributaries. These flows were estimated based on USGS data for the 7Q10 flow condition in the Dabbs Creek watershed. The non-point source loads were assumed to be distributed evenly on a river mile basis throughout the modeled reaches.

3.4 Model Calibration

The model used to develop the Dabbs Creek TMDL was not calibrated due to the limited amount of instream monitoring data collected during critical conditions. Future monitoring is essential to improve the accuracy of the model and the results.

3.5 Model Results

Once the model setup was complete, the model was used to predict water quality conditions in Dabbs Creek. The model was first run under regulatory load conditions. Under regulatory load conditions, the loads from the NPDES permitted point sources were based on their current location and loads shown in Table 7.

3.5.1 Regulatory Load Scenario

As shown in the figure, the model predicts that the DO does go below the standard of 5.0 mg/l using the permit based allowable loads, thus reductions are needed to meet the current TMDL. The regulatory load scenario model results are shown in Figure 7.

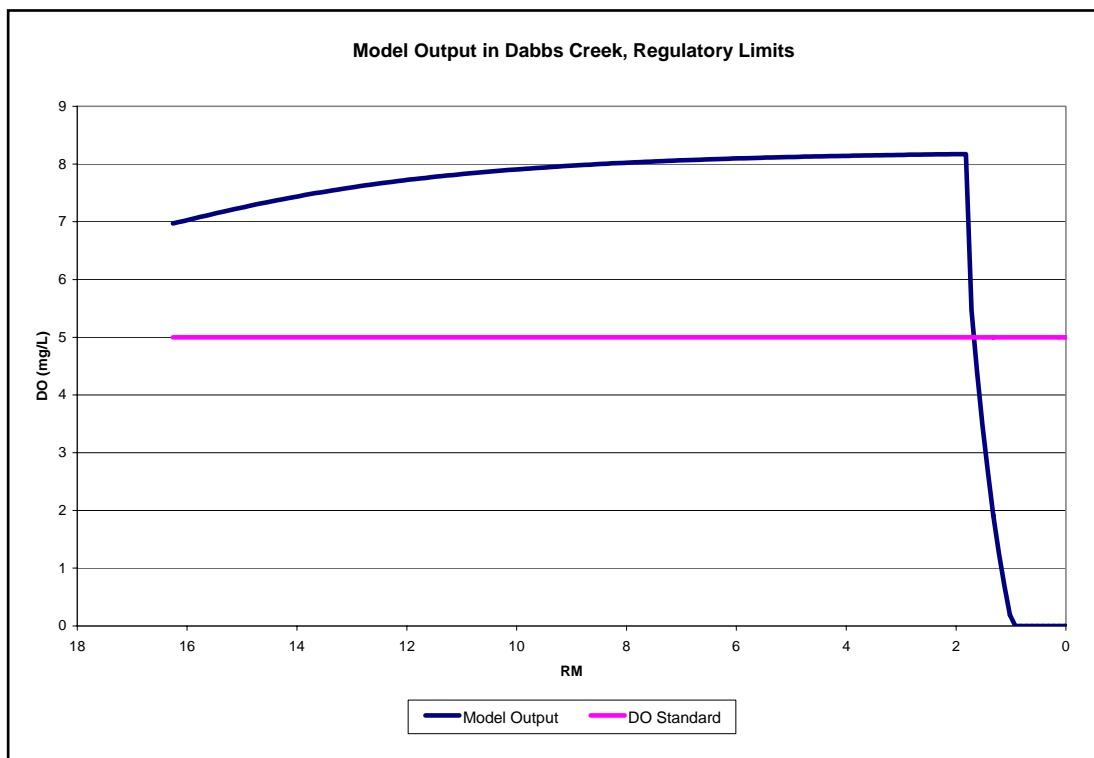


Figure 7. Model Output for DO in Dabbs Creek, Regulatory Load Scenario

3.5.2 Maximum Load Scenario

The graph of the regulatory model output shows that the predicted DO does fall below the DO standard in Dabbs Creek during critical conditions. Thus, reductions of the loads of TBODu are necessary. Calculating the maximum allowable load of TBODu involved decreasing the model loads until the modeled DO was above 5.0 mg/l. The non-point source loads in this model were already set at background conditions based on MDEQ regulations so no non-point source reductions were necessary. Thus, the permitted limits were decreased until the modeled DO was 5.0 mg/L. The decreased loads were then used to develop the allowable maximum daily load for this report. The maximum load scenario model results are shown in Figure 8.

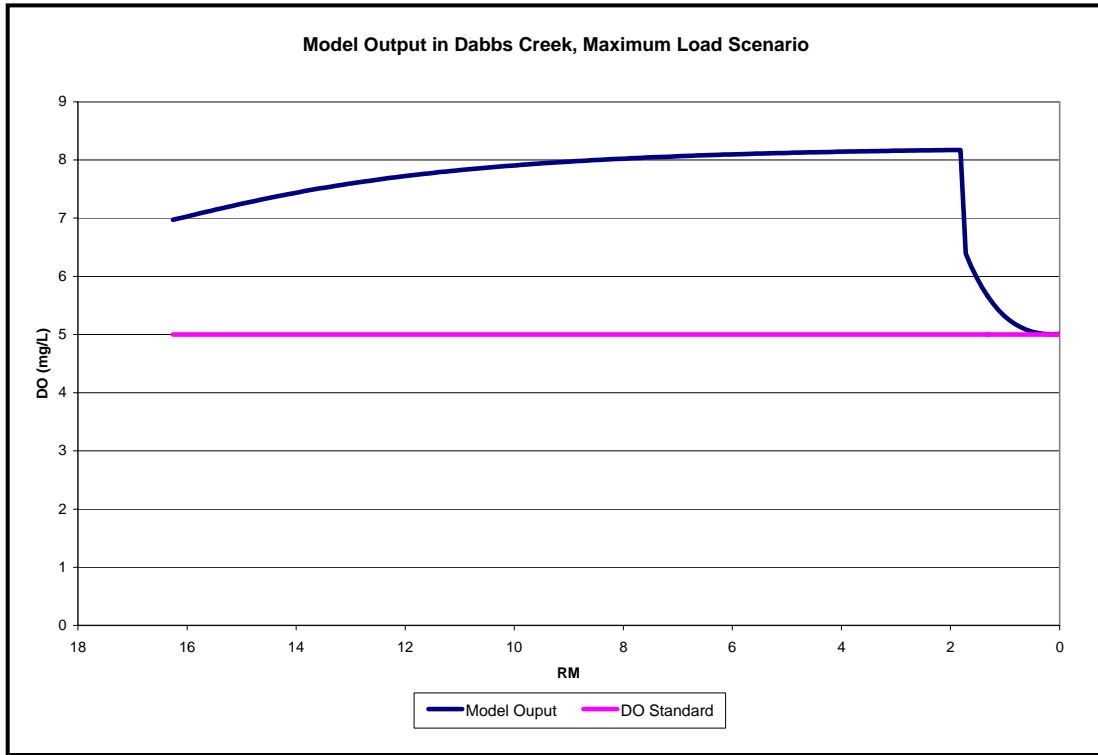


Figure 8. Model Output for DO in Dabbs Creek, Maximum Load Scenario

ALLOCATION

4.1 Wasteload Allocation

The TMDL indicates that reductions are needed from one of the point sources. The wasteload allocations for this TMDL are given in Tables 8 and 9. Table 8 shows a TBOD_u reduction of 66.6% is needed from the D'Lo POTW to help Dabbs Creek meet water quality standards. Final effluent limits of 10-2-6 (CBOD₅- NH₃-N-DO, respectively) are representative of the reduction that is required. It is noted that D'Lo POTW is currently operating under a phased permit which subsequently requires it to meet the 10-2-6 limits by 2010.

Table 8. TMDL Loads for TN, TP, and TBOD_u

Permit	Facility	Flow MGD	CBOD ₅ mg/L	CBOD _u lbs/day	NH ₃ -N mg/L	NBOD _u lbs/day	TBOD _u lbs/day	% Reduction
MS0024821	D' Lo POTW	0.16	10	20.01	2	12.20	32.21	66.6
MS0052744	Rock Hill Baptist Church	0.0015	30	0.56	5	0.29	0.85	0
	Total			20.57		12.49	33.06	64.0

Table 9. TMDL Loads for TN and TP

Permit	Facility	Flow MGD	TN Load lbs/day	TP Load lbs/day
MS0024821	D' Lo POTW	0.16	15.35	6.94
MS0052744	Rock Hill Baptist Church	0.0015	0.14	0.07
	Total		15.49	7.01

4.1.1 Wasteload Allocation Stormwater

There is a phase II MS4 in this TMDL watershed. MDEQ has established a method to estimate the stormwater waste load allocation (WLA_{sw}). The $WLA_{sw} = LA * \% \text{ Urban Area in MS4 in watershed } * 70\%$. The intent of the stormwater NPDES permit is not to treat the water after collection, but to reduce the exposure of stormwater runoff to pollutants by implementing various controls. Stormwater NPDES permits require the establishment of controls or BMPs to reduce the pollutants entering the environment. (GA, 2009)

4.2 Load Allocation

Best management practices (BMPs) should be encouraged in the watersheds to reduce potential TBOD_u, TN, and TP loads from non-point sources. The LA for TN and TP was calculated by subtracting the WLA from the TMDL. The LA for TBOD_u is shown in Table 10.

For land disturbing activities related to silviculture, construction, and agriculture, it is recommended that practices, as outlined in "Mississippi's BMPs: Best Management Practices for

Forestry in Mississippi” (MFC, 2000), “Planning and Design Manual for the Control of Erosion, Sediment, and Stormwater” (MDEQ, et. al, 1994), and “Field Office Technical Guide” (NRCS, 2000), be followed, respectively.

Table 10. Load Allocation

	Flow (cfs)	CBOD _u (mg/L)	CBOD _u (lbs/day)	NH ₃ -N (mg/L)	NBOD _u (lbs/day)	TBOD _u (lbs/day)
Non-point source	0.1	2	1.08	0.1	0.25	1.33

4.3 Incorporation of a Margin of Safety

The margin of safety is a required component of a TMDL and accounts for the uncertainty about the relationship between pollutant loads and the quality of the receiving water body. The two types of MOS development are to implicitly incorporate the MOS using conservative model assumptions or to explicitly specify a portion of the total TMDL as the MOS. The MOS selected for this model is implicit.

4.4 Calculation of the TMDL

Equation 1 was used to calculate the TMDL for TP and TN (see Table 6). The target concentration was used with the average flow for the watershed to determine the nutrient TMDLs. The STREAM model was used to calculate the TBOD_u TMDL. The allocations for TN, TP, and TBOD_u are given in Table 11. These allocations are established to attain the applicable water quality standards. The LA was further reduced by calculating the WLAsw. The sum of the WLA, WLAsw, LA, and MOS equal the TMDL.

Table 11. TMDL Loads

	WLA lbs/day	WLAsw lbs/day	LA lbs/day	MOS	TMDL lbs/day
Total Nitrogen	15.49	8.29	279.94	Implicit	303.72
Total Phosphorous	7.01	1.18	35.2	Implicit	43.39
TBOD _u	33.06	NA*	1.33	Implicit	34.39

The nutrient TMDL loads were then compared to the estimated existing loads previously calculated. A 38% reduction in TP loading is recommended. Best management practices are encouraged in this watershed to reduce the nonpoint nutrient loads.

4.5 Seasonality and Critical Condition

This TMDL accounts for seasonal variability by requiring allocations that ensure year-round protection of water quality standards, including during critical conditions.

CONCLUSION

The model results indicate that Dabbs Creek is not meeting water quality standards for dissolved oxygen at the present loading of TBODu. The current model used for these calculations does not have adequate data to support all of the assumptions used, however, it is clear that the stream is impaired based upon the stressor identification report. A reduction from one of the facilities will be necessary to help meet water quality standards. Nutrients were addressed through an estimate of a preliminary TP concentration target and a preliminary TN concentration target.

For the TMDL for TN, no reduction is needed to meet the TN target. For the TMDL for TP, an overall 38% reduction is needed to meet the TP target. The implementation of BMP activities should reduce the nutrient loads entering the creek. Best management practices are encouraged in this watershed to reduce the nonpoint nutrient loads. This TMDL recommends a 66.6% TBODu reduction from the D'Lo POTW to eliminate the DO standards violation in the stream. It is noted that D'Lo POTW is currently operating under a phased permit which requires it to meet 10-2-6 limits by 2010. This will provide improved water quality for the support of aquatic life in the water body and will result in the attainment of the applicable water quality standards.

5.1 Next Steps

MDEQ's Basin Management Approach and Nonpoint Source Program emphasize restoration of impaired waters with developed TMDLs. During the watershed prioritization process to be conducted by the Pearl River Basin Team, this TMDL will be considered as a basis for implementing possible restoration projects. The basin team is made up of state and federal resource agencies and stakeholder organizations and provides the opportunity for these entities to work with local stakeholders to achieve quantifiable improvements in water quality. Together, basin team members work to understand water quality conditions, determine causes and sources of problems, prioritize watersheds for potential water quality restoration and protection activities, and identify collaboration and leveraging opportunities. The Basin Management Approach and the Nonpoint Source Program work together to facilitate and support these activities.

The Nonpoint Source Program provides financial incentives to eligible parties to implement appropriate restoration and protection projects through the Clean Water Act's Section 319 Nonpoint Source (NPS) Grant Program. This program makes available around \$1.6M each grant year for restoration and protections efforts by providing a 60% cost share for eligible projects.

Mississippi Soil and Water Conservation Commission (MSWCC) is the lead agency responsible for abatement of agricultural NPS pollution through training, promotion, and installation of BMPs on agricultural lands. USDA Natural Resource Conservation Service (NRCS) provides technical assistance to MSWCC through its conservation districts located in each county. NRCS assists animal producers in developing nutrient management plans and grazing management plans. MDEQ, MSWCC, NRCS, and other governmental and nongovernmental organizations work closely together to reduce agricultural runoff through the Section 319 NPS Program.

Mississippi Forestry Commission (MFC), in cooperation with the Mississippi Forestry Association (MFA) and Mississippi State University (MSU), have taken a leadership role in the development and promotion of the forestry industry Best Management Practices (BMPs) in

Mississippi. MDEQ is designated as the lead agency for implementing an urban polluted runoff control program through its Stormwater Program. Through this program, MDEQ regulates most construction activities. Mississippi Department of Transportation (MDOT) is responsible for implementation of erosion and sediment control practices on highway construction.

Due to this TMDL, projects within this watershed will receive a higher score and ranking for funding through the basin team process and Nonpoint Source Program described above.

5.2 Public Participation

This TMDL will be published for a 30-day public notice. During this time, the public will be notified by publication in the statewide newspaper. The public will be given an opportunity to review the TMDLs and submit comments. MDEQ also distributes all TMDLs at the beginning of the public notice to those members of the public who have requested to be included on a TMDL mailing list. Anyone wishing to become a member of the TMDL mailing list should contact Kay Whittington at Kay_Whittington@deq.state.ms.us.

All comments should be directed to Kay_Whittington@deq.state.ms.us or Kay Whittington, MDEQ, PO Box 2261, Jackson, MS 39225. All comments received during the public notice period and at any public hearings become a part of the record of this TMDL and will be considered in the submission of this TMDL to EPA Region 4 for final approval.

REFERENCES

- Davis and Cornwell. 1988. *Introduction to Environmental Engineering*. McGraw-Hill.
- MDEQ. 2007. *Mississippi's Plan for Nutrient Criteria Development*. Office of Pollution Control.
- MDEQ. 2007. *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters*. Office of Pollution Control.
- MDEQ. 1994. *Wastewater Regulations for National Pollutant Discharge Elimination System (NPDES) Permits, Underground Injection Control (UIC) Permits, State Permits, Water Quality Based Effluent Limitations and Water Quality Certification*. Office of Pollution Control.
- MDEQ. 2008. *Stressor Identification Report for Dabbs Creek*. Office of Pollution Control.
- Metcalf and Eddy, Inc. 1991. *Wastewater Engineering: Treatment, Disposal, and Reuse 3rd ed.* New York: McGraw-Hill.
- MFC. 2000. *Mississippi's BMPs: Best Management Practices for Forestry in Mississippi*. Publication # 107.
- NRCS. 2000. *Field Office Technical Guide Transmittal No. 61*.
- Shields, F.D. Jr., Cooper, C.M., Testa, S. III, Ursic, M.E., 2008. *Nutrient Transport in the Pearl River Basin, Mississippi*. USDA ARS National Sedimentation Laboratory, Oxford, Mississippi.
- Telis, Pamela A. 1992. *Techniques for Estimating 7-Day, 10-Year Low Flow Characteristics for Ungaged Sites on Water bodies in Mississippi*. U.S. Geological Survey, Water Resources Investigations Report 91-4130.
- Thomann and Mueller. 1987. *Principles of Surface Water Quality Modeling and Control*. New York: Harper Collins.
- USEPA. 1997. *Technical Guidance Manual for Developing Total Maximum Daily Loads, Book 2: Streams and Rivers, Part 1: Biochemical Oxygen Demand/Dissolved Oxygen and Nutrients/Eutrophication*. United States Environmental Protection Agency, Office of Water, Washington, D.C. EPA 823-B-97-002.
- USEPA. 1999. *Protocol for Developing Nutrient TMDLs*. EPA 841-B-99-007. Office of Water (4503F), United States Environmental Protection Agency, Washington D.C. 135 pp.
- USEPA. 2000. *Nutrient Criteria Technical Guidance Manual Rivers and Streams*. United States Environmental Protection Agency, Office of Water, Washington, D.C. EPA-822-B-00-002.