

Total Maximum Daily Load Biological Impairment Due to Nutrients and Organic Enrichment / Low Dissolved Oxygen For Stinson Creek

Tombigbee River Basin Lowndes County, Mississippi



Prepared By

Mississippi Department of Environmental Quality
Office of Pollution Control
TMDL/WLA Branch

MDEQ
PO Box 10385
Jackson, MS 39289-0385
(601) 961-5171
www.deq.state.ms.us



Mississippi Department of
Environmental Quality

FOREWORD

This report has been prepared in accordance with the schedule contained within the federal consent decree dated December 22, 1998. The report contains one or more Total Maximum Daily Loads (TMDLs) for water body segments found on Mississippi's 1996 Section 303(d) List of Impaired Water bodies. Because of the accelerated schedule required by the consent decree, many of these TMDLs have been prepared out of sequence with the State's rotating basin approach. The implementation of the TMDLs contained herein will be prioritized within Mississippi's rotating basin approach.

The amount and quality of the data on which this report is based are limited. As additional information becomes available, the TMDLs may be updated. Such additional information may include water quality and quantity data, changes in pollutant loadings, or changes in landuse within the watershed. In some cases, additional water quality data may indicate that no impairment exists.

Conversion Factors

To convert from	To	Multiply by	To convert from	To	Multiply by
mile ²	acre	640	acre	ft ²	43560
km ²	acre	247.1	days	seconds	86400
m ³	ft ³	35.3	meters	feet	3.28
ft ³	gallons	7.48	ft ³	gallons	7.48
ft ³	liters	28.3	hectares	acres	2.47
cfs	gal/min	448.8	miles	meters	1609.3
cfs	MGD	0.646	tonnes	tons	1.1
m ³	gallons	264.2	µg/l * cfs	gm/day	2.45
m ³	liters	1000	µg/l * MGD	gm/day	3.79

Fraction	Prefix	Symbol	Multiple	Prefix	Symbol
10 ⁻¹	deci	d	10	deka	da
10 ⁻²	centi	c	10 ²	hecto	h
10 ⁻³	milli	m	10 ³	kilo	k
10 ⁻⁶	micro	:	10 ⁶	mega	M
10 ⁻⁹	nano	n	10 ⁹	giga	G
10 ⁻¹²	pico	p	10 ¹²	tera	T
10 ⁻¹⁵	femto	f	10 ¹⁵	peta	P
10 ⁻¹⁸	atto	a	10 ¹⁸	exa	E

TABLE OF CONTENTS

TMDL INFORMATION PAGE.....	4
EXECUTIVE SUMMARY	5
INTRODUCTION	6
1.1 Background.....	6
1.2 Stressor Identification.....	7
1.3 Applicable Water Body Segment Use	7
1.4 Applicable Water Body Segment Standard	7
1.5 Nutrient Target Development	8
WATER BODY ASSESSMENT	9
2.1 Stinson Creek Water Quality Data.....	9
2.2 Assessment of Point Sources	9
2.3 Assessment of Non-Point Sources.....	9
2.4 Estimated Existing Load for Total Nitrogen.....	10
2.5 Estimated Existing Load for Total Phosphorus	11
ALLOCATION.....	12
3.1 Wasteload Allocation.....	12
3.2 Load Allocation	12
3.3 Incorporation of a Margin of Safety	12
3.4 Calculation of the TMDL.....	13
3.5 Seasonality and Critical Condition	13
CONCLUSION.....	14
4.1 Public Participation.....	14
REFERENCES	15

FIGURES

Figure 1. Stinson Creek.....	5
Figure 2. Stinson Creek §303(d) Listed Segments	6
Figure 3. Landuse in Stinson Creek Watershed.....	10

TABLES

Table 1. Listing Information.....	4
Table 2. Water Quality Standards.....	4
Table 3. Total Maximum Daily Load for Nutrients and TBODu.....	4
Table 4. Stinson Creek Nutrient Data.....	9
Table 5. Nutrient Loadings for Various Land Uses.....	9
Table 6. Landuse Distribution for Stinson Creek Watershed	10
Table 7. Estimated Existing Total Nitrogen Load for Stinson Creek.....	11
Table 8. Estimated Existing Total Phosphorus Load for Stinson Creek.....	11
Table 9. TN, TP, and TBODu Total Maximum Daily Load based on Ecoregion Range.....	13

TMDL INFORMATION PAGE

Table 1. Listing Information

Name	ID	County	HUC	Cause	Stressors
Stinson Creek	MS012E	Lowndes	03160101	Biological Impairment	Nutrients and Organic Enrichment / Low Dissolved Oxygen
Location: Near Columbus Air Force Base from Headwaters to Columbus Lake					

Table 2. Water Quality Standards

Parameter	Beneficial use	Water Quality Criteria
Nutrients	Aquatic Life Support	Waters shall be free from materials attributable to municipal, industrial, agricultural, or other dischargers producing color, odor, taste, total suspended solids, or other conditions in such degree as to create a nuisance, render the waters injurious to public health, recreation, or to aquatic life and wildlife, or adversely affect the palatability of fish, aesthetic quality, or impair the waters for any designated uses.
Dissolved Oxygen	Aquatic Life Support	DO concentrations shall be maintained at a daily average of not less than 5.0 mg/l with an instantaneous minimum of not less than 4.0 mg/l

Table 3. Total Maximum Daily Load for Nutrients and TBODu

Stream Name		WLA lbs/day	LA lbs/day	MOS	TMDL lbs/day
Stinson	TN	0.0	63.6 – 74.2	Implicit	63.6 – 74.2
Stinson	TP	0.0	6.4 – 10.6	Implicit	6.4 – 10.6
Stinson	TBODu	0.0	0.0	Implicit	0.0

EXECUTIVE SUMMARY

This TMDL has been developed for Stinson Creek which was placed on the Mississippi 1996 Section 303(d) List of Impaired Water Bodies due to evaluated causes of nutrients and organic enrichment / low dissolved oxygen. MDEQ completed biological monitoring on Stinson Creek, which indicated biological impairment. It was determined that the biological impairment is most likely due to nutrients, organic enrichment and low dissolved oxygen and sediment. (MDEQ, 2006) However, sediment will be addressed in a separate TMDL report. This TMDL will provide an estimate of the total nitrogen (TN) and total phosphorus (TP) in the stream.

Mississippi does not have water quality standards for allowable nutrient concentrations. MDEQ currently has a Nutrient Task Force (NTF) working on the development of criteria for nutrients. An annual concentration range of 0.6 to 0.7 mg/l is an applicable target for TN and 0.06 to 0.10 mg/l for TP for water bodies located in Ecoregion 65. MDEQ is presenting these ranges as preliminary target values for TMDL development which is subject to revision after the development of numeric nutrient criteria.

The Stinson Creek Watershed is located in HUC 03160101 near Columbus Air Force Base in Lowndes County. Stinson Creek flows for 2.7 miles in a southwest direction from intermittent headwaters to the confluence with the Columbus Lake.

Because the critical 7Q10 flow of Stinson Creek is zero, a predictive model was not needed to determine that this stream is not an appropriate receiving water body for waste water effluent. The TBOD_u TMDL was set to zero. The limited total nitrogen data indicates reductions of nonpoint sources are needed.



Figure 1. Stinson Creek

INTRODUCTION

1.1 Background

The identification of water bodies not meeting their designated use and the development of total maximum daily loads (TMDLs) for those water bodies are required by Section 303(d) of the Clean Water Act and the Environmental Protection Agency's (EPA) Water Quality Planning and Management Regulations (40 CFR part 130). The TMDL process is designed to restore and maintain the quality of those impaired water bodies through the establishment of pollutant specific allowable loads. This TMDL has been developed for the 2004 §303(d) listed segments shown in Figure 2.

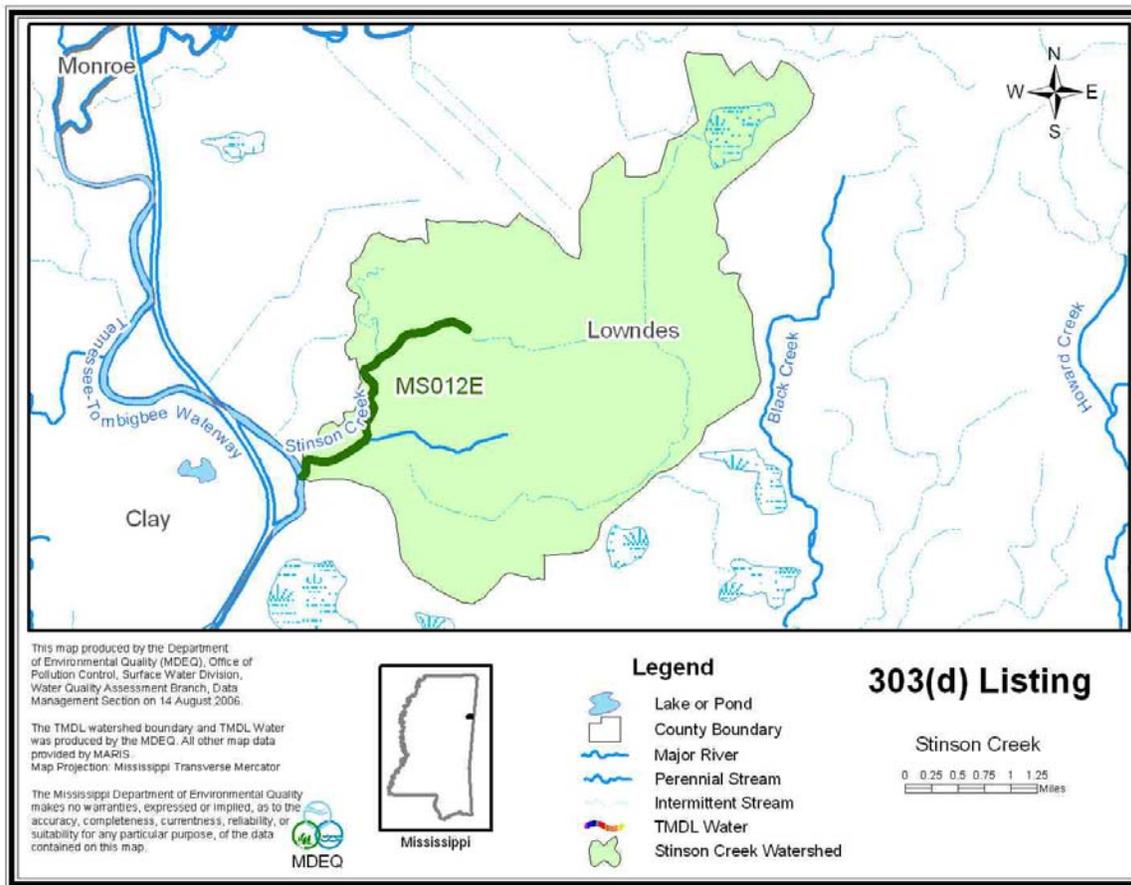


Figure 2. Stinson Creek §303(d) Listed Segments

The original listing was for the Stinson Creek drainage area. In 1998, MDEQ changed the practice of listing drainage areas. There were no monitoring data, so the stream remained on the evaluated portion of Mississippi's §303(d) list. MDEQ began a biological monitoring program, the M-BISQ, to monitor this and other evaluated streams to confirm water quality based on the health of the biology in the stream. Stinson Creek was confirmed as impaired based on the biology.

1.2 Stressor Identification

The impaired segments were listed due to failure to meet minimum water quality criteria for aquatic use support based on biological sampling (MDEQ, 2003). Because of these results, a detailed assessment of the watershed and potential pollutant sources, called a stressor identification report, was developed for each stream. The purpose of the stressor identification process is to identify the stressors and their sources most likely causing degradation of instream biological conditions. The results indicate that sediment, nutrients, and organic enrichment were the most likely stressors for Stinson Creek (MDEQ, 2006).

There are no state criteria in Mississippi for nutrients. These criteria are currently being developed by the Mississippi Nutrient Task Force in coordination with EPA Region 4. MDEQ proposed a work plan for nutrient criteria development that has been approved by EPA and is on schedule according to the approved plan in development of nutrient criteria (MDEQ, 2004). Data were collected for wadeable streams to calculate the nutrient criteria.

For this TMDL, MDEQ is presenting preliminary target ranges for TN and TP even though the limited data available only indicate issues with TN. An annual concentration range of 0.6 to 0.7 mg/l is an applicable target for TN and 0.06 to 0.10 mg/l for TP for water bodies located in Ecoregion 65. However, MDEQ is presenting these ranges as preliminary target values for TMDL development which is subject to revision after the development of nutrient criteria, when the work of the NTF is complete.

1.3 Applicable Water Body Segment Use

The water use classifications are established by the State of Mississippi in the document *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters* (MDEQ, 2003). The designated beneficial use for the listed segments is fish and wildlife.

1.4 Applicable Water Body Segment Standard

The water quality standard applicable to the use of the water body and the pollutant of concern is defined in the *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters* (MDEQ, 2003).

Mississippi's current standards contain a narrative criteria that can be applied to nutrients which states "*Waters shall be free from materials attributable to municipal, industrial, agricultural, or other discharges producing color, odor, taste, total suspended or dissolved solids, sediment, turbidity, or other conditions in such degree as to create a nuisance, render the waters injurious to public health, recreation, or to aquatic life and wildlife, or adversely affect the palatability of fish, aesthetic quality, or impair the waters for any designated use* (MDEQ, 2002)." In the 1999 Protocol for Developing Nutrient TMDLs, EPA suggests several methods for the development of numeric criteria for nutrients (USEPA, 1999). In accordance with the 1999 Protocol, "The target value for the chosen indicator can be based on: comparison to similar but unimpaired waters; user surveys; empirical data summarized in classification systems; literature values; or professional judgment." MDEQ believes the most economical and scientifically defensible method for use in Mississippi is a comparison between similar but unimpaired waters within the same region. This method is dependent on adequate data which are being collected in *Tombigbee River Basin*

accordance with the EPA approved plan. The initial phase of the data collection process for Wadeable streams is complete.

1.5 Nutrient Target Development

Nutrient data were collected quarterly at 99 discrete sampling stations state wide where biological data already existed. These stations were identified and used to represent a range of stream reaches according to biological health status, geographic location (selected to account for ecoregion, bioregion, basin and geologic variability) and streams that potentially receive non-point source pollution from urban, agricultural, and silviculture lands as well as point source pollution from NPDES permitted facilities.

Nutrient concentration data were not normally distributed; therefore, data were log transformed for statistical analyses. Data were evaluated for distinct patterns of various data groupings (stratification) according to natural variability. Only stations that were characterized as “least disturbed” through a defined process in the M-BISQ process (M-BISQ 2003) or stations that resulted in a biological impairment rating of “fully attaining” were used to evaluate natural variability of the data set. Each of these two groups was evaluated separately (“least disturbed sites” and “fully attaining sites”). Some stations were used in both sets, in other words, they were considered “least disturbed” and “fully attaining”. The number of stations considered “least disturbed” was 30 of 99, and the number of stations considered “fully attaining” was 53 of 99.

Several analysis techniques were used to evaluate nutrient data. Graphical analyses were used as the primary evaluation tool. Specific analyses used included; scatter plots, box plots, Pearson’s correlation, and general descriptive statistics.

In general, natural nutrient variability was not apparent based on box plot analyses according to the 4 stratification scenarios. Bioregions were selected as the stratification scheme to use for TMDLs in the Pascagoula Basin. However, this was not appropriate for some water bodies in smaller bioregions. Therefore, MDEQ now uses ecoregions as a stratification scheme for the water bodies in the remainder of the state.

In order to use the data set to determine possible nutrient thresholds, nutrient concentrations were evaluated as to their correlation with biological metrics. That thorough evaluation was completed prior to the Pascagoula River Basin TMDLs. The methodology and approach were verified. The same methodology was applied to the subsequent ecoregions.

For the preliminary target concentration range the means of the data at each of the nutrient sites were taken. Then the 75th and 90th percentiles of the means were taken of the nutrient sites in that ecoregion that are fully supporting for aquatic life support according to the M-BISQ scores. For the estimate of the existing concentrations the median was taken of the data from the sites that were not attaining and had nutrient concentrations greater than the target.

WATER BODY ASSESSMENT

2.1 Stinson Creek Water Quality Data

The available data for Stinson Creek were collected during an ambient monitoring visit in 1999 and the IBI study in 2003. The total nitrogen and total phosphorus data are in Table 4.

Table 4. Stinson Creek Nutrient Data

Station ID	Program	Location	Date	Time	TN (mg/l)	TP (mg/l)
TB014	Ambient Station	At Stinson Creek Road	9/10/1999	11:15	0.36	0.02
IBI - 827	M-BISQ	Above Stinson Creek Road	2/12/2003	11:00	1.29	0.04

2.2 Assessment of Point Sources

There are no point sources in the watershed.

2.3 Assessment of Non-Point Sources

Non-point loading of nutrients and organic material in a water body results from the transport of the pollutants into receiving waters by overland surface runoff and groundwater infiltration. Phosphorus is typically seen as the limiting nutrient in most non-point source dominated rivers and streams (Thomann and Mueller, 1987). However, the total phosphorus (TP) data for this stream is below the target for TP in Ecoregion 65. Therefore, these TMDLs will address a reduction of total nitrogen (TN). TN is primarily transported by runoff when it has been sorbed by eroding sediment. Most non-point sources of nitrogen will build up and then wash off during rain events. Table 5 presents typical nutrient loading ranges for various land uses.

Table 5. Nutrient Loadings for Various Land Uses

Landuse	Total Phosphorus [lb/acre-y]			Total Nitrogen [lb/acre-y]		
	Minimum	Maximum	Median	Minimum	Maximum	Median
Roadway	0.53	1.34	0.98	1.2	3.1	2.1
Commercial	0.61	0.81	0.71	1.4	7.8	4.6
Single Family-Low Density	0.41	0.57	0.49	2.9	4.2	3.6
Single Family-High Density	0.48	0.68	0.58	3.6	5.0	5.2
Multifamily Residential	0.53	0.72	0.62	4.2	5.9	5.0
Forest	0.09	0.12	0.10	1.0	2.5	1.8
Grass	0.01	0.22	0.12	1.1	6.3	3.7
Pasture	0.01	0.22	0.12	1.1	6.3	3.7

Source: Horner et al., 1994 in Protocol for Developing Nutrient TMDLs (USEPA 1999)

The drainage area of Stinson Creek is approximately 7,836 acres or 12.2 square miles. The watershed contains many different landuse types, including urban, forest, cropland, pasture, water, and wetlands. The landuse information given below is based on data collected by the State of Mississippi's Automated Resource Information System (MARIS) 1997. This data set is based on Landsat Thematic Mapper digital images taken between 1992 and 1993. Forest and

pasture are the dominant landuses within this watershed. The landuse distribution for Stinson Creek is shown in Table 6 and Figure 3.

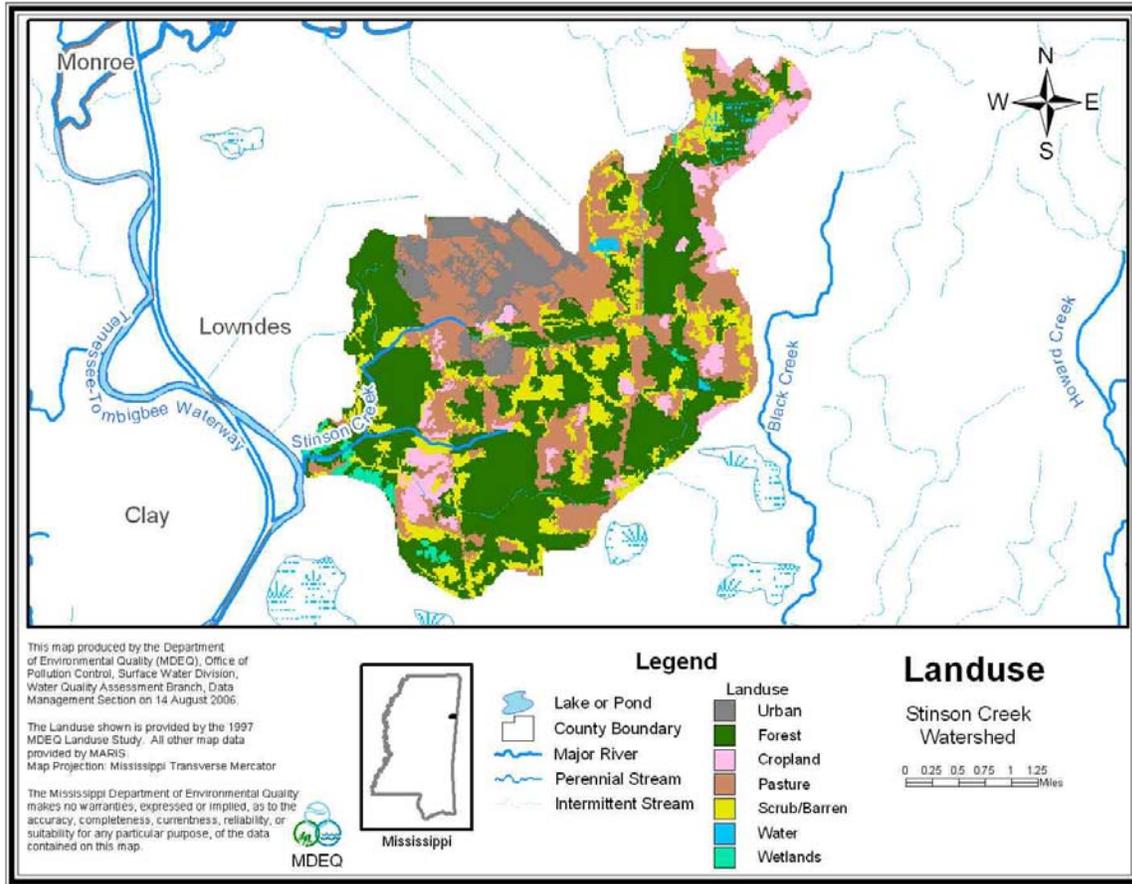


Figure 3. Landuse in Stinson Creek Watershed

Table 6. Landuse Distribution for Stinson Creek Watershed

In Acres	Urban	Forest	Cropland	Pasture	Scrub/Barren	Water	Wetlands
Stinson	562.6	3379.4	520.4	2067.2	1168	35.3	103.6
Percentage	7.2	43.1	6.6	26.4	14.9	0.5	1.3

2.4 Estimated Existing Load for Total Nitrogen

The estimated existing total nitrogen concentration is based on the median total nitrogen concentrations measured in wadeable streams in Ecoregion 65 with impaired biology and elevated nutrients, which is 1.38 mg/l. The concentration found in this stream during the M-BISQ monitoring is close to this, 1.29 mg/l. To be conservative, the targeted reductions will be based on the average total nitrogen level for impaired streams in Ecoregion 65.

To convert the estimated existing total nitrogen concentration to a total nitrogen load, the average annual flow was estimated based on flow data from the USGS gage 2443500 (Luxapilila at Columbus). To estimate the amount of flow in the Stinson Creek Drainage Area, a drainage area ratio was calculated (1148 cfs / 715 square miles = 1.606 cfs/square mile). The ratio was then multiplied by the drainage area in square miles of the impaired segment. The existing TN load was then calculated, using Equation 1.

Nutrient Load (lb/day) = Flow (cfs) * 5.394 (conversion factor)* Nutrient Concentration (mg/L)
(Eq. 1)

Table 7. Estimated Existing Total Nitrogen Load for Stinson Creek

Stream	Area (sq miles)	Average Annual Flow (cfs)	TN (mg/l)	TN (lbs/day)
Stinson Creek	12.2	19.7	1.38	146.3

2.5 Estimated Existing Load for Total Phosphorus

The estimated existing total phosphorus concentration is based on the median total phosphorus concentrations measured in wadeable streams in Ecoregion 65 with impaired biology and elevated nutrients, which is 0.18 mg/l. This equates to 19.1 pounds per day of TP in the stream. The concentration found in this stream during the M-BISQ monitoring is below this level and the target levels. The existing load equals 3.18 pounds per day. The target concentration for TP for Ecoregion 65 is 0.06 to 0.10 mg/l. The target loads for TP equal 6.4 to 10.6 pounds per day so no reduction of TP is required by this TMDL.

To convert the estimated existing total phosphorus concentration to a total phosphorus load, the average annual flow was estimated based on flow data as shown above. The existing TP load was then calculated, using Equation 1 and the average TP measured in the stream.

Table 8. Estimated Existing Total Phosphorus Load for Stinson Creek

Stream	Area (sq miles)	Average Annual Flow (cfs)	TP (mg/l)	TP (lbs/day)
Stinson Creek	12.2	19.7	0.03	3.18

ALLOCATION



The allocation for this TMDL involves a wasteload allocation and a load allocation for non-point sources necessary for attainment of water quality standards in the Stinson Creek. The nutrient portion of this TMDL is addressed through initial estimates of the existing and target total nitrogen concentrations.

3.1 Wasteload Allocation

There are no point sources in the impaired segments. Therefore the waste load allocation has been set to zero for the TMDLs for TN, TP, and TBODu. Future permits will be considered in accordance with Mississippi's *Wastewater Regulations for National Pollutant Discharge Elimination System (NPDES) Permits, Underground Injection Control (UIC) Permits, State Permits, Water Quality Based Effluent Limitations and Water Quality Certification*.

3.2 Load Allocation

Best management practices (BMPs) are recommended in this watershed to reduce potential total nitrogen loads from non-point sources. This watershed should be considered a priority for riparian buffer zone restoration and nutrient reduction BMPs. For land disturbing activities related to silviculture, construction, and agriculture, it is recommended that practices, as outlined in "Mississippi's BMPs: Best Management Practices for Forestry in Mississippi" (MFC, 2000), "Planning and Design Manual for the Control of Erosion, Sediment, and Stormwater" (MDEQ, et. al, 1994), and "Field Office Technical Guide" (NRCS, 2000), be followed, respectively.

3.3 Incorporation of a Margin of Safety

The margin of safety is a required component of a TMDL and accounts for the uncertainty about the relationship between pollutant loads and the quality of the receiving water body. The two types of MOS development are to implicitly incorporate the MOS using conservative model

assumptions or to explicitly specify a portion of the total TMDL as the MOS. The MOS selected for this model is implicit.

3.4 Calculation of the TMDL

A predictive model was not used to calculate the dissolved oxygen TMDL due to the 7Q10 flow being zero. The TBODu TMDL has been set to zero. Equation 1 was used to calculate the TMDL for TN and TP. The target concentration was used with the average flow for the watershed to determine the TMDL. The TMDL was then compared to the estimated existing load previously calculated and the limited data available. The limited total nitrogen data indicates needed reductions of 49% to 56%. The TMDL for TN is 63.6 – 74.2 lbs/day. The calculated existing load is 146.3 lbs/day.

The Total Phosphorus TMDL was calculated to be 6.4 – 10.6 pounds per day which data indicate the stream is currently meeting. No reduction in TP is required by the TMDL.

Table 9. TN, TP, and TBODu Total Maximum Daily Load based on Ecoregion Range

Stream	Area (sq miles)	Average Annual Flow (cfs)	Concentration (mg/l)	Load (lbs/day)
Stinson TN	12.2	19.7	0.6 – 0.7	63.6 – 74.2
Stinson TP	12.2	19.7	0.06 – 0.10	6.4 – 10.6
Stinson TBODu	12.2	19.7	0.0	0.0

3.5 Seasonality and Critical Condition

This TMDL accounts for seasonal variability by requiring allocations that ensure year-round protection of water quality standards, including during critical conditions.

CONCLUSION

Nutrients were addressed through an estimate of a preliminary total nitrogen and total phosphorus concentration target ranges. Based on the estimated existing and target total nitrogen concentrations, this TMDL recommends a 49% - 56% reduction of the nitrogen loads entering these streams to meet the preliminary target range of 0.6 to 0.7 mg/l. It is recommended that Stinson Creek Drainage Area be considered as a priority watershed for riparian buffer zone restoration and nutrient reduction BMPs. The implementation of these BMP activities should reduce the nutrient load entering the creeks. This will provide improved water quality for the support of aquatic life in the water bodies and will result in the attainment of the applicable water quality standards.

4.1 Public Participation

This TMDL will be published for a 30-day public notice. During this time, the public will be notified by publication in the statewide newspaper. The public will be given an opportunity to review the TMDLs and submit comments. MDEQ also distributes all TMDLs at the beginning of the public notice to those members of the public who have requested to be included on a TMDL mailing list. Anyone wishing to become a member of the TMDL mailing list should contact Greg Jackson at Greg_Jackson@deq.state.ms.us.

All comments should be directed to Greg Jackson at Greg_Jackson@deq.state.ms.us or Greg Jackson, MDEQ, PO Box 10385, Jackson, MS 39289. All comments received during the public notice period and at any public hearings become a part of the record of this TMDL and will be considered in the submission of this TMDL to EPA Region 4 for final approval.

REFERENCES

- MDEQ. 2006. *Stressor Identification Report for Stinson Creek*. Office of Pollution Control.
- MDEQ. 2004. *Mississippi's Plan for Nutrient Criteria Development*. Office of Pollution Control.
- MDEQ. 2003. Development and Application of the Mississippi Benthic Index of Stream Quality (M-BISQ). June 30, 2003. Prepared by Tetra Tech, Inc., Owings Mills, MD, for the Mississippi Department of Environmental Quality, Office of Pollution Control, Jackson, MS. (*For further information on this document, contact Randy Reed [601-961-5158]*).
- MDEQ. 2003. *State of Mississippi Water Quality Criteria for Intrastate, Interstate, and Coastal Waters*. Office of Pollution Control.
- USEPA. 2000. *Stressor Identification Guidance Document*. EPA/822/B-00/025. Office of Water, Washington, DC.
- USEPA. 1999. *Protocol for Developing Nutrient TMDLs*. EPA 841-B-99-007. Office of Water (4503F), United States Environmental Protection Agency, Washington D.C. 135 pp.
- MDEQ. 1994. *Wastewater Regulations for National Pollutant Discharge Elimination System (NPDES) Permits, Underground Injection Control (UIC) Permits, State Permits, Water Quality Based Effluent Limitations and Water Quality Certification*. Office of Pollution Control.
- Telis, Pamela A. 1992. *Techniques for Estimating 7-Day, 10-Year Low Flow Characteristics for Ungaged Sites on Streams in Mississippi*. U.S. Geological Survey, Water Resources Investigations Report 91-4130.
- Metcalf and Eddy, Inc. 1991. *Wastewater Engineering: Treatment, Disposal, and Reuse 3rd ed.* New York: McGraw-Hill.
- Thomann and Mueller. 1987. *Principles of Surface Water Quality Modeling and Control*. New York: Harper Collins.