Woolmarket Professional Plaza 13061 Shriners Blvd., Suite C Biloxi, Mississippi 39532 Office (228) 392-1638 Fax (228) 392-1679 Cell (228) 860-8161 dennis@dsaeng.net

April 11, 2022

Florance Bass, P.E. Mississippi Office Of Pollution Control Municipal Permit Compliance Section 515 E Amite St. Jackson, MS 39201

Re:

Osprey Landing Subdivision (72 lots)

Jackson County

Ms. Bass:

Submitted herewith (via MDEQ web portal) is one (1) set of drainage construction plans for the above referenced consisting of the Erosion Control Plan, Drainage Plan and Detention Basin Details which includes the Storm Water Pollution Prevention Plan and Lot Maintenance Plan along with the post-construction elevations, grades and construction details. Enclosed is the "Large Construction Notice of Intent (LCNOI)" for the Storm Water NPDES permit for your review and approval and note that the wetlands permit is currently being processed by the COE.

Thank you for your assistance and please let us know if you have any questions or if any additional information is needed.

Yours very truly,

Dennis Stieffel, P.E.

President

Enc.

860-3.wpd



MISSISSIPPI DEPARTMENT OF ENVIRONMENTAL QUALITY (MDEQ) Large Construction Storm Water General Permit NPDES Permit MSR10

LARGE CONSTRUCTION FORMS PACKAGE

•	LARGE CONSTRUCTION NOTICE OF INTENT (LCNOI) FORM	2
•	PRIME CONTRACTOR CERTIFICATION FORM	7
•	REGISTRATION FORM FOR RESIDENTIAL LOT COVERAGE	8
•	SITE INSPECTION AND CERTIFICATION FORM.	12
•	MAJOR MODIFICATION FORM.	. 13
•	REQUEST FOR TRANSFER OF PERMIT, GENERAL PERMIT COVERAGE AND/OR NAME CHANGE	. 14
•	INSPECTION SUSPENSION FORM	. 16
•	REQUEST FOR TERMINATION OF COVERAGE	17

These standard forms are used to apply for permit coverage under the Large Construction Storm Water General Permit and for submittals and record keeping required by permit conditions after coverage has been granted. The forms are on our website at www.deq.state.ms.us/MDEQ.nsf/page/epd epdgeneral. Required information can be completed on screen, printed and signed.

Revised: 12/06/16



LARGE CONSTRUCTION NOTICE OF INTENT (LCNOI) FOR COVERAGE UNDER THE LARGE CONSTRUCTION STORM WATER GENERAL NPDES PERMIT

INSTRUCTIONS

The Large Construction Notice of Intent (LCNOI) is for coverage under the Large Construction General Permit for land disturbing activities of five (5) acres or greater; or for land disturbing activities, which are part of a larger common plan of development or sale that are initially less than five (5) acres but will ultimately disturb five (5) or more acres. Applicant must be the owner or operator. For construction activities, the operator is typically the prime contractor. The owner(s) of the property and the prime contractor associated with regulated construction activity on the property have joint and severable responsibility for compliance with the Large Construction Storm Water General Permit MSR10.

If the company seeking coverage is a corporation, a limited liability company, a partnership, or a business trust, attach proof of its registration with the Mississippi Secretary of State and/or its Certificate of Good Standing. This registration or Certificate of Good Standing must be dated within twelve (12) months of the date of the submittal of this coverage form. Coverage will be issued in the company name as it is registered with the Mississippi Secretary of State.

Completed LCNOIs should be filed at least thirty (30) days prior to the commencement of construction. Discharge of storm water from large construction activities without written notification of coverage is a violation of state law.

Submittals with this LCNOI must include:

- A site-specific Storm Water Pollution Prevention Plan (SWPPP) developed in accordance with ACT5 of the General Permit
- A detailed site-specific scaled drawing showing the property layout and the features outlined in ACT5 of the General Permit
- A United States Geological Survey (USGS) quadrangle map or photocopy, extending at least one-half mile beyond the facility property boundaries with the site location and outfalls outlined or highlighted. The name of the quadrangle map must be shown on all copies. Quadrangle maps can be obtained from the MDEQ, Office of Geology at 601-961-5523.

Additional submittals may include the following, if applicable:

- Appropriate Section 404 documentation from U.S. Army Corps of Engineers
- Appropriate documentation concerning future disposal of sanitary sewage and sewage collection system construction
- Appropriate documentation from the MDEQ Office of Land & Water concerning dam construction and low flow requirements
- Approval from County Utility Authority in Hancock, Harrison, Jackson, Pearl River and Stone Counties

ALL QUESTIONS MUST BE ANSWERED (Answer "NA" if the question is not applicable)

$MSR10_{-}$	
(NUMBER TO BE ASSI	IGNED BY STATE)

APPLICANT IS THE:	✓ OWNER □ PRIM	IE CONTRACTOR			
OWNER CONTACT INFORMATION					
OWNER CONTACT PERSON:	Richard Baudry, Membe	r			
OWNER COMPANY LEGAL N	NAME: Osprey Landing, LI	_C			
OWNER STREET OR P.O. BO					
OWNER CITY: Biloxi	ST	ATE: MS	ZIP: 395	530	
OWNER CITY: Biloxi OWNER PHONE #: (228)	18-0040 cell OWNER	REMAIL: rbaudry1@g	mail.com		
	ME CONTRACTOR CO				
PRIME CONTRACTOR CONT					
PRIME CONTRACTOR COMI					
PRIME CONTRACTOR STRE					
PRIME CONTRACTOR CITY:					
PRIME CONTRACTOR PHON					
		VIEODIA TIONI			
	FACILITY SITE IN				
FACILITY SITE NAME: Ospre	ey Landing (aka Bayou Hill) Subdi	VISION			
FACILITY SITE ADDRESS (If indicate the beginning of the proje	ct and identify all counties the pro	ble, please indicate the neare oject traverses.)	est named road. For line	ear projects	
STREET: Fort Bayou Roa	adSTATE: MS	GOV DUTTY Lasks and	710	20505	
		_	ZIP:	39565	
FACILITY SITE TRIBAL LAN					
LATITUDE: 30 degrees 28				ds	
LAT & LONG DATA SOURCE			Google Laitii		
TOTAL ACREAGE THAT WII	LL BE DISTURBED 1: 20 act				
IS THIS PART OF A LARGER	COMMON PLAN OF DEVEL		YES \square	NO 🗹	
IF YES, NAME OF LARGER C AND PERMIT COVERA	COMMON PLAN OF DEVELO GE NUMBER: MSR10 <u>7 7 9</u> 2	PMENT: n/a			
ESTIMATED CONSTRUCTION	N PROJECT START DATE:		2022-08-01	-	
ECTIMATED CONCEDITOTION	N DDO IECT END DATE.		YYYY-MM-DD 2023-08-31		
ESTIMATED CONSTRUCTION			YYYY-MM-DD	-	
DESCRIPTION OF CONSTRU	CTION ACTIVITY: Single-fa	mily residential subdivisi	on		
PROPOSED DESCRIPTION OF Single-family residential subdivis	F PROPERTY USE AFTER CO	ONSTRUCTION HAS BE	EN COMPLETED:		
SIC Code 1 6 0 0 1	NAICS Code 2 3 7				

NEAREST NAMED RECEIVING STREAM: Fort Bayou		
IS RECEIVING STREAM ON MISSISSIPPI'S 303(d) LIST OF IMPAIRED WATER BODIES? (The 303(d) list of impaired waters and TMDL stream segments may be found on MIhttp://www.deq.state.ms.us/MDEQ.nsf/page/TWB_Total_Maximum_Daily_Load_Section)	YES□ DEQ's web site:	NO☑
HAS A TMDL BEEN ESTABLISHED FOR THE RECEIVING STREAM SEGMENT?	YES□	NO☑
ARE THERE RECREATIONAL STREAMS, PRIVATE/PUBLIC PONDS OR LAKES WITHIN ½ MILE DOWNSTREAM OF PROJECT BOUNDRY THAT MAY BE IMPACTED ACTIVITY?	YES□ BY THE CONS	NO ☑ TRUCTION
EXISTING DATA DESCRIBING THE SOIL (for linear projects please describe in SWPPP): sandy clay		
WILL FLOCCULANTS BE USED TO TREAT TURBIDITY IN STORM WATER?	YES□	NO☑
IF YES, INDICATE THE TYPE OF FLOCCULANT. ANIONIC POLYACRYLI OTHER	MIDE (PAM)	
IF YES, DOES THE SWPPP DESCRIBE THE METHOD OF INTRODUCTION, THE LOCA AND THE LOCATION OF WHERE FLOCCULATED MATERIAL WILL SETTLE?	TION OF INTRO YES □	ODUCTION NO □

 $^{^{1}}$ Acreage for subdivision development includes areas disturbed by construction of roads, utilities and drainage. Additionally, a housesite of at least 10,000 ft² per lot (entire lot, if smaller) shall be included in calculating acreage disturbed.

DOCUMENTATION OF COMPLIANCE WITH OTHER REGULATIONS/REQUIREMENTS COVERAGE UNDER THIS PERMIT WILL NOT BE GRANTED UNTIL ALL OTHER REQUIRED MDEQ PERMITS AND APPROVALS ARE SATISFACTORILY ADDRESSED

IS LC	CNOI FOR A FACILITY THAT WILL REQUIRE OTHER PERMITS?		YES 5	Z 1	NO 🗆
IF YI	ES, CHECK ALL THAT APPLY: AIR HAZARDOUS WASTE		PRETREA	ATMENT	
	\square WATER STATE OPERATING \square INDIVIDUAL NPDES	√	OTHER:	COE Wetlands	Permit
	IE PROJECT REROUTING, FILLING OR CROSSING A WATER CONVEYAN NY KIND? (If yes, contact the U.S. Army Corps of Engineers' Regulatory Branch		YES [ermitting re		NO 🗹
IF TH	HE PROJECT REQUIRES A CORPS OF ENGINEER SECTION 404 PERMIT, PUMENTATION THAT:	ROVI	DE APPRO	PRIATE	
•	The project has been approved by individual permit, or				
•	The work will be covered by a nationwide permit and NO NOTIFICATION to the	e Corp	s is require	d, or	
•	The work will be covered by a nationwide or general permit and NOTIFICATION	N to th	e Corps is 1	equired	
IS A I	LAKE REQUIRING THE CONSTRUCTION OF A DAM BEING PROPOSED? s, provide appropriate approval documentation from MDEQ Office of Land and V	Vater,	YES Dam Safety		NO 🗹
IF TH BE D	HE PROJECT IS A SUBDIVISION OR A COMMERCIAL DEVELOPMENT, HOISPOSED? Check one of the following and attach the pertinent documents.)W W	ILL SANIT	ARY SEW	AGE
	Existing Municipal or Commercial System. Please attach plans and specifications associated "Information Regarding Proposed Wastewater Projects" form or appr Hancock, Harrison, Jackson, Pearl River and Stone Counties. If the plans and specificated of LCNOI submittal, MDEQ will accept written acknowledgement from official(s) collection and treatment that the flows generated from the proposed project can approperly. The letter must include the estimated flow.	oval f tions () respo	rom County can not be p onsible for v	Utility Authorovided at vastewater	ority in the time
	Collection and Treatment System will be Constructed. Please attach a copy of the permit from MDEQ or indicate the date the application was submitted to MDEQ	cover (Date	of the NPD	ES dischar	ge)
	Individual Onsite Wastewater Disposal Systems for Subdivisions Less than 35 Los of General Acceptance from the Mississippi State Department of Health or certific engineer that the platted lots should support individual onsite wastewater disposal control of the	cation	from a regi	copy of the stered prof	Letter essional
	Individual Onsite Wastewater Disposal Systems for Subdivisions Greater than 35 feasibility of installing a central sewage collection and treatment system must be r response from MDEQ concerning the feasibility study must be attached. If a cent is not feasible, then please attach a copy of the Letter of General Acceptance from certification from a registered professional engineer that the platted lots should studisposal systems.	nade k ral co the S	y MDEQ. llection and tate Depart	A copy of the wastewater ment of Hea	ne r system alth or
INDI	CATE ANY LOCAL STORM WATER ORDINANCE WITH WHICH THE PRO	JECT	MUST CO	MPLY:	
n/a					

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Signature of Applicant (owner or prime contractor)

4/6/2022 Date Signed

Richard Baudry

Member

Printed Name¹

Title

¹This application shall be signed as follows:

· For a corporation, by a responsible corporate officer.

For a partnership, by a general partner.

For a sole proprietorship, by the proprietor.

For a municipal, state or other public facility, by principal executive officer, mayor, or ranking elected official

Please submit the LCNOI form to:

Chief, Environmental Permits Division

MS Department of Environmental Quality, Office of Pollution Control

P.O. Box 2261

Jackson, Mississippi 39225

PRIME CONTRACTOR CERTIFICATION

LARGE CONSTRUCTION GENERAL PERMIT

Coverage No. MSR10

County Jackson

(Fill in your Certificate of Coverage Number and County)



By completing and submitting this form to MDEQ, the prime contractor is certifying that (1) they have operational control over the erosion and sediment control specifications (including the ability to make modifications to such specifications) or (2) they have day-to-day operational control of those activities at the site necessary to ensure compliance with the SWPPP and applicable permit conditions.

The owner(s) of the property and the prime contractor associated with regulated construction activity on the property have joint and severable responsibility for compliance with the permit. Notwithstanding any permit condition to the contrary, the coverage recipient and any person who causes pollution of waters of the state or places waste in a location where they are likely to cause pollution of any waters of the state shall remain responsible under applicable federal and state laws and regulations and applicable permits.

PRIME CONTRACTOR INFORMATION

PRIME CONTRACTOR CONTACT PERSON: TBD	PHONE NUMBER: ()			
PRIME CONTRACTOR COMPANY:				
PRIME CONTRACTOR STREET (P.O. BOX):				
PRIME CONTRACTOR CITY:	STATE: ZIP:			
E-MAIL ADDRESS:				
OWNER INFORMA	ATION			
OWNER CONTACT PERSON:	PHONE NUMBER: ()			
OWNER COMPANY NAME:				
PROJECT INFORM	ATION			
PROJECT NAME: Osprey Landing (aka Bayou Hill) Subdivis	sion			
PROJECT NAME: Osprey Landing (aka Bayou Hill) Subdivision DESCRIPTION OF CONSTRUCTION ACTIVITY: Single-family representation of the construction o	residential subdivision			
PHYSICAL SITE ADDRESS (If the physical address is not available incindicate the beginning of the project and identify all counties the project	dicate the nearest named road. For linear projects, traverses.)			
STREET: Fort Bayou Road				
CITY: Ocean Springs COUNTY: Jac	ekson			
I certify that I am the prime contractor for this project and will comply with all the requirements in the above referenced general NPDES permit. I further certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.				
Prime Contractor Signature ¹	Date Signed			
Richard Baudry	Member			
Printed Name ¹	Title			

¹This application shall be signed as follows:

- application shall be signed as follows:

 For a corporation, by a responsible corporate officer.

 For a partnership, by a general partner.

 For a sole proprietorship, by the proprietor.

 For a municipal, state or other public facility, by principal executive officer, mayor, or ranking elected official.

This Prime Contractors Certification form shall be submitted to:

Chief, Environmental Permits Division MS Department of Environmental Quality, Office of Pollution Control P.O. Box 2261 Jackson, Mississippi 39225

Revised: 10/25/16

Keep a Copy at the Construction Site and Also Submit this Page to:
Chief, Environmental Permits Division
MS Department of Environmental Quality, Office of Pollution Control
P.O. Box 2261
Jackson, Mississippi 39225-2261

Registration Form for Residential Lot Coverage under Mississippi's Large Construction Storm Water General Permit INSTRUCTIONS



Coverage recipients for residential subdivision construction that do not retain responsibility for permit compliance for individual lots are to furnish this Registration to buyers of individual lots at the time of purchase. In addition, the attached Requirements for Individual Lots in Residential Subdivisions, the Site Inspection and Certification Form and the Large Construction Storm Water General Permit shall also be given to buyers of individual lots at the time of purchase. This form is providing notification to buyers of lots in residential developments, that being part of a "larger common plan of development or sale," coverage is required under Mississippi's Large Construction Storm Water General Permit. To comply with the permit, **the Registration Form must be submitted to MDEQ** at the address listed above and a Storm Water Pollution Prevention Plan (SWPPP) must be developed and implemented to reduce pollutants in storm water discharges during construction activity. **The SWPPP** is not required to be submitted to MDEQ. A copy of the SWPPP and Registration Form must be kept at the construction site or locally available (i.e., able to be produced within an hour of being requested by a state or local inspector). See the following attachments for information on SWPPP development. In addition, a copy of the completed Registration Form(s) must be retained by the developer and submitted to the MDEQ when requesting termination of permit coverage. If the buyer or homebuilder sells the lot before a house is built, they must provide this form to the new owner. All questions must be answered. Answer "NA" if the question is not applicable. For further information, contact MDEQ at 601/961-5171 or access our website address: www.deq.state.ms.us/MDEQ.nsf/page/epd_epdgeneral.

ORGINAL COVERAGE RECIPIENT NAME:	BUYER / HOMEBUILDER:			
COMPANY NAME:	COMPANY NAME (IF APPROPRIATE):			
STREET OR P.O. BOX:	STREET OR P.O. BOX:			
CITY: STATE: ZIP:	CITY: STATE: ZIP:			
PHONE # (INCLUDE AREA CODE):	BUYER PHONE # (INCLUDE AREA CODE):			
RESIDENTIAL SUBDIVISON NAME:				
LARGE CONSTRUCTION STORM WATER PERMIT	T COVERAGE NUMBER: MSR10: 218-0040			
LOT NUMBER(s) (attach an additional sheet if necessa	rry): LOT SIZE(s):			
PHYSICAL SITE ADDRESS (IF NOT AVAILABLE IT				
STREET:	,			
	UNTY:ZIP:			
I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the persons or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. As a buyer / homebuilder, I further certify that I have read and understand the terms and conditions of Mississippi's Large Construction Storm Water General Permit and that I am responsible for installing and maintaining the appropriate pollution control measures for the purchased lot(s) identified.				
	28 acres			
Original Coverage Recipient Signature ¹	Date Signed			
Printed Name	Title			
Buyer / Homebuilder Signature ¹	Date Signed			
Printed Nama	Titla			

REQUIREMENTS FOR LOTS IN RESIDENTIAL SUBDIVISION WHICH ARE COVERED BY THE LARGE CONSTRUCTION STORM WATER GENERAL PERMIT

As a homebuilder on a lot that is part of a regulated subdivision, you are also regulated under the State's storm water regulations and are required to take steps to keep soil and sediment from leaving the lot. When rain falls on exposed soil it can wash away valuable topsoil. It also carries sediment, nutrients and other pollutants into streets, gutters and ditches, where it then travels to lakes, rivers, streams or wetlands. Polluted runoff can cause excessive growth of aquatic weeds and algae and reduce recreational opportunities such as swimming and fishing. Sediment laden runoff can also destroy fish habitat reducing productive fishing opportunities. In addition, sediment-laden runoff can also clog pipes, ditches, streams and basins resulting in increased flooding and maintenance cost. Therefore, the homebuilder is required to minimize off-site damage from soil erosion, sediment leaving the construction site, and poor "housekeeping" practices. This requirement must be accomplished by developing and implementing a Storm Water Pollution Prevention Plan (SWPPP). Some examples of individual lot SWPPPs are attached for your convenience. Sketch the controls on a copy of your site plan. Narrative notes on the site plan may also be used in addition to the erosion control symbols.

In developing and implementing the SWPPP, controls must be used from each control group (vegetative, structural, housekeeping) to prevent erosion and sediment and other pollutants from leaving the site. Commonly used controls include:

Vegetative Controls

Temporary vegetation includes annual grasses that sprout quickly such as annual rye, browntop millet, oats, and winter wheat. These grow quickly with little care and can protect the soil from rainfall and act as a filter. They will not provide permanent cover. Permanent cover must be established as indicated below. When a disturbed area will be left undisturbed for fourteen (14) days or more, the appropriate temporary or permanent vegetative practices shall be implemented immediately.

Mulching is the placement of hay grass, woodchips, straw, or synthetic material on the soil to provide temporary cover to protect the soil from rain. Mulching may be the only option during the winter when seeding or sodding is not possible. Mulch must stay in place to be effective. Netting, stakes or chemical binders are used to anchor some types of mulch. Be sure to reinstall washed-out mulch and anchor if necessary until permanent cover is established.

Permanent stabilization is the establishment of a permanent vegetative cover on disturbed areas using either sod, perennial seed, trees or shrubs. When a disturbed area will be left undisturbed for fourteen (14) days or more, the appropriate temporary or permanent vegetative practices shall be implemented immediately. Silt fences, and other temporary measures must be removed following permanent stabilization.

Vegetative buffer zones are undisturbed or planted vegetated areas that are between construction activities and water bodies.

Structural Controls

Silt fences are temporary sediment barriers made of filter fabric buried at the bottom, stretched, and supported by stakes. The silt fence slows runoff and allows it to puddle or pond, so soil and sediment can settle out before leaving the site. The bottom eight to twelve inches of fence must either be sliced in or buried in a trench about four to six inches deep by four to six inches wide. **Silt fences that are not buried are improperly installed. They have no useful function, are a waste of money, and may result in enforcement action**. Stakes must be on the downstream side of the fence and spaced about 3 feet apart. Silt fence must not be installed across streams, ditches, waterways, or other concentrated flow areas. Place fences on the contour or perpendicular to the slope of the hill so that water and sediment will pond behind the fence. **Turn ends uphill** to prevent water going around the end. Install on the downslope, downhill, downstream, or low side of your lot. Keep the fence/barrier in place until grass is established.

Slope drains are piping or lined channels that carry storm water downslope without erosion. A good example would be a downspout extender. Extenders may be used to protect temporarily stabilized areas from roof runoff. Extenders can direct water from roof gutters to paved or grassed areas. Remove extenders following permanent stabilization.

Construction entrance/exits are stone stabilized site entrances which reduce sediment tracked onto public roads. Apply gravel or crushed rock to the driveway area and restrict traffic to this one route. Use 3 to 6 inch gravel over a geotextile fabric. At the end of each day sweep or scrape up any soil tracked onto the street. Limit "standard" vehicle access (including workers' vehicles) to only streets and roads, keep vehicles off of future yard areas; limit tracking of mud onto streets by requiring any required vehicles to use designated access drives. Streets are conduits for storm water, it is important to keep mud and sediment off the streets.

Stockpiles of sand or soil should be covered with plastic or tarps at the end of each workday, or surrounded with silt fence or haybales. Do not locate a stockpile near a street, storm drain inlet, or ditch.

Erosion control blankets or mats are machine-produced mats of straw or other fibers held together with netting that provide temporary or permanent stabilization in critical areas, such as slopes or channels, so that vegetation may be established.

Storm Drain Inlets on the lot must be protected by surrounding or covering with a filter material until final stabilization has been achieved.

Additional Controls: The above controls are the more common practices used at small construction sites. There are a number of other controls, techniques and manufactured product available. A few examples include hydro seeding, diversion berms, silt dikes and fiber logs. Even something as simple as a tarp or plastic may provide temporary cover for small exposed areas. You may wish to contact an erosion and sediment control specialist, local building official, or MDEQ for further information. In addition, MDEQ has several guidance manuals that may be of assistance and the internet has abundant guidance on construction BMPs.

Housekeeping Controls: Pollutants that may enter storm water from construction sites because of poor housekeeping include oils, grease, paints, gasoline, solvents, litter, debris, and sanitary waste. Good housekeeping practices include:


- Frequent cleaning of trash and debris, providing waste receptacles at convenient locations and providing regular collection of waste;
- Directing concrete trucks to the subdivision's designated wash-off area(s) or back to the Ready-Mix facility;
- Providing protected storage areas for chemicals, paints, solvents, fertilizers, and other potentially toxic materials; and
- Providing adequately maintained sanitary facilities.


In addition, you should be aware that State air regulations prohibit the open burning of residential solid waste.


Inspection Requirements. Homebuilders shall inspect all erosion controls as often as is necessary, but no less than weekly, to ensure that appropriate erosion and sediment controls have been properly constructed and maintained to prevent erosion and sediment from leaving the site and determine if additional or alternative control measures are required. The inspection results shall be recorded on the Site Inspection and Certification Form contained in the Large Construction Forms Package. MDEQ strongly recommends that homebuilders perform "walk through" inspections daily. It is a responsibility of the homebuilder to install additional and/or alternative erosion and sediment controls when existing controls prove to be ineffective in preventing sediment from leaving the site.


Retention of Records. All records, reports, forms and information resulting from activities required by this permit shall be retained for a period of at least three years from the date of the document origin.

Duty to Comply. Lot owners must comply with the applicable permit conditions. See Activities 3, 5, 6, 7, 10 and 11 in the Large Construction Storm Water General Permit for applicable conditions. Any noncompliance with the applicable permit conditions and aforementioned conditions including sediment leaving the lot constitutes a violation of the Mississippi Water Pollution Control Law and is grounds for enforcement action. It shall not be an acceptable defense that controls were not installed because subsequent activities would require their replacement or cause their destruction.

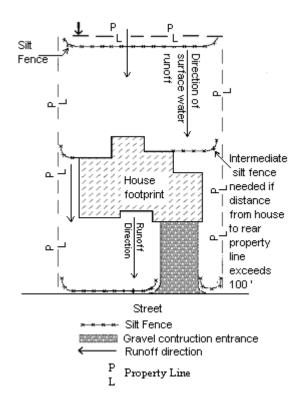

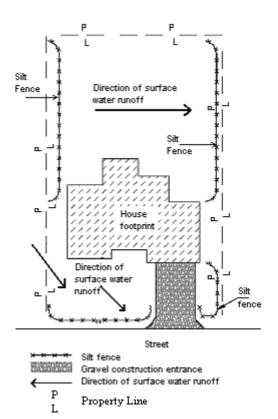

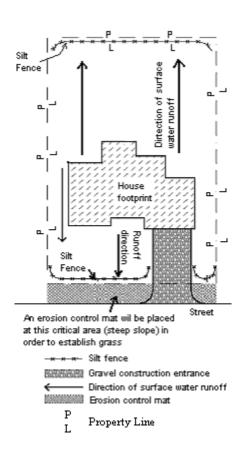

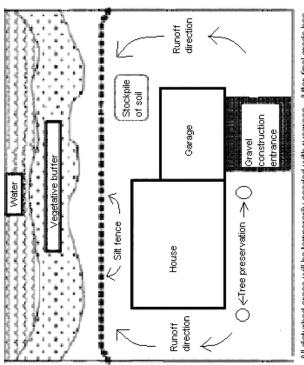

All disturbed areas will be temporarily seeded with ryegrass. After final grade has been reached, all disturbed areas will be sodded with bermuda grass.

Keep a Copy Available at the Permitted Facility or Locally Available Submit the Inspection Reports <u>Only if Requested</u> by the Mississippi Department of Environmental Quality (MDEQ)

LARGE CONSTRUCTION GENERAL PERMIT SITE INSPECTION AND CERTIFICATION FORM COVERAGE NUMBER (MSR10 _____)



INSTRUCTIONS

Results of construction storm water inspections required by ACT6 of this permit shall be recorded on this report form and kept with the Storm Water Pollution Prevention Plan (SWPPP) in accordance with the inspection documentation provisions of ACT9 of the this permit. Inspections shall be performed at least weekly for a minimum of four inspections per month. The coverage number must be listed at the top of all Inspection and Certification Forms.

	CO	VERAGE RECIPIENT INFO	URMATION
OWNER/PRIME CON	TRATOR NAME:		
PROJECT STREET A	DDRESS:		
PROJECT CITY:		PROJECT	COUNTY:
OWNER/PRIME CON	TRACTOR MAILING AI	DDRESS:	
MAILING CITY:		STATE:	ZIP:
CONTACT PERSON:		CONTAC	TT PHONE NUMBER: ()
EMAIL ADDRESS: _			
	ī	NSPECTION DOCUMENTA	ATION
DATE (mo/day/yr)	TIME (hr:min AM/PM)	ANY DEFICIENCIES? (CHECK IF YES)	INSPECTOR(S)
(mo/day/y1)	(III.IIIIII AW/1 WI)	(CHECK II TES)	INSI ECTOR(S)
Deficiencies Noted Dur	ing any Inspection (give o	date(s): attach additional sheets	s if necessary):
	mg any mapeonion (give t	(0),	, 12 10000000000000000000000000000000000
Corrective Action Take	n or Planned (give date(s)); attach additional sheets if ne	cessary):
Concentre Action Take	ii or r ianned (give date(s)	, attach additional sheets if he	
Based upon this inspection	which I or nersonnel under my	direct supervision conducted. I certi	fy that all erosion and sediment controls have been implemented
maintained, except for those	deficiencies noted above, in a		llution Prevention Plan (SWPPP) and sound engineering practice
qualified personnel properly information submitted is, to	gather and evaluate the informa	ation submitted. Based on my inquiry d belief, true, accurate and complete	etion or supervision in accordance with a system designed to assure of the person or persons responsible for gathering the information. I am aware that there are significant penalties for submitting f
Authorized Signature			Date
		Member	

Title

Printed Name

Revised: 12/10/16

MAJOR MODIFICATION FORM FOR LARGE CONSTRUCTION GENERAL PERMIT Coverage No. MSR10 ____ County ____



INSTRUCTIONS

Coverage recipients shall notify the Mississippi Department of Environmental Quality at least 30 days in advance of the following activities (check all that apply). This form should be submitted with a modified Storm Water Pollution Prevention Plan (SWPPP), updated USGS topographic map, Corps of Engineers Section 404 documentation and wastewater collection and treatment information, as appropriate.						
SWPPP details have been developed and are ready for MDEQ review for subsequent phases of an existing, covered project.						
"Footprint" identified in t	"Footprint" identified in the original LCNOI is proposed to be enlarged.					
This form must be signed by the current coverage recipient under Mississippi's Large Construction General Permit. A different developer of new phases of existing subdivisions must apply for separate permit coverage through the submittal of a new complete LCNOI package. Coverage recipients are authorized to discharge storm water associated with proposed expansions of existing subdivisions or subsequent phases, under the conditions of the General Permit, only upon receipt of written notification of approval by MDEQ. All other modifications, such as changes of erosion and sediment controls used, must be in accordance with ACT6, S-1 (6) and S-2 (7) of the General Permit.						
ALL INF	ORMATION MUST BE CO	MPLETED (indica	ate "N/A" where not applicable)			
	COVERAGE RE	CIPIENT INFO	ORMATION			
COVERAGE RECIPIENT CONTA	ACT NAME:		TEL#()			
COMPANY NAME:						
STREET OR P.O. BOX:						
CITY:	STATE:	ZIP:	E-MAIL:			
PROJECT INFORMATION						
CITY:						
ADDITIONAL ACREAGE TO BE	DISTURBED:		TOTAL PROJECT ACREAGE:			
with a system designed to assure inquiry of the person or persons information submitted is, to the b	that qualified personnel pro who manage the system, ourset of my knowledge and b	operly gathered and or those persons of belief, true, accura	pared under my direction or supervision in accound evaluated the information submitted. Based directly responsible for gathering the information at and complete. I am aware that there are sign imprisonment for knowing violations.	on my		
Signature (must be signed by cover	erage recipient)	_	Date			
Printed Name			Title			
Please submit this form to:	Chief, Environmental Permits MS Department of Environment P.O. Box 2261	Division ntal Quality, Office of	Pollution Control			

Jackson, Mississippi 39225

Revised: 12/12/16

Environmental Permits for Industrial Facilities Request for Transfer of Permit, General Permit Coverage and/or Name Change

Instructions: For Ownership Change-Complete all Items on Page 1 (except Item VIII) and Page 2 (reverse side). For Name Change Only-Complete Items I, II, V, VI, VII, VIII, and Page 2 (reverse side).

Note-This form should be submitted to MDEQ when a transferal date is finalized but prior to the actual transfer. Item I. Facility Name: ___ Responsible official after transfer or name change: Location: (Do Not Use P.O. Box) City: _____ State: <u>MS</u> Zip: _____ Mailing Address: Street/P.O. Box: ___ City: State: Zip: Telephone: () Telephone (_____)_____ Previous Permittee¹: New Permittee¹: Mailing Address: Mailing Address: Street/P.O. Box: Street/P.O. Box: City: State: Zip: City: State: Zip: Item VI Item V. Industrial Activity SIC Code: Will Facility Operations Change? Yes _____ No ____ Brief Description: If yes, the appropriate applications and permits may require modification prior to change. Item VII. Item VIII. Will Facility Name Change? Yes No Signature for Name Change Print Name: ____ If Yes, Provide New Name for Permit Coverage. Authorized Signature²: New Name: We the undersigned request transfer of permit(s) and/or permit coverage(s) listed on the backside of this form. Acquisition Date: By signature below, the recipient certifies that: 1) they are aware of the requirements of the permit(s), 2) the applicant can demonstrate to the Permit Board it has the financial resources and operational expertise and 3) agrees to accept responsibility and liability for the permit(s) listed on the back of this document. By signature below, the previous permittee is requesting that the permit(s) and/or permit coverage(s) be transferred to the recipient. The transfer of the permit(s) or permit coverage(s) will be by written notification from the Office of Pollution Control (OPC). The OPC may require submittal of information regarding financial capability and past compliance history of the recipient.

Print New Permittee ¹ Name		Print Previous Permittee ¹ Name		
New Authorized Signature ²		Previous Authorized Signature ²		
Title	Date	Title	Date	

¹A Permittee is a company or individual that has been issued an individual permit or coverage under a general permit.

²Authorized Signature must be owner or in the case of a corporation, a corporate officer as defined in Regulations 11 Miss. Admin. Code Pt. 2, Ch. 2. and 11 Miss. Admin. Code Pt. 6. Ch. 1.

Mississippi Department of Environmental Quality/Office of Pollution Control P.O. Box 2261 Jackson, Mississippi 39225

(601) 961-5171

Item X. Storm Water	Item XI. Hazardous Waste ID Number
(Check One)	
A Storm Water Pollution Prevention Plan (SWPPP) is not required for the site.	EPA ID No
The recipient certifies that they have received a copy of the Office of Pollution Control approved SWPPP from the original owner.	(Check One) An EPA Hazardous Waste ID Number is not required for the site.
The recipient is submitting a new SWPPP, which is attached to this form.	The site's EPA ID Number is listed above and a Notification of Regulated Waste Activity Form is attached.
A copy of the SWPPP cannot be obtained from the original owner.	
Item XII. Permit(s) and/or C	Coverage(s) to be Transferred
Permit Type:	Permit Type:
Permit/Coverage No.:	Permit/Coverage No.:
Permit Issuance Date:	Permit Issuance Date:
Date of General Permit Coverage:	Date of General Permit Coverage:
Permit Expiration Date:	Permit Expiration Date:
Permit Type:	Permit Type:
Permit/Coverage No.:	Permit/Coverage No.:
Permit Issuance Date:	Permit Issuance Date:
Date of General Permit Coverage:	Date of General Permit Coverage:
Permit Expiration Date:	Permit Expiration Date:
Permit Type:	Permit Type:
Permit/Coverage No.:	Permit/Coverage No.:
Permit Issuance Date:	Permit Issuance Date:
Date of General Permit Coverage:	Date of General Permit Coverage:
Permit Expiration Date:	Permit Expiration Date:
Permit Type:	OTHER INFORMATION:
Permit/Coverage No.:	
Permit Issuance Date:	
Date of General Permit Coverage:	
Permit Expiration Date:	
	2 of 2 DECEMBER 2016

INSPECTION SUSPENSION FORM

UNDER LARGE CONSTRUCTION STORM WATER GENERAL NPDES PERMIT MSR10



INSTRUCTIONS

Coverage recipients under Mississippi's Large Construction Storm Water General Permit may temporarily suspend required weekly inspections of erosion and sediment controls and monthly record keeping by submission of this form. Inspections may be suspended only when land disturbing activities have ceased, no further land disturbing activities are planned for a period of at least six (6) months, the site is stable with no active erosion, and vegetative cover has been established (see ACT9, S-1). The coverage recipient is responsible for all permit conditions during the suspension period and nothing in this condition shall limit the rights of MDEQ to take enforcement or other actions against the coverage recipient. Once land disturbing activities resume MDEQ must be notified and all inspections and record keeping required by the permit must also resume. Color photographs, representative of the construction site, must be submitted with this inspection form.

COVERAGE	RECIPIENT INFORMATI	ON
COVERAGE RECIPIENT CONTACT PERSON:		
COMPANY NAME:		
STREET OR P.O. BOX:		
CITY:		
PHONE # (INCLUDE AREA CODE):	E-MAIL:	
PROJ	JECT INFORMATION	
CONSTRUCTION STORM WATER GENERAL PER PROJECT NAME:		
CITY:		
I certify under penalty of law that this document and all a with a system designed to assure that qualified personnel inquiry of the person or persons who manage the system, information submitted is, to the best of my knowledge an penalties for submitting false information, including the penalties for submitting activities have ceased, no further months, the site is stable with no active erosion, and very submitted in the site is stable with no active erosion, and very submitted in the site is stable with no active erosion.	properly gathered and evaluated the or those persons directly responsible belief, true, accurate and complet possibility of fine and imprisonment land disturbing activities are plant.	e information submitted. Based on my le for gathering the information, the e. I am aware that there are significant t for knowing violations. I further certify anned for a period of at least six (6)
Signature (must be signed by coverage recipient)	Da	ate Signed
Printed Name		tle
Please submit this form to: Chief, Environmental MS Department of En	Permits Division	n Control

P.O. Box 2261

Jackson, Mississippi 39225

Revised: 12/10/2016

Request for Termination (RFT) of Coverage



LARGE CONSTRUCTION GENERAL PERMIT Coverage No. MSR10 County

(Fill in your Certificate of Coverage Number and County)

This form must be submitted within thirty (30) days of achieving final stabilization (see ACT10, S-1 of general permit). Failure to submit this form is a violation of permit conditions.

The signatory of this form must be the owner or operator (prime contractor) who is the current coverage recipient (rather than the project manager or environmental consultant).

(Please Print or Type)

Project Name: Physical Site Street Address (if not available, indicate nearest named road): County: ____ Coverage Recipient Company Name: Street Address / P.O. Box: Coverage Recipient Contact Name and Position: _____ Tel. #: (____) Has another owner(s) or operator(s) assumed control over all areas of the site that have not reached final stabilization? RESIDENTIAL SUBDIVISIONS: YES. A copy of the Registration Form for Residential Lot Coverage for each lot or out parcel that has been sold and a site map, indicating which lots have been sold, are attached. **◯** NO. Coverage may not be terminated until all areas have reached final stabilization. **COMMERCIAL DEVELOPMENT:** YES. A copy of the site map, indicating which out-parcels have been sold, is attached. NO. Coverage may not be terminated until all areas have reached final stabilization. I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fines and imprisonment for knowing violations. I understand that by submitting this Request for Termination and receiving written confirmation, I will no longer be authorized to discharge storm water associated with construction activity under this general permit. Discharging pollutants associated with construction activity to waters of the State without proper permit coverage is a violation of state law. I

also understand that the submittal of this Request for Termination does not release an owner or operator from liability for any violations of this permit or the Clean

Signature

¹This application shall be signed according to the General Permit, ACT11, T-7 as follows:

- For a corporation, by a responsible corporate officer.
- For a partnership, by a general partner.

Water Act.

Authorized Name (Print)

- For a sole proprietorship, by the proprietor.
- For a municipal, state or other public facility, by principal executive officer, mayor, or ranking elected official.

After signing please mail to: Chief, Environmental Permits Division

MS Department of Environmental Quality, Office of Pollution Control

Telephone

P.O. Box 2261

Jackson, Mississippi 39225

Date Signed

Dennis Stieffel and Associates, Consulting Engineers

SHEET

PROJECT NO. 860

SHEET PROJECT NO

860

STORM WATER POLLUTION PREVENTION PLAN

1) Vegetative buffer zones shall be maintained between land disturbing activities and perennial water bodies or planted vegetated areas. Buffer zones shall provide a minimum 150-ft buffer and shall be no less than 15 feet in width.

Vegetative controls shall be initiated no later than the next work day following any clearing, grading, excavating or other land disturbing activities which have temporarily or permanently ceased on any portion of the site and will not resume for a period of fourteen (14) days or more. Vegetative controls shall consist of Bermuda grass or other suitable ground cover grasses which will blend with the native vegetation and provide the desired stabilization and erosion protection. Solid sod may be used in areas prone to erosion due to isolated concentrations of surface drainage.

3) Structural controls shall consist of silt fencing, straw bales, rip-rap and/or erosion matting or some combination thereof at all points of discharge into existing drainage systems. The controls are to be left in place and maintained for the duration of the project. Upon satisfactory stabilization of site, structural controls shall be removed along with any and all silt build-up. Structural controls are to eliminate tracking of sediment in order to prevent any damage to the downstream tributaries or water ways and/or associated wetland areas. Best management practices (BMPs) will be utilized throughout the duration of the construction of the project. Stone-stabilized construction entrances (6" thick and 50' long) will be used to prevent sediment from being tracked onto public roads with tires being washed on an as-needed basis.

4) Inspection of all disturbed areas, erosion, sediment controls and outfalls/discharge points are required after rain events that produce a discharge and at least weekly for a minimum of four (4) inspections per month. Make needed repairs within 24 hours. All accumulated sediment shall be removed from structural controls when sediment deposits reach 1/3 to 1/2 the height of the control. For sediment basins, accumulated sediment shall be removed when the capacity has been reduced by 50%. Replace non-functional silt fence. Maintain all vegetated areas to provide proper ground cover and re-grass, fertilize and mulch as needed. Any silt removed shall be disposed of in nonwetland areas.

5) Topsoil shall be stockpiled and reapplied to disturbed areas at a depth of 2 inches on 3:1 slopes and 4 inches on flatter slopes with an admixture of commercial grade 13-13-13 fertilizer.

6) Heavy equipment use shall be avoided in re-grassed areas. If compaction cannot be avoided, the top 4 inches of the soil bed shall be tilled/scarified before re-vegetation. Any necessary fertilizer or other soil amendments shall be added during the tilling process. 7) Steep slopes that cannot be avoided shall have silt fences for all down slope boundaries (and for those side slope boundaries deemed appropriate by individual site conditions) with the exception of those areas incorporating sediment basins with a calculated volume of run-off from a 2-yr, 24-hr storm or 3,600 cubic feet of storage per acre drained as per the Erosion Control & Drainage Plan. Silt fencing shall be installed at the downstream boundaries of the proposed project to protect areas that are to remain undisturbed. 8) Storm drain inlets that could potentially receive storm water from construction activities shall be protected by surrounding with silt fence until final stabilization has been achieved. Additionally, the lower orifice in the outfall structure shall be temporarily plugged until

the completion of the construction of the project. 9) Maintenance of site and all erosion controls will be the Contractor's responsibility during construction and the Home Owner's Association (HOA) post construction with the Municipality having perpetual right of access via easements for emergency purposes.

SEQUENCE OF CONSTRUCTION ACTIVITIES: Silt fencing structural controls to be installed prior to any land disturbing activities taking place.

Construct construction entrance/exit(s).

 Construct sedimentation/detention basin(s) with appropriate grassing and/or rip-rap. 4) Rough grade site, construct diversions and drainage ways, stockpile topsoil and install silt fence around stockpile, install utilities,


culverts and inlets with associated silt fencing.


Install vegetative controls. Construct roadways, drives, parking and buildings.

Perform final grading, grassing and landscaping operations. 8) After site is stabilized, remove all temporary measures and any excess sedimentation from basins.

HOUSEKEEPING PRACTICES: All equipment maintenance and repair shall be done off-site. The site is to be cleaned of trash and construction debris on a weekly basis so as to prevent the spreading of such onto adjacent properties. Paints, solvents, fertilizers, and any other potentially toxic materials shall not be stored on site. Portable sanitary facilities will be provided for construction workers. A designated pit area is required near construction entrance(s) for concrete truck wash-out. Site shall be inspected weekly for spills and leaks. Any spills or leaks detected will be immediately cleaned with a dry absorbent material and absorbent oil socks shall be placed around any adjacent drainage inlets. Upon completion of construction, excessive sedimentation and/or pollutants shall be removed from sedimentation basin. Emergency spill kit and telephone shall be available for use for site. Any spills in danger of migrating off-site shall be immediately reported to the National Response Center at (800) 424-8802.

POST CONSTRUCTION/STORM WATER MANAGEMENT MEASURES: The individual lot/site protection plan consists of the installation of sedimentation/detention basin(s), silt fencing, hay bales and/or other erosion/siltation control measures in a continuous band across the downhill side of all disturbed areas including areas adjacent to streets. Under no circumstances will silt laden run-off be allowed to escape the site. Additionally, these requirements are to be an integral part of any sales contracts and recorded covenants for the development. Sedimentation/detention basin(s) are to be thoroughly cleaned of excess sediment after construction. Grassing and/or rip-rap will be placed at concentrated storm water discharge points to prevent erosion from high run-off velocities.

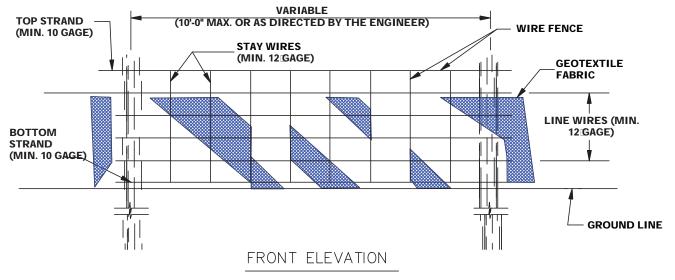

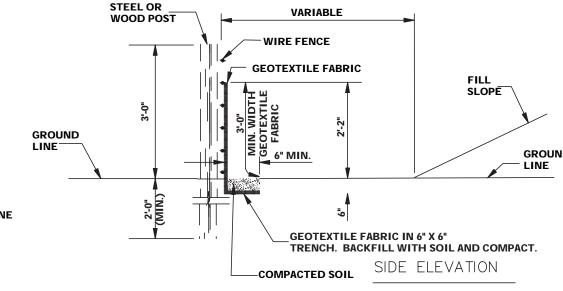

I TEMPORARY SILT FENCING

RIP RAP WHERE

SPECIFIED OR AS

DESIGNATED BY

THE ENGINEER.


NOTE: I.) ALL DISTURBED AREAS TO BE SEEDED OR SODDED 2.) SIDE SLOPES OF DETENTION POND TO BE SODDED

3,) SOLID SOD TO BE ADDED 3' BEHIND THE BACK OF CURB FOR THE ENTIRE LENGTH OF ROADWAY

4.) CONTRACTOR RESPONSIBLE FOR KEEPING STREETS CLEAN FROM ANY ACCIDENTAL TRACKING OF DIRT OR SEDIMENT

FALL OF DITCH DISTANCE 0 - 1 100' 1 - 2

25' >2 MIN. DISTANCES FOR EROSION CHECKS

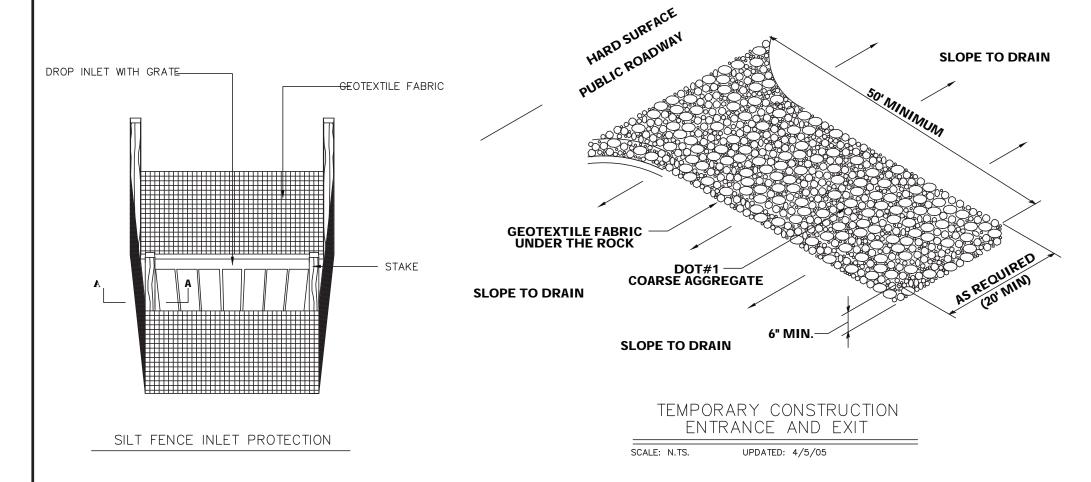

GENERAL NOTES:

(B.) DETENTION POND TO BE CONSTRUCTED

1. EROSION CONTROL SEQUENCE SHALL BE AS FOLLOWS: (A.) SILT FENCING TO PROTECT EXISTING WETLANDS SHALL BE INSTALLED

(C.) SILT FENCING AND HAY BALES TO BE INSTALLED AROUND ALL DRAINAGE STRUCTURES (D.) APPROPRIATE EROSION CONTROL STEPS TAKEN TO STABILIZE SIDE SLOPES AND SWALES (E.) ALL DISTURBED AREAS TO BE GRASSED EXCEPT WHERE SODDING IS REQUIRED

2. CONTRACTOR SHALL BE RESPONSIBLE FOR THE IMPLEMENTATION OF ALL EROSION CONTROL MEASURES IN ACCORDANCE TO THE WETLANDS PERMIT NUMBER- SAM-2011-1271-TMC , AND THE D.E.Q. (SWPP) PERMIT NUMBER----- "SEE CONTRACT DOCUMENTS FOR COPIES OF PERMITS"

3. CONTRACTOR SHALL INSPECT THE INSTALLED EROSION CONTROL ITEMS AT LEAST ONCE EVERY SEVEN-CALENDAR DAYS AND PROVIDE ANY MAINTENANCE REQUIRED TO PREVENT EROSION AND ADVERSE IMPACTS TO RECEIVING STREAMS 4. ENTIRE SITE SHALL BE CLEARED AND GRUBBED UNLESS OTHERWISE NOTED, HOWEVER

SPECIAL CARE SHOULD BE TAKEN TO PROTECT ANY ORNAMENTAL TREES THAT COULD REMAIN WITH-IN THIS PROJECT.


SILT FENCE NOTES:

1. WIRE SHALL BE MINIMUM OF 32" IN WIDTH AND SHALL HAVE A MINIMUM OF 6 LINE WIRES WITH 12" STAY SPACING.

2. GEOTEXTILE FABRIC SHALL BE A MINIMUM OF 36" IN WIDTH AND SHALL BE FASTENED ADEQUATELY TO THE WIRE AS DIRECTED BY THE ENGINEER.

3. STEEL POST SHALL BE 5'-0" IN HEIGHT AND OF THE SELF-FASTENER ANGLE STEEL TYPE WOOD POST SHALL BE A MINIMUM OF 5'-0" IN HEIGHT AND 3" OR MORE IN DIAMETER. WIRE FENCE SHALL BE FASTENED TO WOODEN POST WITH NOT LESS THAN 9 GAGE


4. GEOTEXTILE FABRIC MEETING THE TYPE II MATERIAL REQUIREMENTS AND INSTALLED ACCORDING TO SPECIFICATIONS MAY BE USED WITHOUT WIRE FENCE

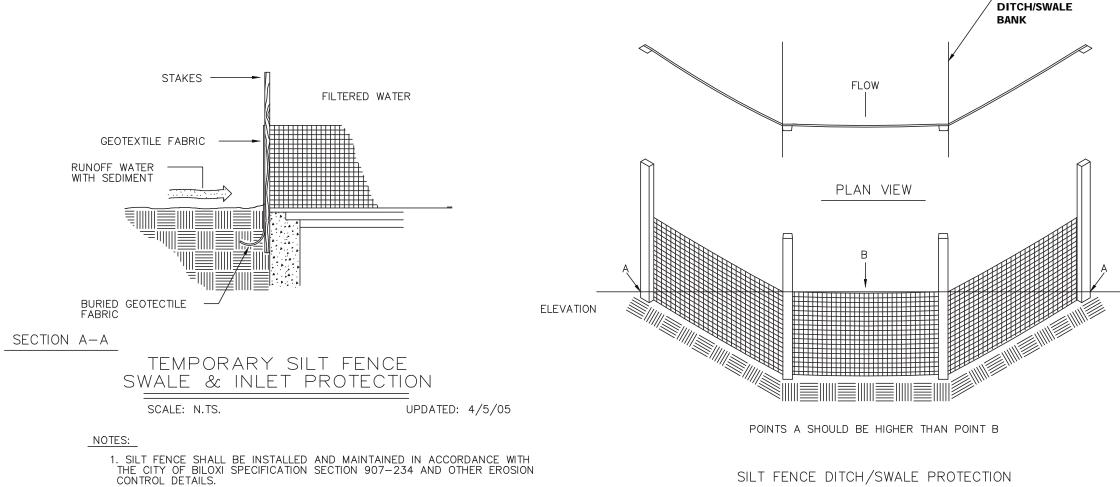









1"=100'


PROJECT NO. 860


SHEET


Inc.


Stieffel and Associates, ing Engineers

Dennis Si Consultine

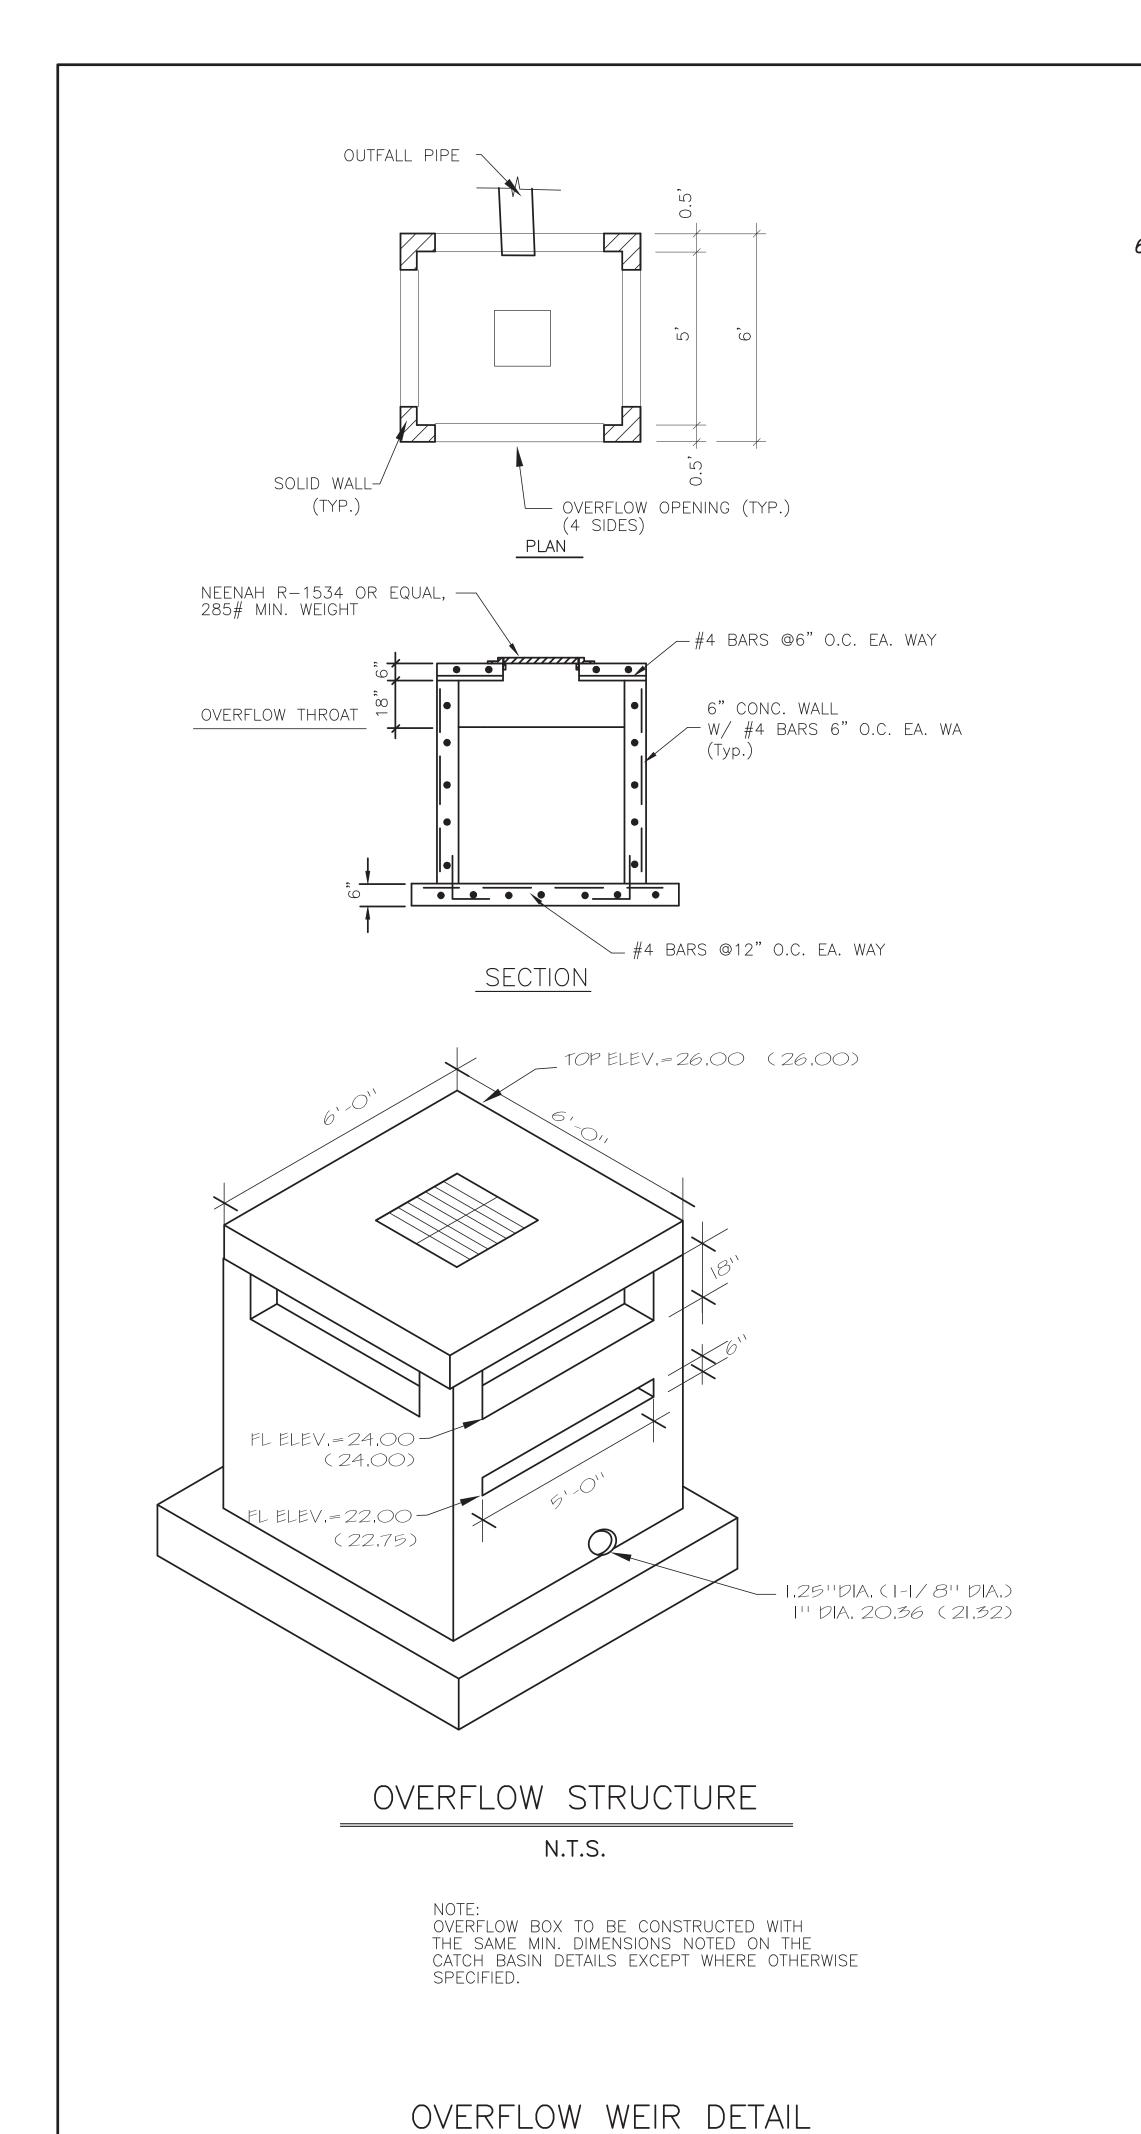

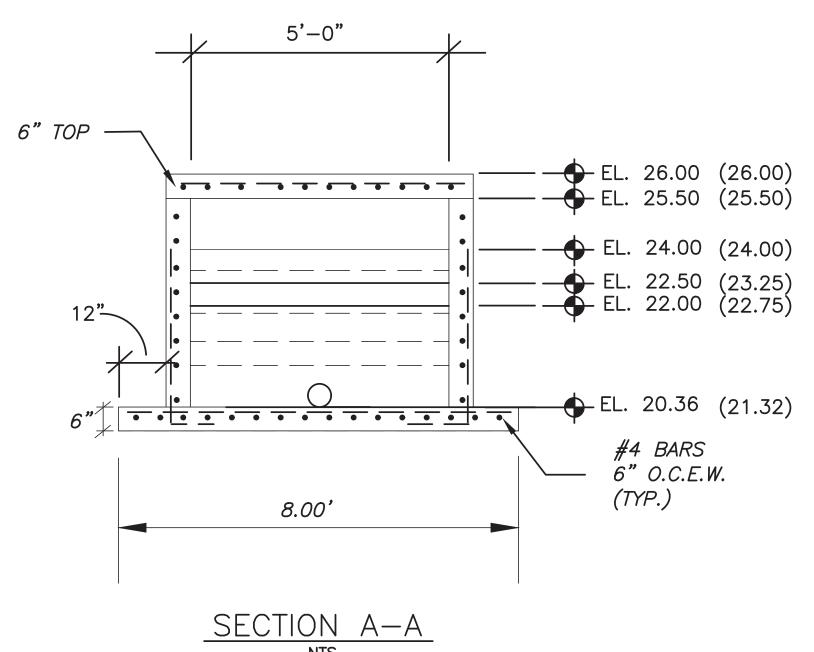

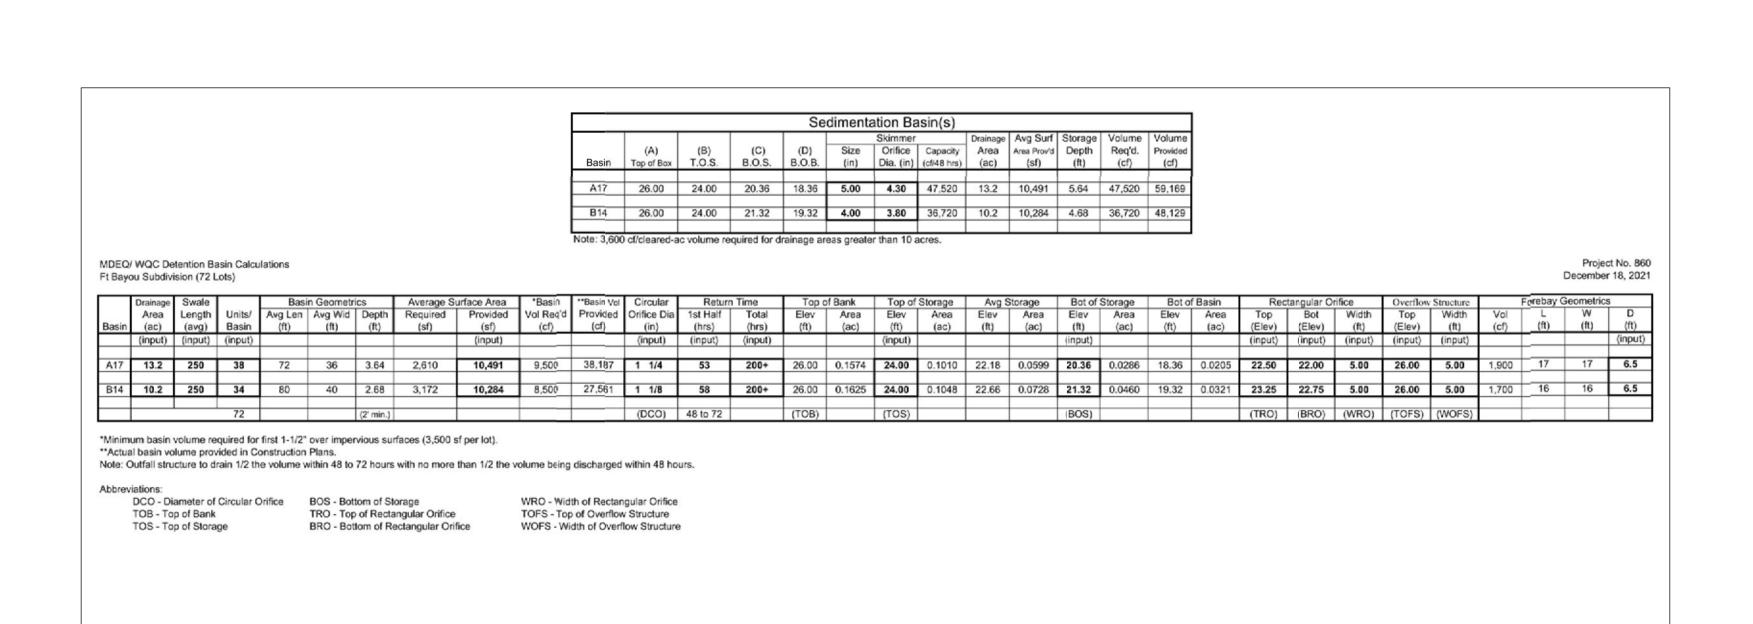

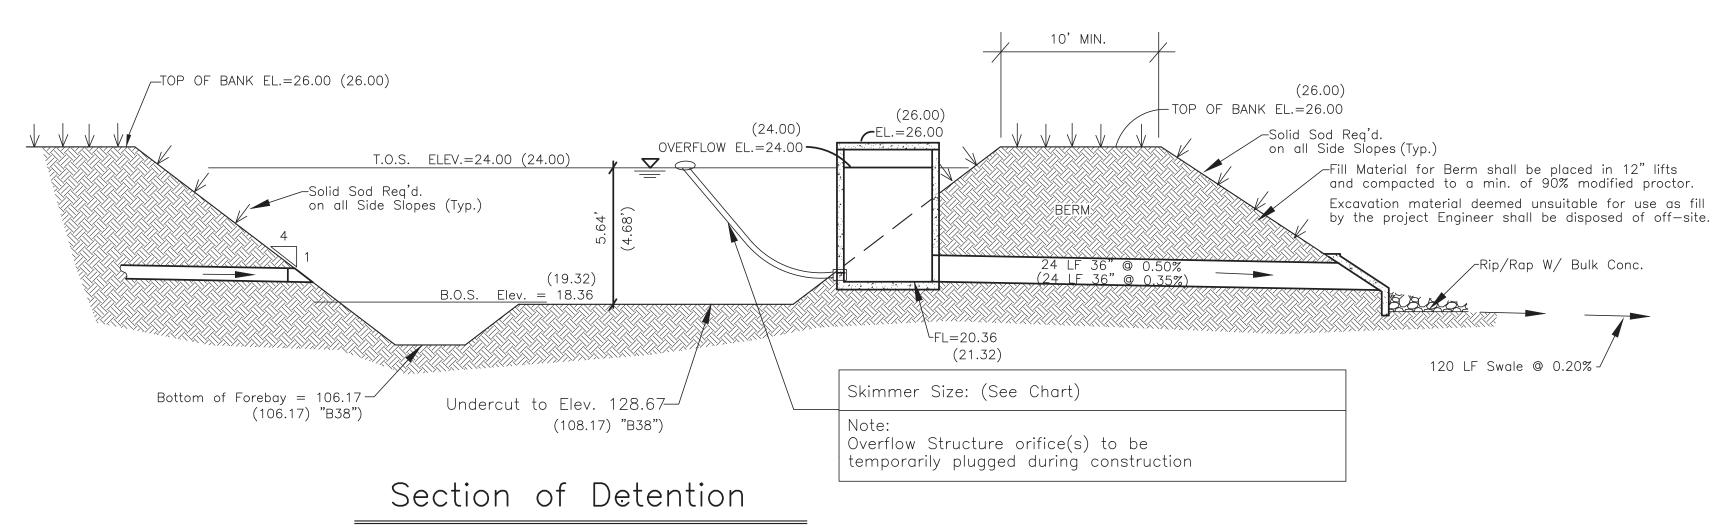

N.T.S.

1"=100'

Osprey

Associates, Stieffel and / **Dennis S**Consulting

SHEET

PROJECT NO. 860