

**LARGE CONSTRUCTION STORMWATER
POLLUTION PREVENTION PLAN**

Prepared For:

SOUTH RUNWAY EXTENSION

GEORGE M. BRYAN FIELD
STARKVILLE, MISSISSIPPI

Prepared By:

CLEARWATER CONSULTANTS, INC.
Environmental Engineers
Starkville, Mississippi

May 2025
Revised October 2025



MAJOR MODIFICATION FORM FOR LARGE CONSTRUCTION GENERAL PERMIT

Coverage No. MSR10 9248 County Oktibbeha

INSTRUCTIONS

Coverage recipients shall notify the Mississippi Department of Environmental Quality (MDEQ) at least 30 days in advance of the following activities (check all that apply). This form should be submitted with a modified Storm Water Pollution Prevention Plan (SWPPP), updated USGS topographic map, Corps of Engineers Section 404 documentation and wastewater collection and treatment information, as appropriate.

☐ SWPPP details have been developed and are being submitted for MDEQ review for subsequent phases of an existing project.

☒ "Footprint" identified in the original LCNOI is proposed to be changed.

This form must be signed by the current coverage recipient under Mississippi's Large Construction General Permit. A different developer of new phases of existing subdivisions must apply for separate permit coverage through the submittal of a new complete LCNOI package. Coverage recipients are authorized to discharge storm water associated with proposed expansions of existing subdivisions or subsequent phases, under the conditions of the General Permit, only upon receipt of written notification of approval by MDEQ. All other modifications, such as changes of erosion and sediment controls used, must be in accordance with ACT6, S-1 (6) and S-2 (7) of the General Permit.

ALL INFORMATION MUST BE COMPLETED (indicate "N/A" where not applicable)

CURRENT COVERAGE RECIPIENT INFORMATION

COVERAGE RECIPIENT CONTACT NAME: Mr. Rodney Lincoln PHONE # (662) 418-5900
 COMPANY NAME: George M. Bryan Field
 STREET OR P.O. BOX: 120 Airport Road
 CITY: Starkville STATE: MS ZIP: 39750 E-MAIL: rlincoln@cityofstarkville.com
 IS THE APPLICANT DIFFERENT FROM THE CURRENT COVERAGE HOLDER? YES ☒ NO

PREPARER/CONSULTANT INFORMATION (Complete if prepared by someone other than applicant.)

PREPARER/CONSULTANT CONTACT NAME: Lee Kirkpatrick PHONE # (662) 323-8000
 COMPANY NAME: Clearwater Consultants, Inc.
 STREET OR P.O. BOX: Post Office Box 1328
 CITY: Starkville STATE: Ms ZIP: 39760 E-MAIL: tlk@clearwaterconsultants.com
 MAY MDEQ CORRESPOND DIRECTLY WITH THE PREPARER / CONSULTANT REGARDING THE PROPOSED PROJECT / MODIFICATION? ☒ YES NO

SITE INFORMATION

PROJECT NAME: South Runway Extension
 CITY: Starkville, Mississippi TRIBAL LAND ID (N/A If not applicable): N/A33
Latitude / Longitude Collected at Project Entrance or Construction Start Point:
 LATITUDE: 33 degrees 25 minutes 19 seconds LONGITUDE: 88 degrees 50 minutes 57 seconds
 LAT & LONG COLLECTION METHOD (e.g., GPS, Map Interpolation): Google Earth
 REDUCTION IN ACREAGE: _____ ADDITIONAL ACREAGE TO BE DISTURBED: 17
 TOTAL PROJECT ACREAGE: 83 ESTIMATED CONSTRUCTION END DATE: August 2026

IS THE PROJECT REROUTING, FILLING OR CROSSING A WATER CONVEYANCE OF ANY KIND? (If yes, contact the U.S. Army Corps of Engineers' Regulatory Branch for permitting requirements.) ☐ YES ☒ NO

IF THE PROJECT IS A SUBDIVISION OR A COMMERCIAL DEVELOPMENT, HOW WILL SANITARY SEWAGE BE DISPOSED? Check one of the following and attach the pertinent documents.

- ☐ Existing Municipal or Commercial System. Please attach plans and specifications for the collection system and the associated "Information Regarding Proposed Wastewater Projects" form or approval from County Utility Authority in Hancock, Harrison, Jackson, Pearl River and Stone Counties. If the plans and specifications cannot be provided at the time of LCNOI submittal, MDEQ will accept written acknowledgement from official(s) responsible for wastewater collection and treatment that the flows generated from the proposed project can and will be transported and treated properly. The letter must include the estimated flow.
- ☐ Collection and Treatment System will be Constructed. Please attach a copy of the cover of the NPDES discharge permit from MDEQ or indicate the date the application was submitted to MDEQ (Date: _____.)
- ☐ Individual Onsite Wastewater Disposal Systems for Subdivisions Less than 35 Lots. Please attach a copy of the Letter of General Acceptance from the Mississippi State Department of Health or certification from a registered professional engineer that the platted lots should support individual onsite wastewater disposal systems.
- ☐ Individual Onsite Wastewater Disposal Systems for Subdivisions Greater than 35 Lots. A determination of the feasibility of installing a central sewage collection and treatment system must be made by MDEQ. A copy of the response from MDEQ concerning the feasibility study must be attached. If a central collection and wastewater system is not feasible, then please attach a copy of the Letter of General Acceptance from the State Department of Health or certification from a registered professional engineer that the platted lots should support individual onsite wastewater disposal systems.

INDICATE ANY LOCAL STORM WATER ORDINANCE WITH WHICH THE PROJECT MUST COMPLY:

NEAREST NAMED RECEIVING STREAM: Tobacco Juice Creek

IS RECEIVING STREAM ON MISSISSIPPI'S 303(d) LIST OF IMPAIRED WATER BODIES? (The 303(d) list of impaired waters and TMDL stream segments may be found on MDEQ's web site: <https://www.mdeq.ms.gov/water/surface-water/tmdl/>) ☒ YES ☐ NO

HAS A TMDL BEEN ESTABLISHED FOR THE RECEIVING STREAM SEGMENT? ☐ YES ☒ NO

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Rodney Lincoln
Signature (must be signed by coverage recipient)

Rodney Lincoln
Printed Name

10-28-2025
Date

Airport Director
Title

Please submit this form to: Chief, Environmental Permits Division
Office of Pollution Control
MS Department of Environmental Quality
P.O. Box 2261
Jackson, Mississippi 39225

Electronically: <https://www.mdeq.ms.gov/construction-stormwater/>

TABLE OF CONTENTS

Table of Contents	i
List of Figures	ii
1. Introduction	1
SWPPP Certification	2
Site Evaluation	3
TMDLs for Sedimentation	5
Sedimentation Basin Restrictions.....	6
Wetlands	11
Allowable Non-Stormwater Discharges	11
Prohibited Non-Stormwater Discharges	12
2. Temporary Erosion and Sediment Control Plan	13
Structural Practices	13
Vegetative Controls	15
Good Housekeeping Practices	15
3. Permanent Erosion Control Plan	17
Structural.....	17
Vegetative.....	17
4. Staff Training Requirements.....	17
Staff Training Documentation	18
5. Implementation and Inspections	19
Implementation	19
Implementation Sequence	19
Inspections	19
Inspection Frequency.....	19
Maintenance.....	20
6. Termination of Permit Coverage	21
7. Reporting and Plan Amendment	21
Inspection Reports	21
Non-Compliance Reports	21
Plan Amendment	21

APPENDIX

Large Construction General Stormwater Permit
Large Construction Forms Package
Structural Controls General Details
USGS Soils Report Information for Oktibbeha County, Mississippi
Site Inspection Photographs

LIST OF FIGURES

Figure 1 Location Map 8

Figure 2 Site Plan 9

Figure 3 Overall Project Layout 10

Figure 4 Structural Controls 22

1. INTRODUCTION

This Stormwater Pollution Prevention Plan (SWPPP) has been developed for the proposed earthwork activities required for a runway and taxi-way extension on George M. Bryan Field located at 120 Airport Road in Starkville, Mississippi. This plan will describe both temporary and permanent requirements for control of erosion and sediment transport from the site. These efforts will meet the regulatory requirements established in the Large Construction General Stormwater Permit. The specified controls will be designed, installed, and maintained to:

1. Control Stormwater volume and velocity within the site to minimize erosion
2. Control stormwater discharges, including both peak flow rates and total stormwater volume, to minimize erosion at outlets and to minimize downstream channel and stream bank erosion
3. Minimize the amount of soil exposed during construction activity
4. Minimize the disturbance of steep slopes
5. Minimize sediment discharge from the site
6. Provide and maintain natural buffers around surface waters, direct stormwater to vegetated areas to increase sediment removal and maximize stormwater infiltration
7. Minimize soil compaction and unless infeasible, preserve topsoil
8. Direct stormwater to vegetated areas, brush barriers, silt fences, check dam etc.
9. Transport runoff down steep slopes through lined channels and piping
10. Minimize the amount of cut and fill and topsoil compaction
11. Minimize off-site tracking of sediments

A copy of the permit and Certificate of Coverage been included in the Appendix of this plan for reference.

Stormwater Pollution Prevention Plan Certification

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Rodney Lincoln
Signature

Rodney Lincoln
Printed Name

10-28-2025
Date

Airport Director
Title

General

SWPPP Revisions October 22, 2025

This Large Construction Stormwater Prevention Pollution Plan (SWPPP) was originally submitted for review to the Mississippi Department of Environmental Quality (MDEQ) on July 15, 2025. The SWPPP was approved and a Certificate of Permit Coverage Number MSR109248 was issued on August 19, 2025 with an expiration date of January 31, 2027. After the issuance of the Large Construction Permit Coverage, the decision was made to incorporate an additional 17-acre portion of the City of Starkville Airport property to the disturbed area of the construction site. The required revisions to the SWPPP to incorporate the additional area are contained herein. These revisions only address the sections and figures of the SWPPP which were affected by the 17- acres of additional area added to the project site. There are no other revisions to the original plan which was previously approved. All revisions to the original plan are highlighted for the reviewer's convenience. The portions of the original plan which are not highlighted remain unchanged.

Site Evaluation

The proposed construction activities for the runway and adjoining taxiway extension are located at 120 Airport Road in Starkville, Mississippi. A location map presented in Figure 1 shows the location of the site in relation to the surrounding area and provides regional topographical information. The site plan presented in Figure 2 provides the proposed finished topography of the site including the runway / taxiway, construction areas, drainage features and recommended structural controls. An overall site plan is presented in Figure 3 which provides complete coverage of the entire construction site.

The work involved in this project consists of:

1. Installation of stormwater erosion controls.
2. Install stormwater piping with precast flared end sections.
3. Excavation and processing of onsite (common) borrow material to bring the runway subbase up to the required grade.
4. Import additional offsite (common) borrow material as required to complete subbase construction.
5. Import select borrow material onto the site to provide 24 inches of select backfill directly under the runway
6. Provide soil cement in the upper 12 inches of select material.

7. Finish grading all disturbed areas on the site and install permanent erosion control measures.

A single construction entrance will be provided to the site, off of Highway 25 North on the west side of the construction site. There will be no material which is hauled offsite. The construction entrance will be strictly used to bring material into the construction area.

As shown by the topography presented in the Site Map in Figure 1 the project site is located in a very low, flat area with minimal relief to the south – southwest. Other than the airport, the primary land use of the construction site and surrounding areas has been agricultural in the form of row crops and pasture.

The USGS Soils Report for Oktibbeha County was referenced to evaluate the soil type and characteristics within the project site. The soils map which covers the Starkville Municipal Airport was obtained and is presented in the Appendix. The only soil type shown within the project site and surrounding areas is the Sessums Series. The soils in the Sessums series are formed in beds of clay over thick beds of calcareous chalk or marly clay. The soil is located on upland flats and is poorly drained with flat slopes ranging from 0 to 2 percent. The erosion hazard (potential) of the soil is listed as slight which is the lowest potential erosion ranking.

The land use in the proposed project area with the exception of the runway safety zone has been row crop farming. No erosion/sedimentation issues have been observed at any time within the disturbed areas of the agricultural fields or borders. A clearing and grubbing project has recently been completed on the southern portion of the proposed construction site under a separate stormwater permit to remove trees in preparation for the upcoming runway extension project.

A site inspection was conducted on May 6, 2025 to observe the borders of the cultivated areas and the areas which have been cleared. The inspection was conducted after heavy spring rains and multiple rainfall events which occurred during the preceding week. The results of the inspection did not reveal any evidence of erosion within these areas or along the borders. Pictures taken during the inspection are provided in the Appendix.

As shown in the Site Map presented in Figure 2 the proposed project will construct a swale which collects stormwater from areas on the east side of the runway centerline. The disturbed area of the project which will drain into this swale is 50 acres. The remaining disturbed areas which contain

approximately 16 acres on the west side of the runway centerline will flow overland in a west / southwesterly direction into an existing drainage feature. Both drainage features described above flow into an unnamed tributary approximately 0.25 miles upstream of its confluence with Tobacco Juice Creek which is part of the Hollis Creek / Noxubee River watershed. The Overall Project Layout presented in Figure 3 shows a wider view of the project beyond the construction limits including the access road and the contractor laydown area.

An additional 17-acre portion of the construction site on the west side of the Airport property as shown in Figure 2 will be used to harvest onsite soil as common borrow material for construction of the runway extension subbase. The drainage from this area will flow overland in a southwesterly direction into the same unnamed tributary where it will travel 0.25 miles to the confluence with Tobacco Juice Creek.

TMDLs for Sedimentation

TMDLs for sedimentation have been issued for Hollis Creek (2010) and the Noxubee River (2007) that are included in the drainage basin which serves the construction site. Stormwater leaving the construction site flows approximately 0.25 miles through an unnamed tributary to Tobacco Juice Creek. Tobacco Juice Creek flows 5.4 miles to the confluence with Talking Warrior Creek. Talking Warrior Creek flows 3.1 miles to the confluence with Hollis Creek which is 8.3 miles from the construction site. The distance from Hollis Creek to the confluence with the Noxubee River is approximately 0.49 miles. (Distances are straight line distance rather than actual stream distances).

The physical characteristics of the site provide natural protection from soil erosion and sediment transport which when combined with the selected BMPs will minimize the possibility of the sediment reaching the Hollis Creek / Noxubee River watershed.

- Topography / Erosion Resistant Soil – As documented, the natural topography of the site is flat with minimal slope to the southwest. The soil on the construction site consists of thick beds of calcareous chalk over marly clay with an erosion potential of slight. The minimal slope of the site and surrounding areas along with the erosion resistant native soils will minimize the potential of soil erosion and sediment transport.

- The constructed drainage features (swales) included as part of this project are designed with minimal slopes. The centerline slope of all drainage features is 0.5 percent with side slopes of 30H:1V on the major drainage swale and 5H:1V on the taxiways and runway safety areas.
- The original slope of the 17-acre borrow area is 50H:1V. The finished graded slope of the borrow area will be 80H:1V.
- The velocities produced by the peak design stormwater flows are well below velocities required to suspend and transport sediment from the site during a peak design stormwater storm event (SCS Type II 24-HR 10 year).

The following temporary BMPs will be installed and maintained during construction until establishment of a permanent vegetative cover to ensure sediment is retained onsite preventing entry into the Hollis Creek / Noxubee River watershed.

- Silt Fence – As shown in Figure 2, a silt fence will be provided and maintained around the southwest corner of the construction area where the stormwater leaves the site.
- Silt fence will be provided and maintained along the south and west borders of the 17-acre borrow area
- Straw Wattles – Straw wattles will be provided and installed along the side slopes should any erosion be observed during inspections.
- Inlet protection - A combination of straw bales and wattles will be installed around stormwater inlets to retain sediment upstream of the inlet.

Sedimentation Basin Restrictions

Act 5 Section T6 of the Large Construction General permit requires for drainage locations (a drainage point at a boundary of land disturbing activity) that serves an area of 10 or more disturbed acres at one time, a temporary or permanent sedimentation basin(s) providing at least 3,600 cubic feet of storage per acre drained shall be provided until final stabilization of the site.

There are two conditions which prohibit the construction and use of a temporary sedimentation basin on the project site which are discussed as follows:

1. FAA Regulations - The project involves an extension of the south end of the runway at George M. Bryan Field in Starkville, Mississippi. The runway will be open during all phases of construction. FAA regulations prevent the presence of any ponded water within


the vicinity of an active runway which could attract waterfowl. The presence of waterfowl would pose a hazard to incoming and outgoing air traffic utilizing the runway.

2. Site Topography Limitations – As mentioned previously the construction site is extremely flat with minimal elevation relief across the construction area and between the construction area and the existing drainage features. The use of a sedimentation basin to store the required volume of water with level control provided by a discharge weir would either back water into the construction area prohibiting construction of the project, or require pumping to remove retained volume due to the flow line of the receiving stream.

In lieu of a conventional sedimentation basin, a silt fence containment area will be installed around each of the drainage features described previously and as shown in the Site Plan. Due to the extremely flat natural and constructed slopes within these areas along with the resistance to erosion of the native soils, sediment transport is expected to be minimal. The silt fence will act as a safeguard to contain any sediment transported to the perimeter of the drainage area. An inspection will be conducted after each rainfall event and any sediment collected will be addressed as accordance with the “Inspections and Maintenance” section of this plan. Once the project is completed the area upstream and adjacent to the silt fence will be graded and permanent erosion control measures installed for final stabilization of this area.

In summary the use of a silt fence combined with the site characteristics described above will provide sufficient erosion control measures to meet the intent of the Large Construction General Stormwater permit.

T:\acad\2025-dwg\Airport-George M Bryan\Stormwater Management 2025\Version 2\Fig-1 Stormwater Quad 102325.dwg, 10/23/2025 11:33:11 AM, 1:1

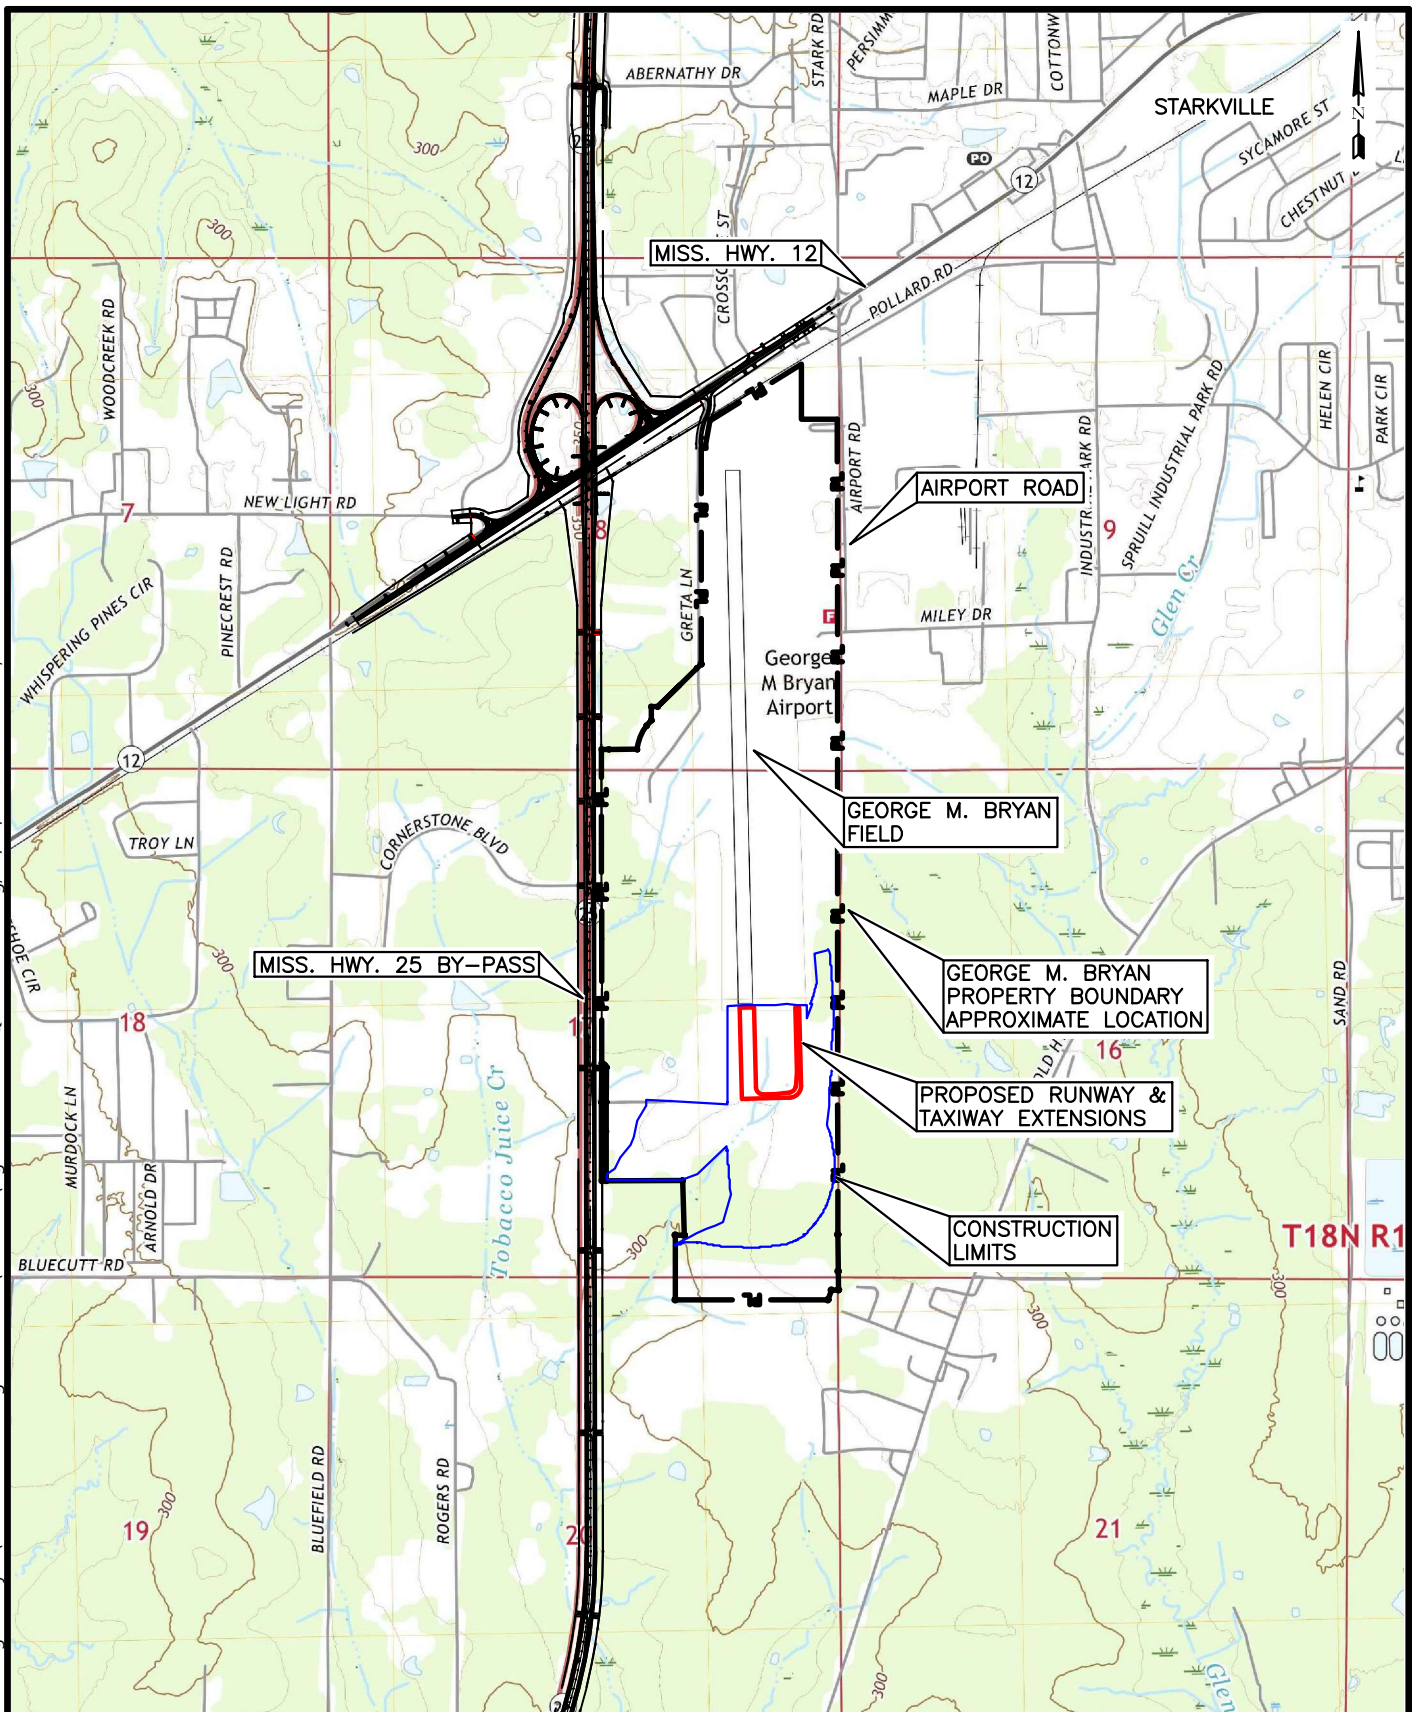

1000 0 1000 2000 3000 4000 5000 6000 7000 FEET

SOURCE: USGS 7.5 MIN. SERIES - STARKVILLE QUADRANGLE - OKTIBBEHA COUNTY, MISSISSIPPI


LOCATION MAP

FIGURE
1

CLEARWATER CONSULTANTS, INC.
STARKVILLE, MISSISSIPPI

CITY OF STARKVILLE
GEORGE M. BRYAN FIELD
STARKVILLE, MISSISSIPPI

POST CONSTRUCTION STORMWATER
MANAGEMENT PLAN
OCTOBER 2025

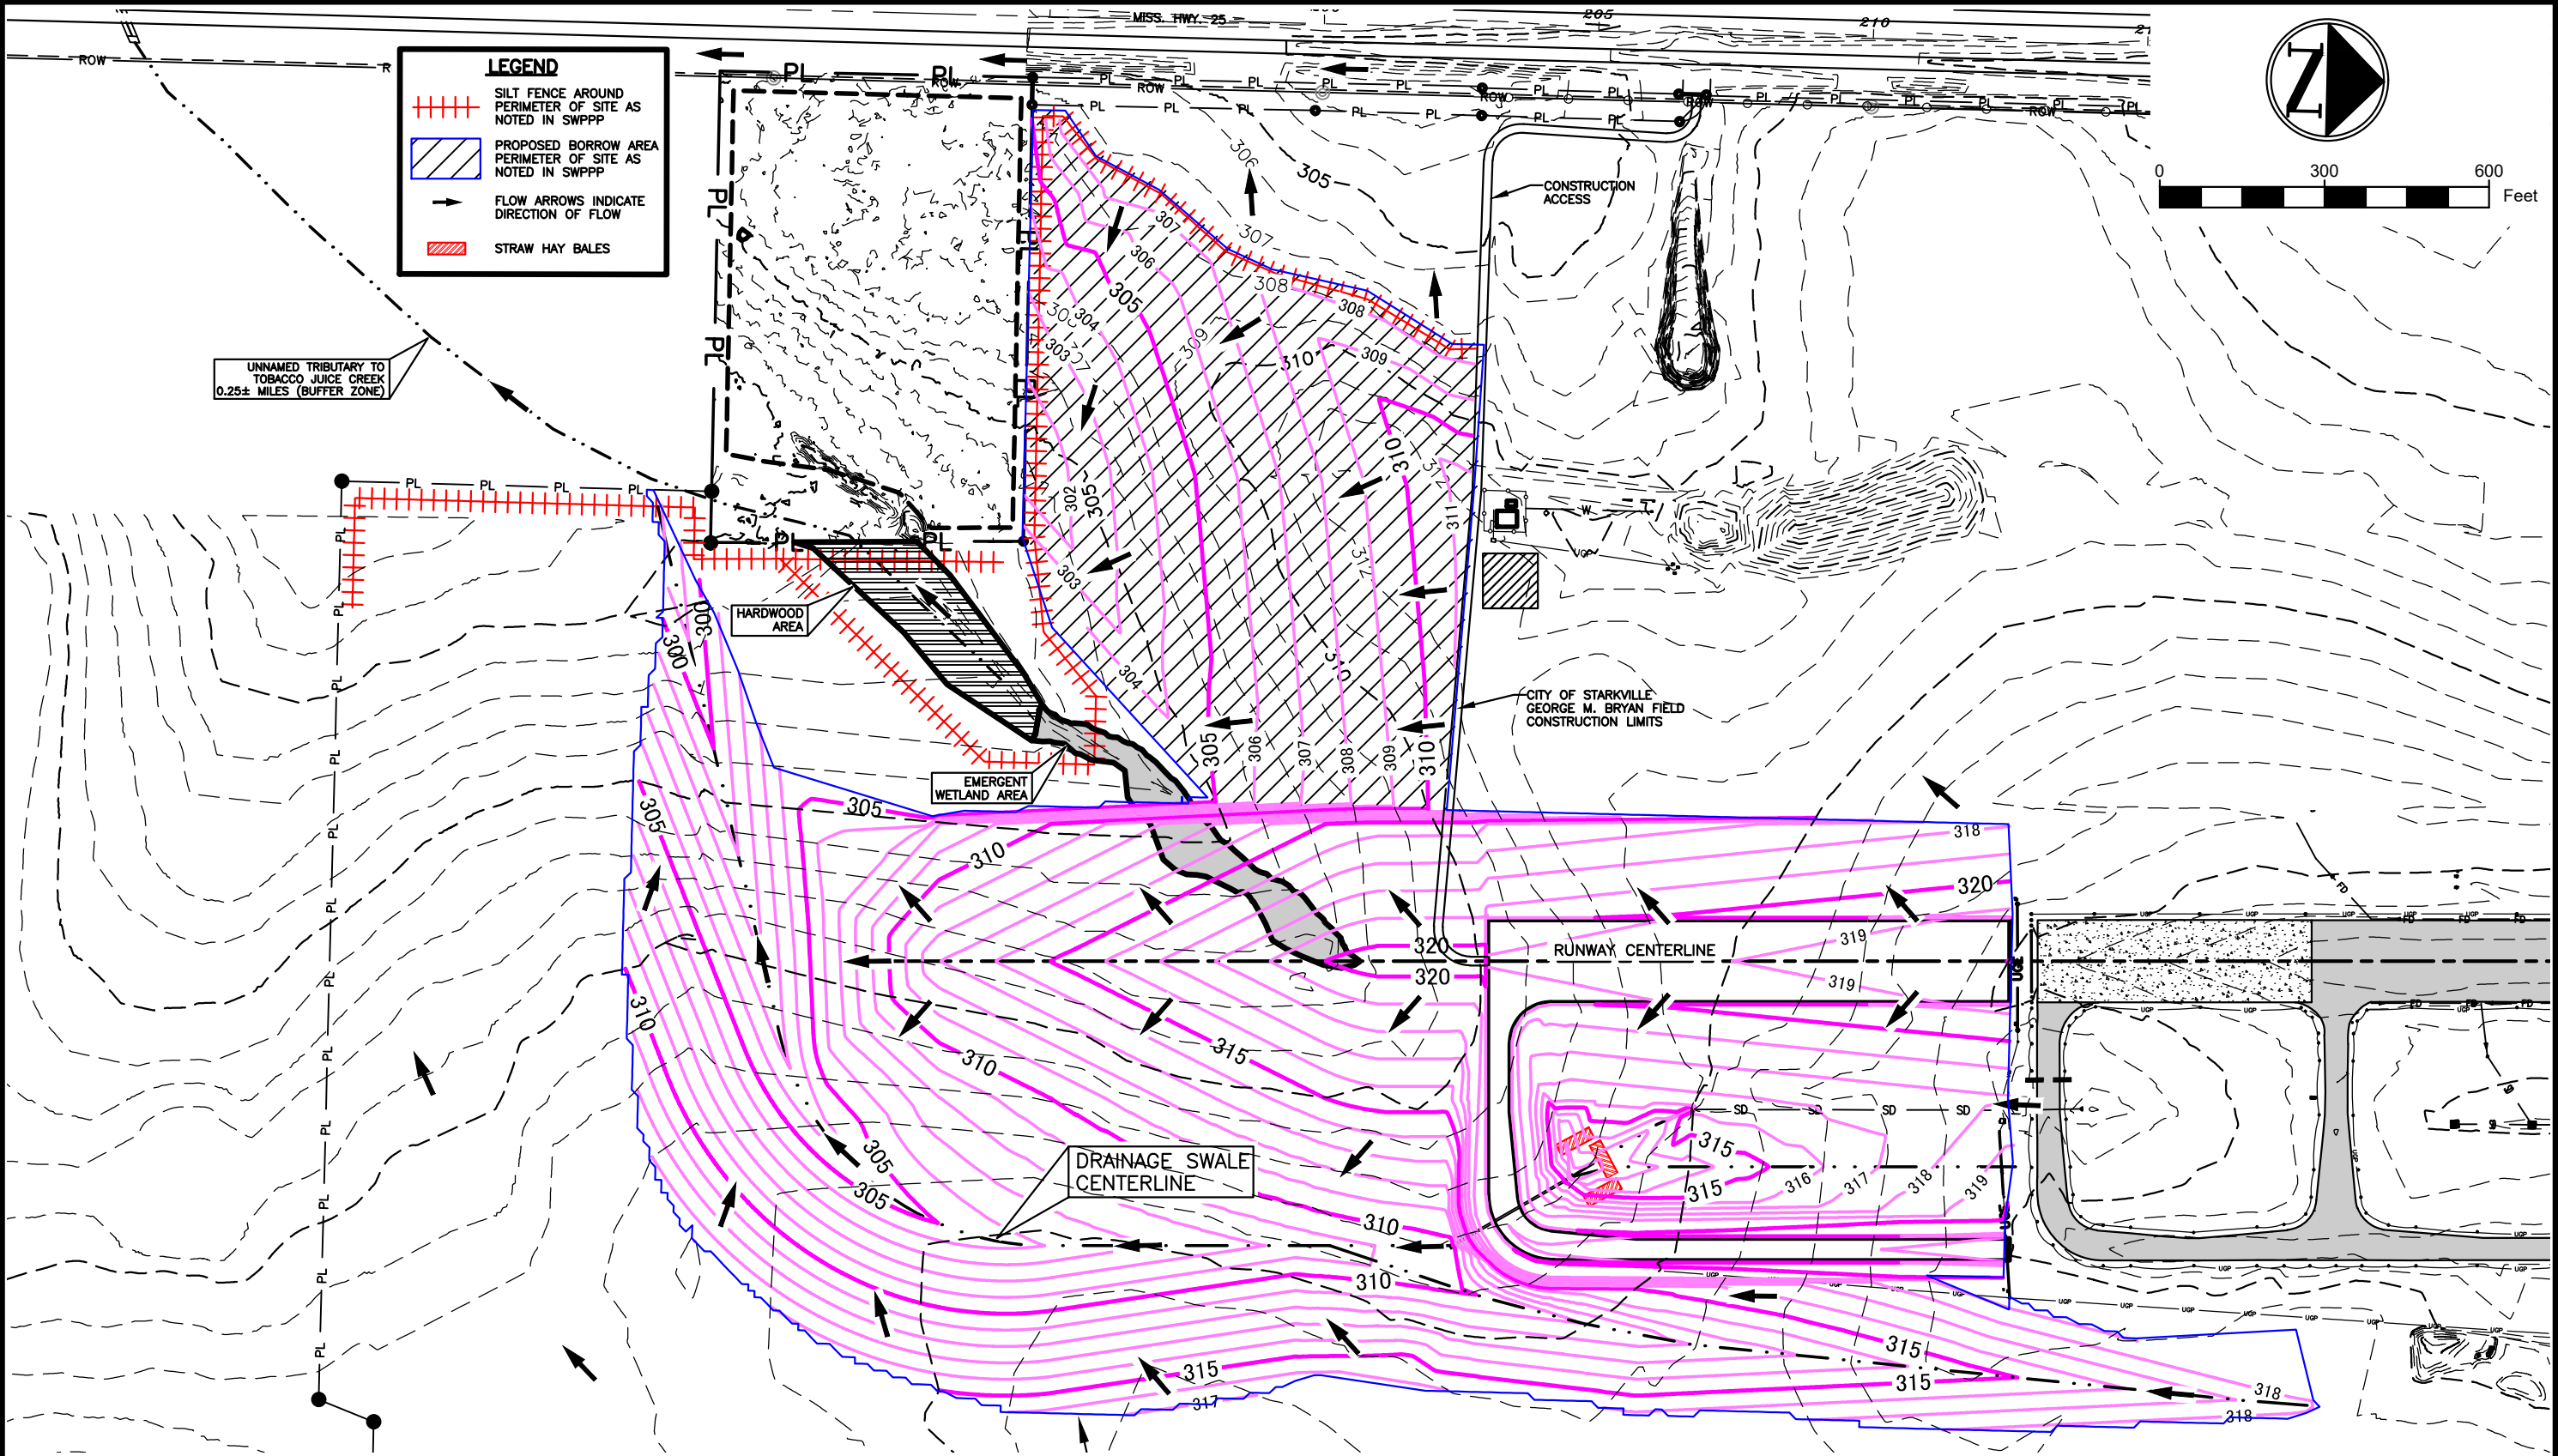


CLEARWATER CONSULTANTS, INC.
STARKVILLE, MISSISSIPPI

CITY OF STARKVILLE
GEORGE M. BRYAN FIELD
STARKVILLE, MISSISSIPPI

SCALE: AS NOTED
DATE: OCTOBER 2025

LARGE CONSTRUCTION STORMWATER
POLLUTION PREVENTION PLAN

FIGURE
2

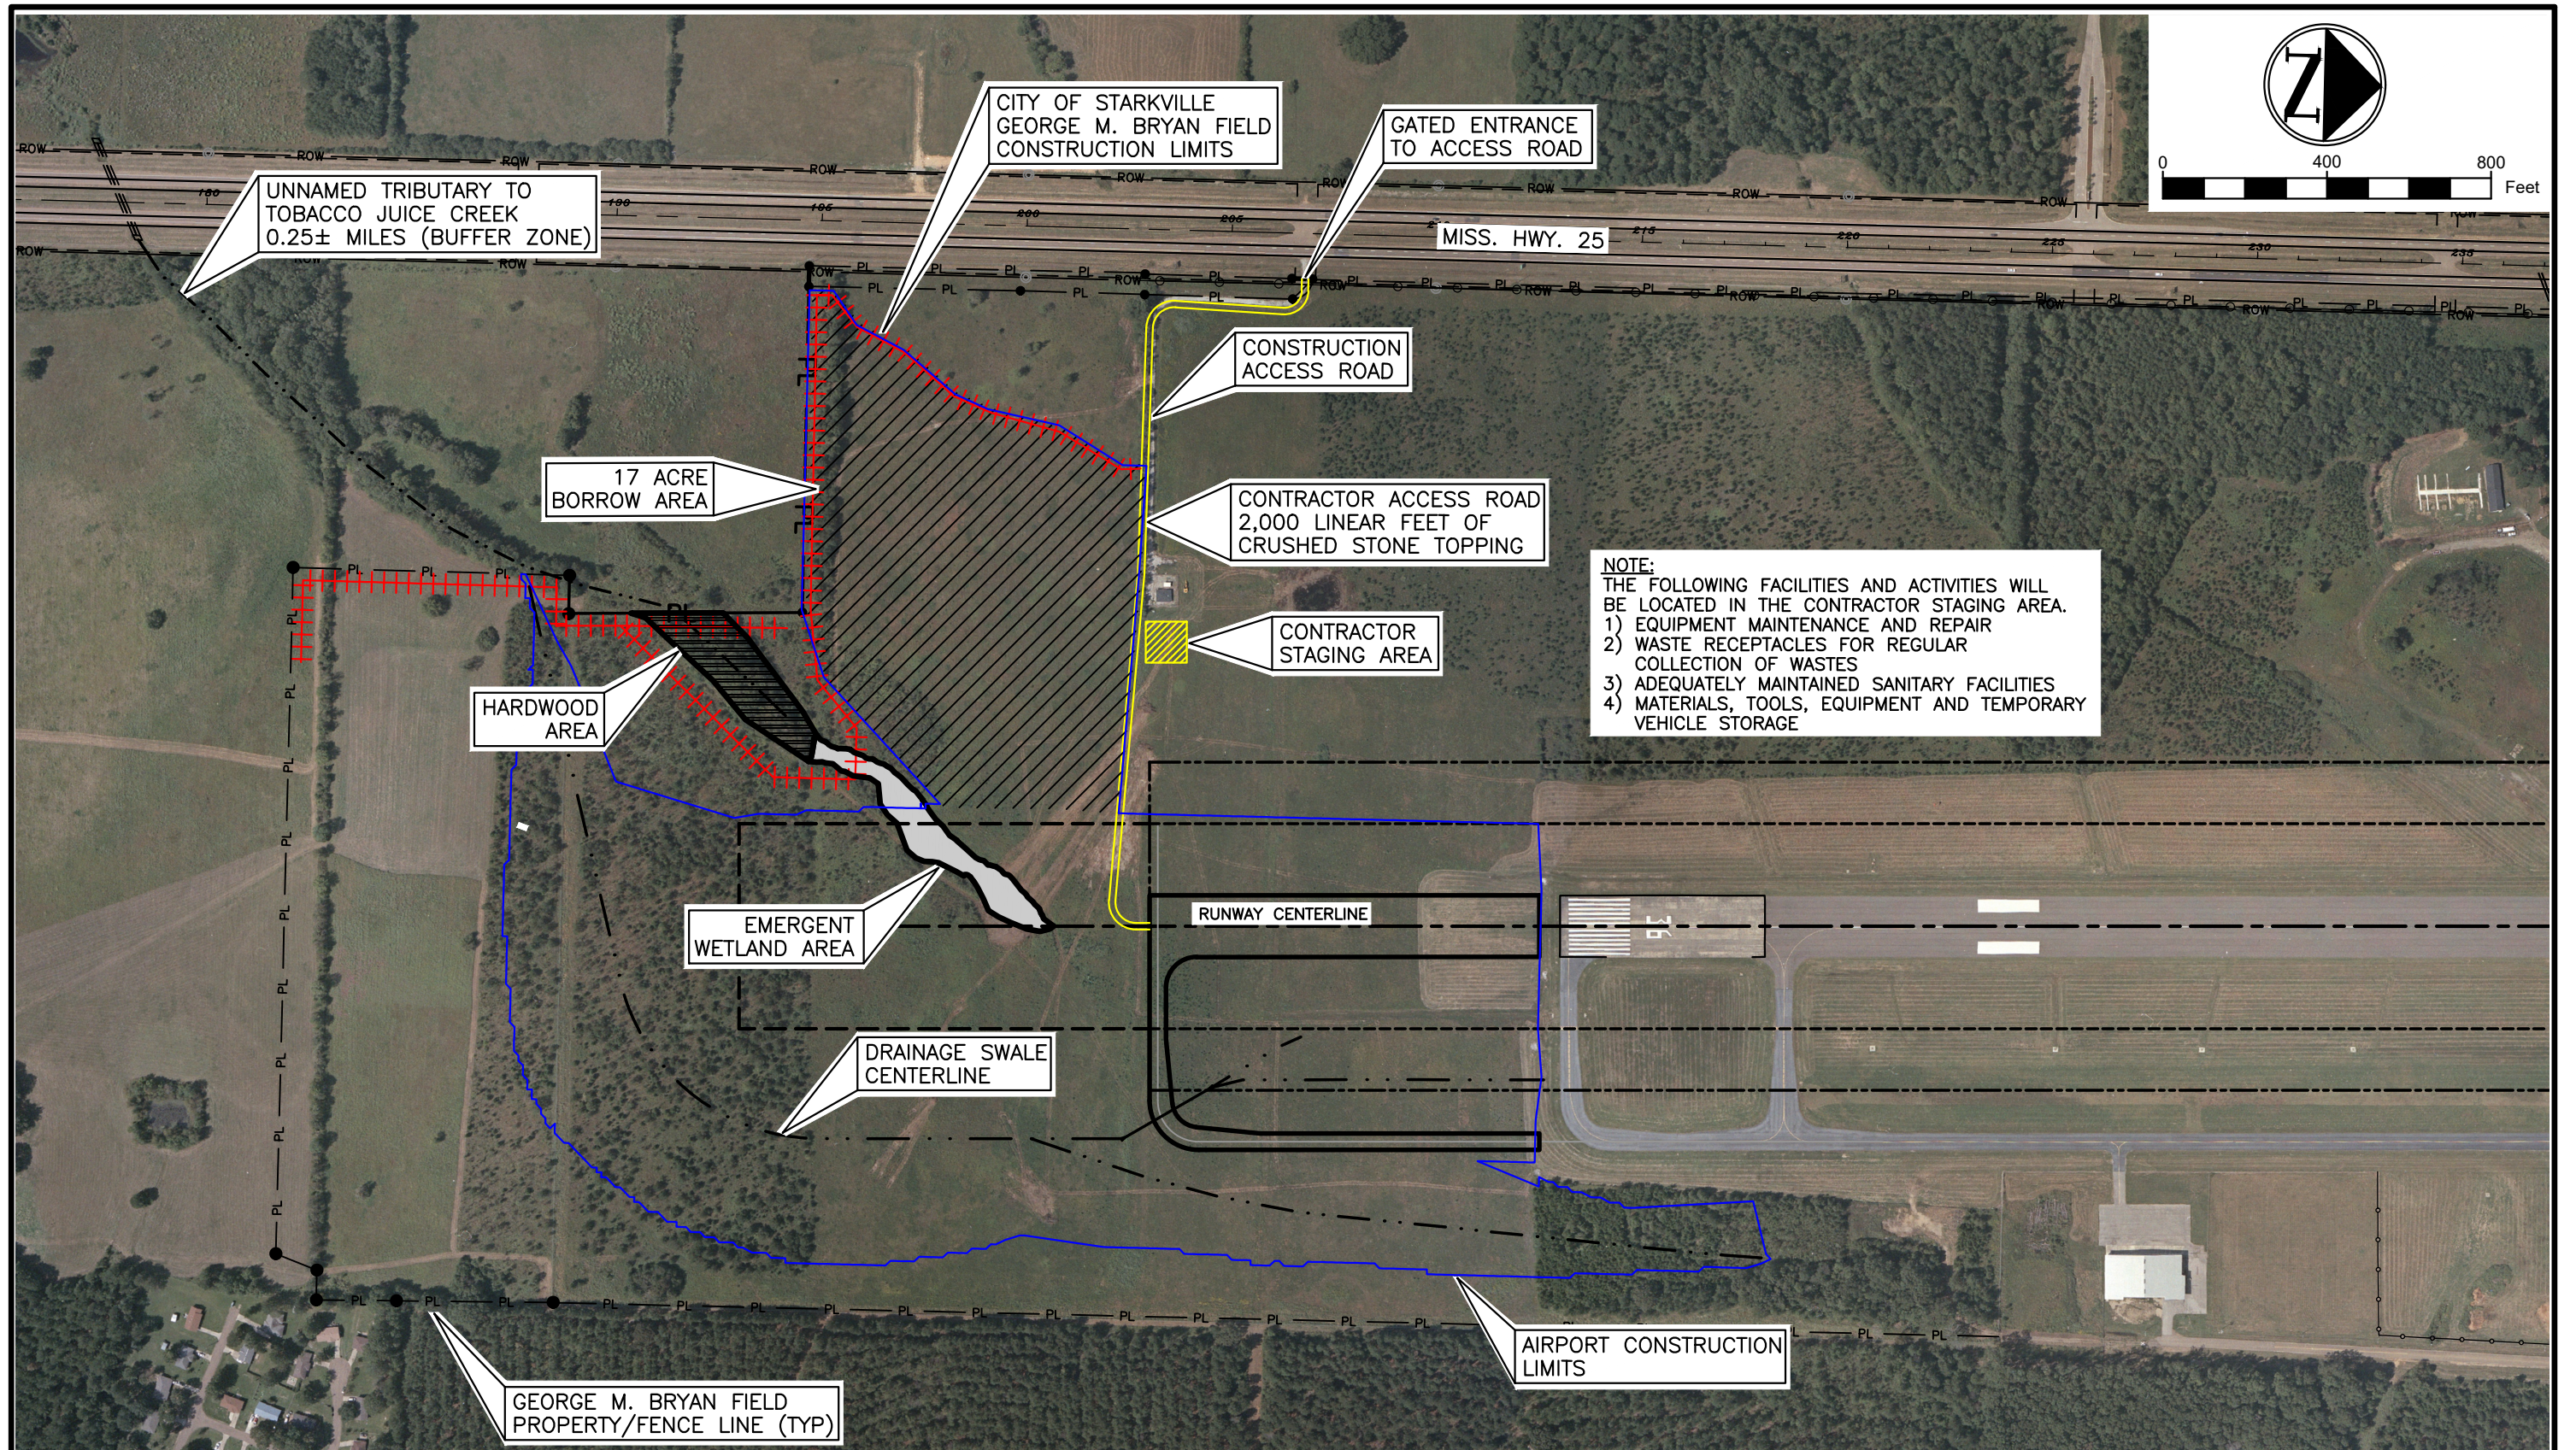

CLEARWATER CONSULTANTS, INC.
 STARKVILLE, MISSISSIPPI

CITY OF STARKVILLE
 GEORGE M. BRYAN FIELD
 STARKVILLE, MISSISSIPPI

SCALE: AS NOTED
 DATE: OCTOBER 2025

LARGE CONSTRUCTION STORMWATER
 POLLUTION PREVENTION PLAN
 OVERALL PROJECT LAYOUT

FIGURE
 3

Wetlands

The U.S. Army Corp of Engineers 404 Permit is currently under evaluation for 0.76 acres of proposed wetland impacts, the 404 Permit is pending MDEQ 401 water quality certification. The proposed 0.76 acres of wetland impacts will be mitigated as a condition of the 404 permit. Upon issuance the 404 permit will be included in the appendix of this SWPPP. The emergent wetland areas are shown in Figures 2 & 3. Two layers of silt fence are to be installed within the mitigated wetland area which will provide additional erosion retention as shown in Figure 2.

Allowable Non-Stormwater Discharges

The Large Construction Stormwater permit allows stormwater and allowable non-stormwater discharges from construction activities. The allowable non-stormwater discharges are listed as follows:

- Discharges from actual fire-fighting activities
- Fire hydrant flushing
- Water used to control dust
- Potable water sources including uncontaminated water line flushing
- Routine external building washdown that does not use detergents
- Pavement wash waters where spills or leaks of toxic or hazardous material have not occurred (unless all spilled material has been removed) and where detergents are not used
- Uncontaminated air conditioning or compressor condensate
- Uncontaminated ground water or spring water
- Foundation or footing drains where flows are not contaminated with process material such as solvents
- Landscape irrigation
- Water used to wash vehicles, wheel wash water and other wash waters where detergents are not used
- Construction dewatering water discharged in accordance with ACT 5 T-11. (Miss. Admin. Code Pt. 6, R.1)

All allowable non-stormwater discharges should be eliminated or reduced to the extent feasible. All non-stormwater wash waters must be treated in a sediment basin or alternate structural controls that provide equivalent treatment.

Prohibited Non-Stormwater Discharges

Non-stormwater discharges which are prohibited from being discharged on the project site are provided below:

- Wastewater from the washout of concrete (unless managed by an appropriate control)
- Wastewater from the washout and cleanout of stucco, paint, form release oils, curing compounds, and other construction materials
- Fuels, oils, or other pollutants used in vehicle and equipment operation and maintenance
- Soaps or solvents used in vehicle and equipment washing
- Wastewater from sanitary facilities, including portable toilets
- Contaminated discharge waters from dewatering activities
- Toxic or hazardous substances from a spill or other release

2. TEMPORARY EROSION AND SEDIMENT CONTROL PLAN

Structural Practices

In accordance with the Large Construction General Permit the following specific BMPs will be included for construction unless deemed unfeasible. General diagrams showing the installation requirements for the structural controls are included in the appendix of this plan.

- **Avoidance of slopes steeper than 3H:1V**

As mentioned previously the construction site and surrounding areas are flat with minimal overland slopes toward the natural drainage features. The side slopes of the major drainage features on the project will be constructed at a slope of 30H :1V. Side slopes of the runway, taxiway and runway safety areas will be a maximum of 5H:1V. The centerline slope of all drainage features will be constructed on a maximum slope of 0.5 percent. The finished slopes of the 17-acre borrow area located on the west side of the runway are 80H :1 V. The proposed project slopes are well below the required maximum and will produce low velocities which will minimize stormwater erosion and sediment transport.

- **Maintenance of a buffer zone between construction activities and a perennial water body of 150 feet**

The topography of the project is flat with slight relief to the south and west as shown on the Site Plan presented in Figure 2. Stormwater runoff from the east side of the runway centerline will be conveyed through a constructed swale. The swale will discharge into an unnamed tributary of Tobacco Juice Creek. The stormwater flow from west side of the runway centerline will flow overland into an existing ditch on the project site which discharges into the same unnamed tributary of Tobacco Juice Creek. The stormwater from the 17-acre borrow area will flow overland in a southeasterly direction into an unnamed tributary of Tobacco Juice Creek.

The total combined stormwater flow will travel approximately 0.25 miles in an unnamed tributary to the confluence with Tobacco Juice Creek

- **Preservation and stockpiling of topsoil**

Topsoil will be stockpiled during grading operations. Any stockpiled topsoil will be uniformly spread over the disturbed areas upon completion of construction activities. Wattles will be used to control erosion from the stockpiled top soil.

- **Installation of construction entrances**

There is a single entrance to the construction work area off of the Highway 25 bypass. The entrance will be used for worker access and to bring construction materials including borrow material onsite. The movement of heavy equipment / dump trucks to import material onto the site will be required in this project. A 2,000 - foot access road with a crushed stone surface will be constructed as shown in Figure 3. The crushed stone surface will provide the required roughness when combined with the length of the road to remove any soil / material from the truck tires prior to the trucks moving onto the adjacent roadway. Therefore, a MDOT construction entrance is not considered to be necessary. Should any off site tracking be observed large gabion stone is onsite and will be used to provide a MDOT construction entrance. All workers will use the same entrance on a daily basis and will be instructed to immediately clean up any off – tracking observed.

- **Installation of stormwater drain inlet protection**

There is a single stormwater inlet / outlet with associated 36-inch diameter concrete stormwater piping which is to be installed as part of this project just inside the interior southeast corner of the proposed taxiway. The stormwater inlet within the construction area will be protected from sediment intrusion. Protection shall be provided at the inlet end of the proposed piping with structural controls consisting of straw bales. See general details for inlet protection in the Appendix.

- **Installation of perimeter structural controls**

Perimeter controls will be provided as required along the downgradient perimeters of the exposed construction site and will consist of straw wattles and / or silt fence. Wattles will be used as needed at critical points around the perimeter of the disturbed areas and along the backslopes to mitigate erosion and retain and prevent eroded material from leaving the site. All-natural vegetation beyond the perimeter controls will be left undisturbed on the project perimeter to provide maximum protection.

As discussed previously due to restrictions on the construction of a sedimentation basins silt fence will be installed as shown in the Site Plan presented in Figure 2.

- **Phasing or sequencing of construction activities:**

All construction activities will be phased as much as possible in an effort to minimize the

amount of exposed soil.

Vegetative Controls

Vegetative barriers will be used to control erosion wherever possible. Construction activities will be planned and executed so that any vegetative areas along the edges of the project site which could reduce erosion will be allowed to remain undisturbed. All trees which do not have to be removed for construction or FAA regulations will be protected. When construction activity is to be suspended for 14 days or more, temporary vegetative erosion control measures such as seeding and/or mulching will be provided within 7 calendar days.

Good Housekeeping Practices

The Contractor staging area shown in the Overall Project Layout Map provided in Figure 3 will be the location of the following facilities and activities:

- Equipment maintenance and repair
- Waste receptacles for regular collection of wastes
- Adequately maintained sanitary facilities
- Materials, tools, equipment and temporary vehicle storage

Waste receptacles and portable toilets will be located on site for construction personnel use. These facilities will be placed in areas so as to not interfere with the function of structural controls. Waste receptacles will be emptied on a regular basis. Any potentially hazardous materials will be kept in the contractor's vehicles. No potentially hazardous materials will be stored around the construction area overnight. Small equipment repair jobs will be done in the field as long as there is no potential for stormwater contamination. Larger jobs and smaller ones with potential to contaminate stormwater will be performed off site.

Access to the site will be a 2,000 - foot crushed limestone topped access road which extends off of Mississippi Highway 25 south as shown on the Overall Project Layout Map presented in Figure 3. The entire project site is enclosed in a security fence with a gate at the Mississippi Highway 25 North entrance. The gate will be locked at all times except when the Contractor is onsite. The crushed stone topping on the access road will provide a rough surface which should eliminate any offsite tracking. The entrance will be checked several times on a daily basis when workers enter / exit the project site. Any observed offsite tracking will be collected from the adjoining highway and properly disposed

immediately. Large gabion stone is stockpiled on site and can be placed on the road to aid in eliminating offsite tracking should it be required.

All sediment control BMPs including silt fence, wattles, storm drain inlets / outlets and straw bales will be inspected after a rainfall event. Any collected sediment which could possibly affect the function of the BMP will be removed and properly disposed. The BMP will be inspected to insure it is functioning properly and repaired or replaced if required.

3. PERMANENT EROSION CONTROL PLAN

Structural

The design of finished grades for the site will minimize slopes and the potential for erosion. The site design and soil type are compatible to provide a finished site which will be easily maintained and not susceptible to erosion.

Vegetative

All abraded areas are to be seeded, fertilized and mulched. Any areas not covered by paving or other non-erodible surfaces will be maintained in a grassed condition. The Contractor will be required to provide a vegetative cover over all disturbed areas of the site with a minimum of established coverage density of 97 percent prior to project closeout. Any deficiencies in the vegetative cover will be further addressed by the Contractor during the contract warranty period and the ground crew at the airport.

4. STAFF TRAINING REQUIREMENTS

Each operator, or group of multiple operators, must assemble a “stormwater team” to carry out compliance activities associated with the requirements in this permit. Prior to the commencement of construction activities, the contractor must ensure that the following personnel on the stormwater team understand the requirements of this permit and their specific responsibilities with respect to those requirements:

- (1) Personnel who are responsible for the design, installation, maintenance, and/or repair of stormwater controls (including pollution prevention controls);
- (2) Personnel responsible for the application and storage of treatment chemicals (if applicable)
- (3) Personnel who are responsible for conducting inspections as required in ACT6, S-5; and
- (4) Personnel who are responsible for taking corrective actions as required in ACT6, S-2.

The contractor is responsible for ensuring that all activities on the site comply with the requirements of this permit. The contractor is not required to provide or document formal training for subcontractors or other outside service providers, but the contractor must ensure that such personnel understand any requirements of this permit that may be affected by the work they are subcontracted to perform. At a minimum, members of the stormwater team must be trained to understand the following if related to the scope of their job duties (e.g., only personnel responsible for conducting inspections need to understand how to conduct inspections):

- The permit deadlines associated with installation, maintenance, and removal of

stormwater controls and with stabilization.

- The location of all stormwater controls on the site required by this permit and how they are to be maintained.
- The proper procedures to follow with respect to the permit's pollution prevention requirements.
- When and how to conduct inspections, record applicable findings, and take corrective actions.

Each member of the stormwater team must have easy access to an electronic or paper copy of applicable portions of this permit, the most updated copy of the SWPPP and other relevant documents or information that must be kept with the SWPPP.

Staff Training Documentation

Staff Training conducted to meet the requirements of this ACT5, T-20 of the stormwater permit shall be documented. Training records shall include employee's name, date of training, brief content/nature of training, and the employee's signature acknowledging training was received. Staff training associated with this permit may be documented on the Employee Training Log that is provided in the Large Construction Forms in the Appendix of this SWPPP. The contractor may use an alternative form to record this information, so long as it includes all of the information on the above referenced form. Employee training documentation shall be maintained on-site with the SWPPP and made available to MDEQ personnel for inspection upon request.

5. IMPLEMENTATION AND INSPECTIONS

Implementation

The contractor will be responsible for implementing controls appropriate for the conditions encountered or created by construction activities. After construction is complete, permanent erosion controls provided by the plans and specifications will be in place.

Implementation Sequence

1. Structural controls will be installed on the upslope and downstream sides of the areas to be disturbed by construction activities as required.
2. Earthwork activities for construction of the of runway/ taxiway extension will be initiated.
3. Additional erosion and sediment control measures will be implemented as required and as indicated by the required inspections.
4. As soon as feasible permanent erosion control measures will be implemented in completed areas of the project.
5. A completed Notice of Termination (NOT) of coverage form will be submitted to the OPC within 30 days of final stabilization of the covered project.

Inspections

The contractor will make inspections as provided by the permit conditions to ensure that erosion controls are in place and that no additional controls are required to minimize sediment transport from the construction site. Inspections of all outfalls and discharge points will be made by a person knowledgeable in the principles and practices of erosion and sediment controls who possesses the skills to assess conditions at the construction site that could impact stormwater quality and to assess the effectiveness of any sediment and erosion control measures selected to control the quality of stormwater discharges from the construction activity.

Inspection Frequency

1. As often as is proven necessary to ensure that appropriate erosion and sediment controls have been properly constructed and are being properly maintained, **but not in any case less than weekly for a minimum of four (4) inspections per month.**
2. A “walk through” inspection will be done before any anticipated storm events.
3. Additionally, inspections shall be conducted after all storm events which produce a discharge from the site.

Visual inspections will include inspections of the construction perimeter for evidence of sediment entering the drainage system or impoundment. Structural and vegetative controls will be inspected for effectiveness. The drainage system will be inspected along with all structural and vegetative controls. These inspections are intended to evaluate compliance with the existing pollution prevention plan and to determine if site conditions warrant any modifications to the plan.

Should the result of an inspection indicate any poorly functioning erosion or sediment controls, non-compliant discharges or any other deficiencies observed during the inspections required under the permit the deficiency shall be corrected as soon as possible but not to exceed 24 hours after the inspection unless prevented by unsafe weather conditions as documented on the inspection form.

Maintenance

Should inspections reveal any vegetated areas showing incomplete coverage the exposed area shall be replanted. Maintenance of these areas will require reseeding, fertilizer and nutrient addition followed by mulching for erosion control and supplemental watering during dry conditions until plant establishment.

When structural controls, such as straw bale dikes, silt fences, sediment traps, wattles, check dams etc., are one-third to one-half silted in, sediment will be removed or the controls otherwise maintained to ensure continued effectiveness. Upon removal of sediment the structural control shall be carefully inspected to insure continued efficient sediment retention. Replace any observed defective structural controls within 24 hours of discovery. All sediment removed from structural controls shall be placed in an area where it will not produce future sediment control issues.

6. TERMINATION OF PERMIT COVERAGE

Within 30 days of final stabilization for a covered project, a completed Request for Termination of Coverage form and colored photographs of the stabilized site shall be submitted to the Permit Board. Upon receiving the RFT, MDEQ staff may visit the site. If no sediment or erosion control problems are identified and adequate permanent controls are established, the owner or operator will receive a termination letter. Coverage is not terminated until notified in writing by MDEQ. Failing to submit a RFT is a violation of permit conditions.

7. REPORTING AND PLAN AMENDMENT

Inspection Reports

The results of all compliance inspections will be compiled and kept with the SWPPP until the project is complete and ready for termination of reporting and permit coverage. The permit reporting form to be used for this purpose is presented in the Large Construction Forms Package in the Appendix. These reports will include the date, time and amount of rainfall events; any deficiencies noted; and any corrective action required. All records, reports, forms, and information resulting from activities required by this permit shall be retained for a period of 3 years from the date of document origin.

Non-Compliance Reports

Any non-compliance with the permit which is anticipated to occur must be reported to the Office of Pollution Control 10 days or more prior to the non-compliance, or as soon as possible. Any unanticipated non-compliance must be reported verbally within 24 hours of discovery, with a written notice of such non-compliance to follow within five working days.

Plan Amendment

If any compliance inspection indicates the need to amend the plan, the plan will be amended accordingly and the amendments submitted to the Office of Pollution Control within 30 days.

Keep a Copy Available at the Permitted Facility or Locally Available
Submit the Inspection Reports Only if Requested by the Mississippi Department of Environmental Quality (MDEQ)

**LARGE CONSTRUCTION GENERAL PERMIT
SITE INSPECTION AND CERTIFICATION FORM
COVERAGE NUMBER (MSR10 _ _ _ _)**



INSTRUCTIONS

Results of construction storm water inspections required by ACT6 of this permit shall be recorded on this report form and kept with the Storm Water Pollution Prevention Plan (SWPPP) in accordance with the inspection documentation provisions of ACT9 of the this permit. Inspections shall be performed at least weekly for a minimum of four inspections per month. The coverage number must be listed at the top of all Inspection and Certification Forms.

COVERAGE RECIPIENT INFORMATION

OWNER/PRIME CONTRATOR NAME: _____
PROJECT NAME: _____
PROJECT STREET ADDRESS: _____
PROJECT CITY: _____ PROJECT COUNTY: _____
OWNER/PRIME CONTRACTOR MAILING ADDRESS: _____
MAILING CITY: _____ STATE: _____ ZIP: _____
CONTACT PERSON: _____ CONTACT PHONE NUMBER: (_____) _____
EMAIL ADDRESS: _____

INSPECTION DOCUMENTATION

DATE (mo/day/yr)	TIME (hr:min AM/PM)	ANY DEFICIENCIES? (CHECK IF YES)	INSPECTOR(S)
		☐	
		☐	
		☐	
		☐	
		☐	
		☐	

Deficiencies Noted During any Inspection (give date(s); attach additional sheets if necessary): _____

Corrective Action Taken or Planned (give date(s); attach additional sheets if necessary): _____

Based upon this inspection, which I or personnel under my direct supervision conducted, I certify that all erosion and sediment controls have been implemented and maintained, except for those deficiencies noted above, in accordance with the Storm Water Pollution Prevention Plan (SWPPP) and sound engineering practices as required by the above referenced permit. I further certify that the LCNOI and SWPPP information is up to date.

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fines and imprisonment for knowing violations.

Authorized Signature

Date

Printed Name

Title

APPENDIX

- Large Construction Stormwater General Permit
- Large Construction Forms
- Structural Controls General Details
- USGS Soils Report Information for Oktibbeha County, MS
- Site Inspection Photographs

- Large Construction Stormwater General Permit



***State of Mississippi
Department of Environmental Quality
Office of Pollution Control***

Certificate of Permit Coverage

under Mississippi's Large Construction Storm Water General NPDES Permit

Be it known

**City of Starkville
Starkville, Mississippi**

having submitted an acceptable Construction Notice of Intent, is hereby granted this Certificate of Permit
Coverage in order to discharge storm water associated with the construction of

**Starkville George M Bryan Field Airport
Receiving Stream: Tobacco Juice Creek
Oktober County**

Becky Simonson

Chief, Environmental Permits Division

Coverage No: MSR109248

Date of Coverage: July 09, 2024

Date Permit Expires: January 31, 2027

Date Coverage Modified: August 19, 2025



State of Mississippi
Mississippi Department of Environmental Quality (MDEQ)



LARGE CONSTRUCTION GENERAL PERMIT

FOR LAND DISTURBING ACTIVITIES OF FIVE (5) OR MORE ACRES

THIS CERTIFIES THAT

PROJECTS ISSUED A CERTIFICATE OF COVERAGE UNDER THIS PERMIT ARE GRANTED PERMISSION TO DISCHARGE STORM WATER FROM REGULATED CONSTRUCTION ACTIVITIES INTO STATE WATERS

in accordance with effluent limitations, inspection requirements and other conditions set forth in herein. This permit is issued in accordance with the provisions of the Mississippi Water Pollution Control Law (Section 49-17-1 et seq., Mississippi Code of 1972), and the regulations and standards adopted and promulgated thereunder, and under authority granted pursuant to Section 402(b) of the Federal Water Pollution Control Act.

Mississippi Environmental Quality Permit Board

Krystal Rudolph

Authorized Signature

Mississippi Department of Environmental Quality

Issued: **February 4, 2022**

Permit No. **MSR10**

Expires: **January 31, 2027**

AI# 24066

Large Construction Storm Water General Permit

THIS PAGE WAS INTENTIONALLY LEFT BLANK

Large Construction Storm Water General Permit Table of Contents

ACT1 (Large Construction) Introduction:	
Narrative	Requirements
Introduction	1
ACT2 (Large Construction) Permit Applicability and Coverage:	
Narrative Requirements	
Permit Area	2
Eligibility.....	2
Allowable Non-Storm Water Discharges	2
Prohibited Non-Storm Water Discharges	3
This Permit Does Not Authorize (storm water discharges not eligible for coverage).....	4
ACT3 (Large Construction) Obtaining Coverage:	
Submittal/Action Requirements	
Obtaining Authorization.....	5
Requiring an Individual Permit or Alternative General Permit.....	6
How to Obtain Recoverage Under the Reissued Permit.....	6
Commercial Development-Individual Lots and Parcels	7
Residential Subdivision-Individual Lots	7
Residential Subdivision-Expansions	7
Residential Subdivision-New Phases and New Owner.....	8
Applicability of Requirements for Individual Lots and Parcels in a Larger Common Plan of Development or Sale	8
ACT4 (Large Construction) Notice of Intent (LCNOI):	
Submittal/Action Requirements	
Notification Requirements.....	9
Required Submittals with the LCNOI	9
Additional Required Submittals May Include.....	9
Additional Notification.....	9
Modification Notification.....	10
Major Modification Notification	10
Narrative Requirements	
Where to Obtain LCNOI Forms	11
Where to Submit the LCNOI.....	11
Failure to Notify.....	11
ACT5 (Large Construction) Storm Water Pollution Prevention Plan (SWPPP) Requirements and Content:	
Narrative Requirements	
SWPPP Development.....	12
SWPPP Content	12
Erosion and Sediment Controls and Soil Stabilization Requirements	12
Vegetative Practices	14
Structural Practices.....	15
Discharge into an Impaired Receiving Water	16
Description of Post Control Measures.....	16
Responsible Parties for Larger Common Plan of Development or Sale	16

Large Construction Storm Water General Permit

Table of Contents

Housekeeping Practices	17
Construction Dewatering Activities.....	18
Flocculant Application	19
Scaled Site Map	20
Implementation Sequence	20
Implementation of Controls.....	21
Maintenance and Weekly Inspections	21
Non-Storm Water Discharge Management.....	21
Final Stabilization.....	21
Example SWPPPs	22
Training Requirements	22
ACT6 (Large Construction) Implementation and Inspection Requirements:	
Submittal/Action Requirements	
Implementation Requirements	24
Compliance with Local Storm Water Ordinances.....	25
Inspection Requirements	26
ACT7 (Large Construction) Storm Water Limitation Requirements:	
Limitation Requirements	
Non-Numeric Limitation Requirements	27
AC8 (Large Construction) Application of Flocculants:	
Narrative Requirements	28
ACT9 (Large Construction) Record Keeping and Reporting Requirements:	
Record Keeping Requirements	
Retention of Records	29
Submittal/Action Requirements	
Suspension of Weekly Inspections and Monthly Record Keeping	30
ACT10 (Large Construction) Termination of Permit Coverage:	
Submittal/Action Requirements.....	31
ACT11 (Large Construction) Standard Requirements Applicable To All Water Permits	
Narrative Requirements	
Duty to Comply.....	32
Duty to Mitigate.....	32
Duty to Provide Information	32
Property Rights	32
Severability.....	32
Oil and Hazardous Substance Liability	32
Signatory Requirements	33
Duly Authorized Representative.....	34
Changes to Authorization	34
Certification.....	34
Proper Operation and Maintenance	35

Large Construction Storm Water General Permit

Table of Contents

Monitoring and Records.....	35
Bypass Prohibition	36
Upset Conditions.....	36
Inspection and Entry.....	37
Permit Actions.....	37
Noncompliance Reporting.....	38
Reopener Clause	38
Permit Modification	38
Transfers.....	38
Continuation of Expired General Permit	39
Falsifying Reports	39
Civil and Criminal Liability	39
ACT12 (Large Construction) Definitions.....	40

Large Construction Storm Water General Permit

THIS PAGE WAS INTENTIONALLY LEFT BLANK

ACT1 (LCGP) Introduction:

Narrative Requirements:

Condition	
No.	Condition
T-1	The Large Construction General Permit (LCGP) authorizes storm water discharges from construction activities five (5) acres or greater or less than five (5) acres if part of a "larger common plan of development or sale" (see Definitions). Storm water discharges that enter waters of the State or storm water conveyance systems leading to waters of the State are subject to regulation and compliance with the conditions set forth in this permit. This permit also authorizes storm water discharges from any other construction activity designated by the Executive Director based on the potential for contribution to an excursion of a water quality standard or for significant contribution of pollutants to waters of the State. This permit replaces the previous Large Construction General Permit that expired on December 31, 2021. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT2 (LCGP) Permit Applicability and Coverage:**Narrative Requirements:**

Condition No.	Condition
T-1	PERMIT AREA: The Large Construction General Permit covers all areas of the State of Mississippi. [11 Miss. Admin. Code Pt. 6, R. 1]
T-2	ELIGIBILITY: (1) Discharges composed entirely of storm water and allowable non-storm water discharges (see ACT5, T-14 for additional requirements) from construction activity, including clearing, grading, grubbing, excavating and other land disturbing activities of five (5) or more acres or less than five (5) acres if part of a "larger common plan of development or sale" (see Definitions). (2) Allowable Non-Storm Water Discharges: (A) Discharges from actual fire-fighting activities (B) Fire hydrant flushing (C) Water used to control dust (D) Potable water sources including uncontaminated water line flushing (E) Routine external building wash down that does not use detergents (F) Pavement wash waters where spills or leaks of toxic or hazardous materials have not occurred (unless all spilled material has been removed) and where detergents are not used (G) Uncontaminated air conditioning or compressor condensate (H) Uncontaminated ground water or spring water (I) Foundation or footing drains where flows are not contaminated with process materials such as solvents (J) Landscape irrigation (K) Water used to wash vehicles, wheel wash water and other wash waters where detergents are not used. (L) Construction dewatering water discharged in accordance with ACT5, T-11. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT2 (continued):**Narrative Requirements:**

Condition No.	Condition
T-3	ELIGIBILITY (continued): (3) Prohibited Non-Storm Water Discharges: (A) Wastewater from washout of concrete (unless managed by an appropriate control) (B) Wastewater from washout and cleanout of stucco, paint, form release oils, curing compounds and other construction materials (C) Fuels, oils, or other pollutants used in vehicle and equipment operation and maintenance (D) Soaps or solvents used in vehicle and equipment washing (E) Wastewater from sanitary facilities, including portable toilets (F) Contaminated discharge waters from dewatering activities (G) Toxic or hazardous substances from a spill or other release. (4) A project is eligible for coverage under this general permit for discharges of pollutants of concern to water bodies for which there is a Total Maximum Daily Load (TMDL) established or approved by the Environmental Protection Agency (EPA) if measures and controls are incorporated that are consistent with the assumptions and requirements of such TMDL. To be eligible for coverage under this general permit, the project must incorporate in the Storm Water Pollution Prevention Plan (SWPPP) and/or effluent limitation any conditions applicable to any discharge(s) necessary for consistency with the assumptions and requirements of such TMDL. If, after coverage issuance, a specific wasteload allocation is established that would apply to the project's discharge, the project owner/operator must determine and implement all of the steps necessary to meet that allocation within three (3) months from the final TMDL approval date. MDEQ's approved TMDL list may be found at the link listed in paragraph (5) below. In addition, MDEQ's Planning & Design Manual for the Control of Erosion, Sediment and Storm Water identifies specific controls that may be used to address consistency with any applicable TMDLs. The manual can be found at: www.mdeq.ms.gov/construction-stormwater/) (5) A project is eligible for coverage under this general permit for discharges of storm water to impaired water bodies on MDEQ's 303(d) list, provided best management practices (BMPs) are employed that prohibit further impairment of the designated and/or existing beneficial uses in the receiving water body. To be eligible for coverage under this general permit, the owner/operator must indicate on the LCNOI that the project discharges to a 303(d) listed receiving water and incorporate appropriate BMPs in its SWPPP. MDEQ's 303(d) list of impaired water bodies may be found on MDEQ's website at: https://opcgis.deq.state.ms.us/tmdls/). [11 Miss. Admin. Code Pt. 6, R. 1]

ACT2 (continued):

Narrative Requirements:

Condition No.	Condition
T-4	THIS PERMIT DOES NOT AUTHORIZE: (1) Discharges which result in violation of State Water Quality Standards. Whenever a discharge authorized under this permit is later determined to cause or have the reasonable potential to cause or contribute to the violation of an applicable water quality standard, MDEQ will notify the regulated entity of such water quality violation(s) in writing and will provide the information used by MDEQ to make this determination. The regulated entity must take all necessary actions required to ensure future discharges do not cause or contribute to the violation of a water quality standard. If such violations remain or re-occur, then additional measures, such as the addition of Best Management Practices (BMPs) and modification of the SWPPP will be submitted to MDEQ for approval or the requirement to obtain an individual permit, may be required by the Permit Board. Compliance with this requirement does not preclude any enforcement activity as provided by the Clean Water Act for the underlying violation. (2) Activities that affect waters of the U.S., including wetlands, without obtaining the necessary U.S. Army Corps of Engineers (COE) approval. This may include a COE individual Section 404 permit or coverage under a COE nationwide or general permit. Appropriate documentation must be submitted with the Large Construction Notice of Intent (LCNOI). [11 Miss. Admin. Code Pt. 6, R. 1]
T-5	(3) Discharges or discharge-related activities that are likely to jeopardize the continued existence of any species that is listed as endangered or threatened under the Endangered Species Act (ESA) or result in the adverse modification or destruction of habitat that is designated as critical under the ESA. Coverage under this permit is available only if the regulated entity's storm water discharges, allowable non-storm water discharges, and discharge-related activities are not likely to jeopardize the continued existence of any species that is listed as endangered or threatened ("listed") under the ESA or result in the adverse modification or destruction of habitat that is designated as critical under the ESA ("critical habitat"). Submission of a signed LCNOI, or County Utility Authority approval, if applicable, will be deemed to constitute the regulated entity's certification of eligibility. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT3 (LCGP) Obtaining Coverage:**Submittal/Action Requirements:**

Condition
No.

Condition

S-1

OBTAINING AUTHORIZATION:

(1) Owners and/or operators (see Definitions) desiring coverage associated with large construction activity under this permit must submit a Large Construction Notice of Intent (LCNOI) and other required submittals in accordance with the requirements of this permit. For construction activities, the operator is typically the Prime Contractor. However, if the prime contractor does not meet the definition of operator, then the owner must apply. The owner may submit the LCNOI and later, prior to actual construction, the operator may submit the Prime Contractor Certification accepting joint and severable responsibility for applicable permit conditions.

Where there are multiple operators associated with the same project, all operators must obtain permit coverage. Subcontractors generally are not considered operators for the purposes of this permit. The applicant shall identify the construction support activities for their project in the SWPPP. If the operator of a construction support activity is different than the operator of the main site, that operator must abide by the approved SWPPP. If a SWPPP was prepared under a previous version of this permit, the operator must review and update the SWPPP to ensure that this permit's requirements are addressed prior to submitting separate approved MDEQ authorization forms for coverage under this permit. Unless receiving prior MDEQ approval, projects with multiply operators shall submit a group SWPPP covering all aspects of construction activities in accordance to ACT5 of this permit. Regardless of whether there is a group SWPPP or multiple individual SWPPPs, each operator is responsible for compliance with the permit's terms and conditions.

Owners, developers and prime contractors that meet the definition of the operator shall apply for permit coverage on the same NOI, if possible. The division may accept separate NOI forms from different operators for the same construction site when warranted.

The owner(s) of the property and the operator(s) associated with the regulated construction activity on the property have joint and severable responsibility for compliance with the permit. Notwithstanding any permit condition to the contrary, the coverage recipient and any person who causes pollution of waters of the state or places waste in a location where they are likely to cause pollution, shall remain responsible under applicable federal and state laws and regulations, and applicable permits.

(2) Upon review of the LCNOI, the MDEQ staff may require additional information (including modification of the SWPPP, which could require the implementation

Submittal/Action Requirements:

Condition
No.

Condition

of additional controls), recommend that coverage not be granted and/or that an alternate permit would be more appropriate. The MDEQ staff recommendations may be brought before the Mississippi Environmental Quality Permit Board (Permit Board) for review and consideration at a regularly scheduled meeting or at a special meeting at its discretion.

(3) Coverage under this permit will not be granted until all other required MDEQ permits, certifications and approvals are satisfactorily addressed.

(4) Owners or operators are authorized to discharge storm water associated with large construction activity under the terms and conditions of this permit only upon receipt of written notification of approval of coverage by the Permit Board staff. Discharge of storm water without written notification of coverage under this permit or issuance of an individual National Pollutant Discharge Elimination System (NPDES) Storm Water Permit is a violation of the Mississippi Air and Water Pollution Control Law 49-17-29(2)(b). [11 Miss. Admin. Code Pt. 6, R. 1]

S-2 REQUIRING AN INDIVIDUAL PERMIT OR ALTERNATIVE GENERAL PERMIT:

(1) The Permit Board may require any coverage recipient to apply for and obtain either an individual or an alternative general NPDES permit. Any interested person may petition the Permit Board to take action under this paragraph. The Permit Board may require any coverage recipient to apply for an individual NPDES permit only if the owner or operator has been notified in writing. Such notice shall include reasons for this decision, an application form and a filing deadline. The Permit Board may grant additional time at its discretion, upon request. If a coverage recipient fails to submit a requested application in a timely manner, coverage under this permit will automatically terminate at the end of the day specified for application submittal.

(2) Any coverage recipient may request to be excluded from permit coverage by applying for an individual permit or coverage under another general permit. The applicant shall submit an individual application (EPA Forms 1 and 2F along with the narrative requirements of 40 CFR 122.26(c)(1)(ii)) or the appropriate Notice of Intent.

(3) Coverage under this permit is automatically terminated on the issuance date of the respective alternative individual permit or general permit coverage. When the request for an alternative individual permit or general permit coverage is denied, coverage under this permit continues unless terminated by the Permit Board. [11 Miss. Admin. Code Pt. 6, R. 1]

S-3 HOW TO OBTAIN RECOVERY UNDER THE REISSUED PERMIT:

If reissuance of this permit does not occur before its expiration date, continued coverage under this permit will be allowed until the effective date of the reissued general permit coverage. Once the Large Construction General Permit is reissued, active coverage recipients will receive a Recovery Form with a Letter of Instruction. If a coverage recipient wishes to be covered by the reissued Large Construction General Permit, the Recovery Form must be completed and returned to the MDEQ in accordance with the provisions of the Letter of Instruction. Resubmittal of the Storm Water Pollution Prevention Plan (SWPPP) is not required if

ACT3 (LCGP) Obtaining Coverage:**Submittal/Action Requirements:**

Condition No.	Condition
S-4	COMMERCIAL DEVELOPMENT - INDIVIDUAL LOTS OR PARCELS: Individual lots or parcels within a commercial development that are part of the "larger common plan of development or sale" (see Definitions) are regulated regardless of size or owner. If the owner or developer obtains construction permit coverage for a development then sells lots or parcels within that development, permit coverage must continue on those areas under new ownership. The original coverage recipient is responsible for all construction activities until individual lots or parcels within the development are sold to others and the new owner submits a LCNOI (regardless of size) and obtains coverage under Mississippi's Large Construction General Permit or applies for an individual permit. [11 Miss. Admin. Code Pt. 6, R. 1]
S-5	RESIDENTIAL SUBDIVISION - INDIVIDUAL LOTS: Individual lots within a residential subdivision that are part of the "larger common plan of development or sale" (see Definitions) are regulated regardless of size or ownership. If the owner or developer obtains construction permit coverage for a residential development, then sells individual lots within that development, permit coverage shall continue on those lots under new ownership. The original coverage recipient may retain responsibility for permit compliance, or the new owner (purchaser) or operator shall satisfy authorization requirements by: (1) Completing and submitting the MDEQ Registration Form (see Large Construction Forms Package) and developing and implementing a sediment and erosion control plan for the specific lot(s), or (2) Completing and submitting for approval from the MDEQ, a LCNOI and required documents, or (3) Applying for an individual storm water permit. The owner or developer (seller) is responsible for providing the new owner or operator (purchaser) with a copy of the MDEQ Registration Form and a copy of the Large Construction General Permit. These documents, as well as the individual application, may be found on MDEQ's website at www.mdeq.ms.gov/construction-stormwater/ or by calling 601-961-5171. [11 Miss. Admin. Code Pt. 6, R. 1]
S-6	RESIDENTIAL SUBDIVISION - EXPANSIONS: For subsequent phases, expansions and major modifications of subdivision development that are proposed but were not included in the original SWPPP, the

ACT3 (continued):

Submittal/Action Requirements:

Condition	Condition
No.	
	coverage recipient shall submit to MDEQ the Major Modification Form (see Large Construction Forms Package). [11 Miss. Admin. Code Pt. 6, R. 1]
S-7	RESIDENTIAL SUBDIVISION - NEW PHASES AND NEW OWNER: If an individual, other than the original developer (coverage recipient), proposes construction of a new phase of an existing subdivision and the proposed phase was not included in the initial submittal of the LCNOL, the new owner or operator must apply for separate permit coverage. [11 Miss. Admin. Code Pt. 6, R. 1]
S-8	APPLICABILITY OF REQUIREMENTS FOR INDIVIDUAL LOTS AND PARCELS IN A LARGER COMMON PLAN OF DEVELOPMENT OR SALE: The original coverage recipient remains responsible for compliance with this general permit until a new owner or operator satisfies the requirements of S-4 and S-5 of this ACT. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT4 (LCGP) Large Construction Notice of Intent (LCNOI):**Submittal/Action Requirements:**

Condition No.	Condition
S-1	NOTIFICATION REQUIREMENTS: Persons desiring coverage for a storm water discharge associated with construction activity under this general permit must submit a LCNOI Form with the required submittals. Discharge of storm water without written notification of coverage under this permit or issuance of an individual National Pollutant Discharge Elimination System (NPDES) Storm Water Permit is a violation of the Mississippi Air and Water Pollution Control Law 49-17-29(2)(b). [11 Miss. Admin. Code Pt. 6, R. 1]
S-2	REQUIRED SUBMITTALS WITH THE LCNOI: Submittals required with a completed LCNOI include a site-specific SWPPP associated with the construction activities, a United States Geological Survey (USGS) quad map, or color photocopy of the quad map, extending at least 1/2 mile beyond the facility property boundaries with the site location outlined or highlighted. [11 Miss. Admin. Code Pt. 6, R. 1]
S-3	ADDITIONAL SUBMITTALS MAY INCLUDE THE FOLLOWING: (1) Appropriate Section 404 documentation from U.S. Army Corps of Engineers, (2) Appropriate documentation concerning future disposal of sanitary sewage and sewage collection system construction, (3) Appropriate documentation from the MDEQ Office of Land & Water concerning dam construction and low flow requirements, and/or (4) Approval for wastewater for all residential and commercial subdivisions in the form of a signed certification by the official responsible for the wastewater treatment facility that will serve the proposed project. (5) Appropriate plans for affecting waters of the State of Mississippi. [11 Miss. Admin. Code Pt. 6, R. 1]
S-4	ADDITIONAL NOTIFICATION: The covered owner or operator must notify the Permit Board at least 30 days before any planned changes of ownership or whenever there are any changes in

ACT4 (continued):**Submittal/Action Requirements:**

Condition No.	Condition
	information previously submitted in the LCNOI Form. [11 Miss. Admin. Code Pt. 6, R. 1]
S-5	MODIFICATION NOTIFICATION: The coverage recipient must notify the Permit Board at least 30 days before: (1) Any planned changes in project operations that may affect storm water discharges, (2) Any planned changes of ownership, or (3) Any changes in information previously submitted in the LCNOI. [11 Miss. Admin. Code Pt. 6, R. 1]
S-6	MAJOR MODIFICATION NOTIFICATION: (1) The following activities require the submittal of a Major Modification Form. This form can be found in the Large Construction Forms Package, which can be obtained from MDEQ at the address given in T-2 of this ACT or from the MDEQ website at www.mdeq.ms.gov/construction-stormwater/. (A) SWPPP details have been developed and are ready for MDEQ review for subsequent phases of an existing, covered project. (B) Footprint identified in the original LCNOI is proposed to be enlarged (a modified SWPPP and an updated USGS topographic map must be submitted with the Major Modification Form). (2) Coverage recipients are authorized to implement the proposed modifications, under the conditions of the General Permit, only upon receipt of written notification of approval by the MDEQ. (3) Proposed changes may require termination of the General Permit coverage and/or application for an individual or alternative general permit. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT4 (continued):**Narrative Requirements:**

Condition No.	Condition
T-1	WHERE TO OBTAIN LCNOI FORMS: LCNOI Forms may be obtained from the MDEQ at the address shown below or by calling 601-961-5171. LCNOI Forms, as well as the general permit and guidance manual, may be found on the MDEQ web site at www.mdeg.ms.gov/construction-stormwater/. Coverage under this permit will not be granted until all other required MDEQ permits, certifications and approvals are satisfactorily addressed. [11 Miss. Admin. Code Pt. 6, R. 1]
T-2	WHERE TO SUBMIT THE LCNOI: Complete and appropriately signed LCNOI Forms must be submitted to: Chief, Environmental Permits Division Mississippi Department of Environmental Quality Office of Pollution Control P.O. Box 2261 Jackson, Mississippi 39225 For priority or overnight deliveries, the physical address is: 515 East Amite Street Jackson, Mississippi 39201. In addition to mailing paper, electronic submittals are also recommended. Until December 21, 2025, a courtesy copy may be submitted electronically by: https://www.mdeg.ms.gov/construction-stormwater/ . After December 21, 2025, these forms shall be submitted electronically using the above web address. [11 Miss. Admin. Code Pt. 6, R. 1]
T-3	FAILURE TO NOTIFY: Persons who discharge storm water associated with Large Construction activity to waters of the State without an NPDES permit are in violation of the Mississippi Air and Water Pollution Control Law 49-17-29(2)(b). [11 Miss. Admin. Code Pt. 6, R. 1]

ACT5 (LCGP) Storm Water Pollution Prevention Plan (SWPPP):**Narrative Requirements:**

Condition No.	Condition
T-1	SWPPP DEVELOPMENT: A site-specific SWPPP shall be developed requiring the design, installation, implementation and maintenance of effective pollution prevention measures by each owner or operator subject to this permit. A SWPPP shall be prepared in accordance with sound engineering practices and shall identify potential sources of pollution, which may reasonably be expected to affect the quality of storm water discharges associated with construction activity. The SWPPP shall describe and ensure the implementation of specific best management practices for the project site, which will reduce pollutants in storm water discharges and assure compliance with the terms and conditions of this permit. [11 Miss. Admin. Code Pt. 6, R. 1]
T-2	SWPPP CONTENT: Erosion and Sediment Controls and Soil Stabilization Requirements: The SWPPP shall list and describe site-specific controls appropriate for the construction activities as well as the procedures for implementing such controls. Controls shall be designed to retain sediment on-site and to minimize the discharge of pollutants. If any of the below controls cannot be implemented on the project site, the SWPPP must include written justification as to why site-specific constraints and/or costs make the control(s) infeasible. At a minimum, such controls must be designed, installed and maintained to: (1) Control storm water volume and velocity within the site to minimize soil erosion; (2) Control storm water discharges, including both peak flow rates and total storm water volume, to minimize channel and stream bank erosion and scour in the immediate vicinity of discharge points; (3) Minimize the amount of soil exposed during construction activity; (4) Minimize the disturbance of steep slopes. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT5 (continued):**Narrative Requirements:**

Condition No.	Condition
T-3	SWPPP CONTENT (continued): (5) Minimize sediment discharges from the site. The design, installation and maintenance of erosion and sediment controls must address factors such as the amount, frequency, intensity and duration of precipitation, the nature of resulting storm water runoff, and soil characteristics, including the range of soil particle sizes expected to be present on the site; (6) Provide and maintain a 50-foot undisturbed natural buffer around waters of the United States; or provide and maintain an undisturbed natural buffer that is less than 50 feet and is supplemented by additional erosion and sediment controls which in combination achieves the sediment load reduction equivalent to a 50-foot undisturbed natural buffer. Direct storm water to vegetated areas and maximize storm water infiltration to reduce pollutant discharges, unless infeasible; and (7) Minimize soil compaction and, unless infeasible, preserve topsoil; (8) Direct storm water to vegetated areas, brush barriers, silt fences, check dams, etc. to aid in the filtration, infiltration, velocity reduction and diffusion of the discharge; (9) Transport runoff down steep slopes through lined channels or piping; (10) Minimize the amount of cut and fill; (11) Minimize off-site vehicle tracking of sediments; and (12) Minimize the discharge of pollutants from equipment and vehicle washing, wheel wash water, concrete wash water, and other wash waters. Wash waters must be treated in a sediment basin or alternative control that provides equivalent or better treatment prior to discharge. (13) Provide a description of any discharge associated with industrial activity other than construction stormwater that originates on site and the location of that activity and its permit number. (14) Provide a description of stormwater sources from areas other than construction and a description of controls and measures that will be implemented at those sites.

Narrative Requirements:

Condition	
No.	Condition
	(15) When permanent or temporary structures will be placed in Waters of the State, MDEQ may require the applicant to address any issues related to Mississippi Antidegradation Plan in the SWPPP during the review of the LCNOI rather than requiring a separate LCNOI or other state required permits. This provision will only apply to activities that will not require a 404 permit or a 401 certification. [11 Miss. Admin. Code Pt. 6, R. 1]
T-4	The number and type of BMPs included in the SWPPP must reflect the specific conditions of the construction site. An effective SWPPP includes a combination of BMPs that are designed to work together. A combination of BMPs is listed below and must be included as minimum components of a SWPPP. These controls must be in accordance with the design standards set forth in the most current edition of Mississippi's "Erosion Control, Sediment Control and Stormwater Management on Construction Sites and Urban Areas" found at www.mdeq.ms.gov/construction-stormwater or other accredited and approved manual of design. (1) Vegetative Practices shall be designed to preserve existing vegetation where feasible and initiate vegetative stabilization measures after land disturbing activities. Such practices may include, but not limited to, temporary seeding, permanent seeding, mulching, sod stabilization, vegetative buffer strips, tree protection and topsoil preservation. Soil stabilization-vegetative stabilization measures must be initiated whenever any clearing, grading, grubbing, excavating or other land disturbing activities have temporarily or permanently ceased on any portion of the site and will not resume for a period of fourteen (14) calendar days or more. The appropriate temporary or permanent vegetative practices shall be initiated immediately. For purposes of this permit, "immediately" is interpreted to mean no later than the next work day. If you are unable to meet the deadlines in the previous paragraph due to circumstances beyond your control, and you are using vegetative cover for temporary or permanent stabilization, you may comply with the following stabilization deadlines instead: (A) Immediately initiate, and within 14 calendar days complete, the installation of temporary non-vegetative stabilization measures to prevent erosion; (B) Complete all soil conditioning, seeding, watering or irrigation installation, mulching, and other required activities related to the planting and initial establishment of vegetation as soon as conditions or circumstances allow it on the site; and, (C) Document the circumstances that prevent you from meeting the deadlines required and the schedule you will follow for initiating and completing stabilization. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT5 (continued):**Narrative Requirements:**

Condition No.	Condition
T-5	Specific BMPs that must be included, unless infeasible (see Definitions) are: (A) Buffer zones (see Definitions) shall be maintained between land-disturbing activities and perennial water bodies. A minimum 150-foot buffer zone is recommended; however, if a 150-foot buffer zone cannot be met, the requirements outlined in ACT5, T-3(6) shall be followed. (B) Topsoil should be stockpiled and used in areas that will be re-vegetated. When final grade is reached it should be distributed to a minimum depth of 2 inches on 3:1 slopes and 4 inches on flatter slopes. The permittee shall locate the piles outside of any natural buffers established and away from any stormwater conveyances, drain inlets, and areas where stormwater flow is concentrated. The permittee shall install a sediment barrier along all downgradient perimeter areas. The permittee is prohibited from hosing down or sweeping soil or sediment accumulated on pavement or other impervious surfaces into any stormwater conveyance, storm drain inlet, or Waters of the State. (C) Heavy equipment use in areas to be re-vegetated should be avoided. If compaction cannot be avoided, the top 4 inches of the soil bed should be tilled before re-vegetation. Any necessary fertilizer or other soil amendments should be added during the tilling process. The SWPPP must contain written justification as to why any of these specific controls were not deemed feasible. [11 Miss. Admin. Code Pt. 6, R. 1]
T-6	(2) Structural practices shall divert flows from exposed soils, store flows or otherwise limit runoff from exposed areas. Such practices may include, but are not limited to, construction entrance/exit, silt fences, earth dikes, brush barriers, drainage swales, check dams, subsurface drains, pipe slope drains, level spreaders, drain inlet protection, outlet protection, detention/retention basins, sediment traps, temporary sediment basins or equivalent sediment controls. Specific practices that must be included, unless infeasible, are: Sediment basins are to be situated outside waters of the State and any natural buffers to be established. Design the basin to avoid collecting water from wetlands. Use erosion controls and velocity dissipation devices to prevent erosion at the inlets and outlets. (A) For drainage locations (a drainage point at boundary of land disturbing activity) that serve an area with ten (10) or more disturbed acres at one time, a temporary (or permanent) sediment basin providing at least 3,600 cubic feet (133 cubic yards) of storage per acre drained shall be provided until final stabilization of the site. Sediment basins must be installed before initial site grading and utilize outlet structures that withdraw water from the surface and that are designed for a minimum 2-year, 24-hour storm event. If flocculants are being introduced, sediment basins must be downstream of the point of introduction and include baffles to increase sediment removal efficiency and turbidity reduction. The capacity of the sediment basin, acreage draining to sediment basin, location on the plan, as well as the diagram of outflow structure shall be provided. (B) Due to the unique characteristics of linear projects (see Definitions), such as the lack of space within project rights of way and having multiple, distributed

ACT5 (continued):**Narrative Requirements:**

Condition No.	Condition
	discharge points, sedimentation basins are not common practices. Therefore, MDEQ will not require the use of sedimentation basins for linear projects disturbing ten (10) or more acres at one time. Appropriate alternate structural practices, such as sediment traps and check dams, must be included in the SWPPP if sediment basins are deemed infeasible. (C) Design of temporary (or permanent) sediment basins, if used, shall provide at least 3600 cubic feet (133 cubic yards) of storage per acre drained and shall be provided until final stabilization of the site. Sediment basins must be installed before major site grading and utilize outlet structures that withdraw water from the surface. The capacity of the sediment basin, acreage draining to sediment basin, location on the plan, as well as the diagram of outflow structure shall be provided. [11 Miss. Admin. Code Pt. 6, R. 1]
T-7	(D) Steep Slopes (see Definition) that cannot be avoided must have, at a minimum, silt fences or equivalent sediment controls for all down slope boundaries (and for those side slope boundaries deemed appropriate by individual site conditions), unless a sediment basin providing storage for a calculated volume of runoff from a 2-year, 24-hour storm or 3,600 cubic feet of storage per acre drained is provided. (E) Construction entrances/exits shall be installed wherever traffic will be leaving a construction site and moving directly onto a paved public road. Restrict vehicle to properly designed exit points. Use appropriate stabilization techniques at all points that exit onto paved roads. Implement additional track-out controls as necessary to ensure that sediment removal occurs prior to vehicle exit. Where sediment has been tracked-out from the site onto paved roads, sidewalks, or other paved areas outside the site, remove deposited sediment “immediately” by the end of the next work day. Remove the track-out by sweeping, shoveling, or vacuuming these surfaces, or by similarly effective means of sediment removal. Hosing or sweeping track-out sediment into any stormwater conveyance, storm drain inlet, of Waters of the State is prohibited. (F) Storm Drain Inlets-Inlets that could receive storm water from construction activities shall be protected by surrounding or covering with a filter material until final stabilization has been achieved. Clean, or remove and replace, the protection measure as sediment accumulates, the filter becomes clogged, and/or performance is compromised. Where there is evidence of sediment accumulation adjacent to inlet protection measure, remove the deposited sediment “immediately” by the end of the next work day. [11 Miss. Admin. Code Pt. 6, R. 1]
T-8	(G) Perimeter Controls-Natural areas shall be maintained and supplemented with silt fence and fiber rolls around project perimeter. If not feasible to maintain natural areas, a silt fence or similar controls, such as fiber rolls, are sufficient. (H) Phasing-Schedule or sequence construction activities to concentrate work in certain areas to minimize the amount of soil that is exposed at one time. Construction shall be phased to keep the total disturbed area less than fifty (50) acres at one time, in order to minimize erosion and limit sedimentation. The permittee can have additional disturbance with provided justification and additional controls to minimize erosion and sedimentation. With written justification of demonstrating why the project requires fifty (50) acres or more of disturbed area and additional controls to minimize erosion and sedimentation, the permittee may be allowed to disturb additional areas.

ACT5 (continued):**Narrative Requirements:**

Condition	
No.	Condition
	The SWPPP must contain written justification as to why any of these specific controls were not deemed feasible. [11 Miss. Admin. Code Pt. 6, R. 1]
T-9	(3) Facilities discharging into impaired receiving waters (i.e., receiving stream segments, which are listed on MDEQ's 303(d) List of Impaired Waters, or segments for which a Total Daily Maximum Load (TMDL) has been approved) must identify the pollutant of concern(s) for the receiving stream in the SWPPP. If applicable, the SWPPP shall describe how the selected BMPs will ensure that discharges from the site (if applicable) will not cause or contribute to exceedances of the water quality standards in the receiving stream. Additional controls may be required. (4) A description of any post-construction control measures. Post-construction control measures should be installed as necessary, to control pollutants in storm water after construction is complete. Post-construction controls must be in accordance with the design standards set forth in the most current edition of Mississippi's "Erosion Control, Sediment Control and Stormwater Management on Construction Sites and Urban Areas" found at: www.mdeq.ms.gov/construction-stormwater/. These controls include, but are not limited to, one or more of the following: on-site infiltration of runoff, flow attenuation using open vegetated swales, exfiltration trenches and natural depressions, constructed wetlands and retention/detention structures. Where needed, velocity dissipation devices shall be placed at detention or retention pond outfalls and along the outfall channel to provide for a non-erosive flow. Restrict vehicle and equipment use in these locations to avoid soil compaction. Before seeding or planting areas of exposed soil that have been compacted, use techniques that rehabilitate and condition the soils as necessary to support vegetative growth. The permittee is encouraged to design the site, the erosion prevention measures, sediment control measures, and other site management practices with consideration of minimizing stormwater runoff, both during and following construction, including facilitating the use of low-impact development (LID) and green infrastructure. (5) Proposed responsible parties (original coverage recipient or new owner or operator) for individual lots or out-parcels that are part of a larger common plan of development or sale. If permit responsibility is retained by the original coverage recipient, a narrative description of sediment and erosion controls for subdivision lots is acceptable. Out-parcels in commercial developments must be included in the scaled site map referenced below. [11 Miss. Admin. Code Pt. 6, R. 1]
T-10	Housekeeping Practices: The owner or operator shall design, install, implement and maintain practices appropriate to prevent pollutants from entering storm water from construction sites because of poor housekeeping. These practices must be listed in the SWPPP and located on the site map. The owner or operator shall: (1) minimize the exposure of building materials, building products, construction wastes, trash, landscape materials, fertilizers, pesticides, herbicides, detergents, sanitary waste and other materials present on the site to precipitation and to stormwater; (2) minimization of exposure is not required in cases where the exposure to precipitation and to stormwater will not result in a discharge of pollutants, or where exposure of a specific material or product poses little risk of

Narrative Requirements:

Condition	
No.	Condition
	stormwater contamination (such as final products and materials intended for outdoor use); (3) minimize the discharge of pollutants from spills and leaks and implement chemical spill and leak prevention and response procedures. The owner or operator shall designate and report in the SWPPP areas for equipment maintenance and repair and concrete chute wash off; provide waste receptacles and regular collection of waste; provide adequately maintained sanitary facilities; provide protected storage areas for chemicals, paints, solvents, fertilizers, pesticides, herbicides, detergents and other potentially toxic materials; and implement spill and leak prevention practices and response procedures if spills and leaks do occur; minimize the exposure of building materials, building products, construction wastes, trash and landscape materials. These areas and specific potential pollutants shall be addressed in the SWPPP and located on the scaled site map. The owner or operator shall provide a description of procedures for: (A) Sweeping or removal of sediment and other debris that has been tracked from the site or deposited from the site onto streets and other paved surfaces; (B) Removal of sediment or other pollutants that have accumulated in or near any sediment control measures, storm water conveyance channels, storm drain inlets, or water course conveyance within the construction site, and; (C) Removal of accumulated sediment that has been trapped by sediment control measures at the site, in accordance with applicable maintenance requirements covered under this permit. The owner or operator shall also provide a description of the procedures for handling and disposing of wastes generated at the site, including, but not limited to, clearing and demolition debris, sediment removed from the site, construction and domestic waste, hazardous or toxic waste, and sanitary waste. [11 Miss. Admin. Code Pt. 6, R. 1]

T-11 CONSTRUCTION DEWATERING REQUIREMENTS

Comply with the following requirements to minimize the discharge of pollutants in ground water or accumulated stormwater that is removed from excavations, trenches, foundations, vaults, or other similar points of accumulation. Dewatering discharge shall be managed by BMPs.

- (A) Treat dewatering discharges with controls to minimize discharges of pollutants with controls designed to prevent discharges with visual turbidity to minimize discharges of pollutants. (Appropriate controls include sediment basins or sediment traps, sediment socks, dewatering tanks, tube settlers, weir tanks, filtration systems (e.g., bag or sand filters), other appropriate approval controls, and passive treatment systems that are designed to remove sediment. Appropriate controls to use downstream of dewatering controls to minimize erosion include vegetated buffers, check dams, riprap, and grouted riprap at outlets or other appropriate approval controls.);
- (B) Do not discharge visible floating solids or foam;
- (C) Use an oil-water separator or suitable filtration device (such as a cartridge filter) that is designed to remove oil, grease, or other products if dewatering water

ACT5 (continued):**Narrative Requirements:**

Condition

No. Condition

is found to contain these materials; The discharge must not cause the formation of a visible sheen or visible hydrocarbon deposits on the bottom or shoreline of the receiving water.

(D) To the extent feasible, use vegetated, upland areas of the site to infiltrate dewatering water before discharge. Using waters of the State as part of the treatment area is prohibited;

(E) To prevent sediment discharge from causing erosion: (1) Use stable, erosion-resistant surfaces (e.g., well-vegetated grassy areas, clean filter stone, geotextile underlayment) for the discharge from dewatering controls; (2) Do not place dewatering controls, such as pumped water filter bags, on steep slopes.

(F) At all points where dewatering water is discharged, velocity dissipation BMPs must be implemented. The discharge must not cause re-suspension;

(G) With backwash water, either haul it away for disposal or return it to the beginning of the treatment process; and

(H) Replace and/or clean the filter media used in dewatering devices when the pressure differential equals or exceeds the manufacturer's specifications.

[11 Miss. Admin. Code Pt. 6, R. 1]

T-12 Flocculant Application:

Flocculants, meeting the criteria contained in ACT8 and used in accordance with manufacturer's instructions, may be incorporated as part of an overall storm water management system. If flocculant application is proposed, the SWPPP must list the proposed flocculants to be used, describe the method, frequency and location of introduction, and identify the location of BMPs where flocculated material will settle. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT5 (continued):**Narrative Requirements:**

Condition No.	Condition
T-13	Prepare Scaled Site Map(s): The owner or operator shall prepare a scaled site map showing: (1) Boundaries of property and proposed construction activities, noting any phasing of construction activities, (2) Original and proposed contours (if feasible), with steep slopes identified, (3) North arrow, (4) Drainage pattern arrows, (5) Location of sensitive areas, such as wetlands, perennial streams and adjacent receiving water bodies (if the receiving waterbody is not depicted on the map, the name and direction shall be listed in text form on the map), (6) Location of any storm drain inlets and any receiving MS4, (7) All erosion and sediment controls (vegetative and structural), (8) Any post-construction control measures, and (9) Location of housekeeping practices. (10) Location of construction entrance, equipment maintenance and repair areas, concrete washout area, waste management area, laydown area, and material and chemical storage areas. (11) Location and size of the buffer zones. If flocculant application is proposed, the location(s) of the following items shall be marked and labeled on the site map. (1) Flocculant introduction point(s), and (2) BMPs where flocculated material will settle.
T-14	Implementation Sequence: The SWPPP shall outline an implementation sequence (including any phasing of construction activities), which coordinates the timing of all land-disturbing activities together with the necessary erosion and sedimentation control measures planned for the project. [11 Miss. Admin. Code Pt. 6, R. 1]

Narrative Requirements:

Condition No.	Condition
T-15	Implementation of Controls: The SWPPP shall require the owner or operator, in disturbing an area, to implement controls as needed to prevent erosion and adverse impacts to waters of the State. [11 Miss. Admin. Code Pt. 6, R. 1]
T-16	Maintenance and Weekly Inspections: The SWPPP shall describe procedures to maintain vegetation, erosion and sediment controls and other protective measures. Procedures shall provide that all controls and outfalls/discharge points are inspected after rain events that produce a discharge and at least weekly for a minimum of four inspections per month in accordance with ACT6, S-5. Any poorly functioning erosion controls or sediment controls, non-compliant discharges, or any other deficiencies observed during the inspections required under this permit shall be corrected as soon as possible, but not to exceed 24 hours of the inspection unless prevented by unsafe weather conditions as documented on the inspection form. In the event of an unanticipated breach of a sediment basin/pond, temporary containment measures shall be taken within 24 hours after the inspection. Permanent corrective measures shall be implemented within five (5) days of the inspection; however, if permanent corrective measures cannot be implemented within the timeframes provided herein the owner or operator shall contact MDEQ. [11 Miss. Admin. Code Pt. 6, R. 1]
T-17	Non-Storm Water Discharge Management: The SWPPP must identify all allowable sources of non-storm water discharges listed in ACT2, T-2, except for flows from actual fire-fighting activities, which are combined with storm water discharges associated with large construction activity. Non-storm water discharges should be eliminated or reduced to the extent feasible. Wash waters must be treated in a sediment basin or alternate control that provides equivalent or better treatment prior to discharge. The SWPPP must identify and ensure the implementation of appropriate Best Management Practices (BMPs) for the non-storm water component of the discharge. The Permit Board staff will review the above discharges on a case-by-case basis and may require the coverage recipient to apply for and obtain either an individual or an alternative general NPDES permit as provided in ACT3, S-2. [11 Miss. Admin. Code Pt. 6, R. 1]
T-18	Final Stabilization: The SWPPP shall describe procedures to achieve final stabilization (See Definitions) of all disturbed areas of the project site. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT5 (continued):**Narrative Requirements:**

Condition No.	Condition
T-19	Example Storm Water Pollution Prevention Plans (SWPPPs): Example SWPPPs are included in the Mississippi Storm Water Pollution Prevention Plan Guidance Manual for Construction Activities as well as the MDEQ Registration Form for Individual Residential Lots The Mississippi Storm Water Pollution Prevention Plan Guidance Manual for Construction Activities is also available online at: www.mdeq.ms.gov/construction-stormwater/ The MDEQ Registration Form for Individual Residential Lots is in the Large Construction Forms Package, which is available online at: www.mdeq.ms.gov/construction-stormwater/ US EPA also lists example SWPPPs on their website at: http://cfpub.epa.gov/npdes/stormwater/swppp.cfm#model. [11 Miss. Admin. Code Pt. 6, R. 1]
T-20	STAFF TRAINING REQUIREMENTS Each operator, or group of multiple operators, must assemble a “stormwater team” to carry out compliance activities associated with the requirements in this permit. Prior to the commencement of construction activities, the permittee must ensure that the following personnel on the stormwater team understand the requirements of this permit and their specific responsibilities with respect to those requirements: (1) Personnel who are responsible for the design, installation, maintenance, and/or repair of stormwater controls (including pollution prevention controls); (2) Personnel responsible for the application and storage of treatment chemicals (if applicable) (3) Personnel who are responsible for conducting inspections as required in ACT6, S-5; and (4) Personnel who are responsible for taking corrective actions as required in ACT6, S-2. The permittee is responsible for ensuring that all activities on the site comply with the requirements of this permit. The permittee is not required to provide or document formal training for subcontractors or other outside service providers, but the permittee must ensure that such personnel understand any requirements of this permit that may be affected by the work they are subcontracted to perform. At a minimum, members of the stormwater team must be trained to understand the following if related to the scope of their job duties (e.g., only personnel responsible for conducting inspections need to understand how to conduct inspections): The permit deadlines associated with installation, maintenance, and removal of stormwater controls and with stabilization;

Narrative Requirements:

Condition No.	Condition
	The location of all stormwater controls on the site required by this permit and how they are to be maintained; The proper procedures to follow with respect to the permit's pollution prevention requirements; and When and how to conduct inspections, record applicable findings, and take corrective actions. Each member of the stormwater team must have easy access to an electronic or paper copy of applicable portions of this permit, the most updated copy of the SWPPP, and other relevant documents or information that must be kept with the SWPPP.
T-21	STAFF TRAINING DOCUMENTATION Staff Training conducted to meet the requirements of this ACT shall be documented. Training records shall include employee's name, date of training, brief content/nature of training, and the employee's signature acknowledging training was received. Staff training associated with this permit may be documented on the Employee Training Log that is provided on the MDEQ website at www.mdeq.ms.gov/construction-stormwater/. The permittee may use an alternative form to record this information, so long as it includes all of the information on the above referenced form. Employee training documentation shall be maintained on-site with the SWPPP and made available to MDEQ personnel for inspection upon request.

ACT6 (LCGP) Implementation and Inspection Requirements:**Submittal/Action Requirements:**

Condition No.	Condition
S-1	IMPLEMENTATION REQUIREMENTS: The coverage recipient shall: (1) Implement the site-specific SWPPP. Failure to implement the SWPPP is a violation of permit requirements. (2) Install structural practices as described in ACT5, T-6 in accordance with the site-specific SWPPP. (3) Retain a copy of the SWPPP at the permitted site, and, if feasible, post a copy of the NOI onsite in a location available to the public (e.g., construction entrance, trailer, or model home). A copy of the SWPPP shall be made available to state or local inspectors upon request for review at the time of an on-site inspection. In cases where there is no office or shelter to maintain documents onsite, the SWPPP can be kept locally available (i.e., able to be produced within an hour of being requested by a state or local inspector). (4) Implement the following pre-construction activities: (A) Mark off areas of "disturbance", "no disturbance" and "sensitive areas" (e.g., delineate and clearly flag of mark off areas such as steep slopes, highly erodible soils or other sensitive areas), (B) Preserve native topsoil on the site to the extent feasible, and (C) Limit construction stream crossings to the minimum necessary to provide access for the construction project. (5) Ensure that appropriate Best Management Practices (BMPs) are in place upon commencement of construction activities (see Definitions). (6) Amend the SWPPP if notified at any time by the Executive Director of the MDEQ that the SWPPP does not meet the minimum requirements. Coverage recipient shall certify in writing to the Executive Director that the requested changes have been made. Unless otherwise provided, the requested changes shall be made within fifteen (15) days. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT6 (continued):**Submittal/Action Requirements:**

Condition No.	Condition
S-2	IMPLEMENTATION REQUIREMENTS (continued): (7) Amend the SWPPP whenever there is a change in design, construction, operation, or maintenance that may potentially affect the discharge of pollutants to waters of the State; or the SWPPP proves to be ineffective in controlling storm water pollutants. The amended SWPPP shall be submitted within thirty (30) days of amendment. Coverage recipients shall submit to MDEQ the Major Modification Form (see Large Construction Forms Package) for subsequent phases, expansions and modifications of subdivision development that are proposed but were not included in the original SWPPP. (8) Install needed erosion controls even if they may be located in the way of subsequent activities, such as utility installation, grading or construction. It shall not be an acceptable defense that controls were not installed because subsequent activities would require their replacement or cause their destruction. (9) Install additional and/or alternative erosion and sediment controls when existing controls prove to be ineffective in preventing sediment from leaving the site. (10) Comply with applicable State or local waste disposal, sanitary sewer or septic system regulations. [11 Miss. Admin. Code Pt. 6, R. 1]
S-3	IMPLEMENTATION REQUIREMENTS (continued): (11) Erosion and sediment controls shall be maintained at all times. Except for sediment basins, all accumulated sediment shall be removed from structural controls when sediment deposits reach one-third to one-half the height of the control. For sediment basins, accumulated sediment shall be removed when the capacity has been reduced by 50%. All removed sediment deposits shall be properly disposed of in accordance with the approved SWPPP. Non-functioning controls shall be repaired, replaced or supplemented with functional controls within twenty-four (24) hours of discovery or as soon as field conditions allow. (12) If, after coverage issuance, a specific wasteload allocation is established that would apply to the facility's discharge, the facility must implement steps necessary to meet that allocation. [11 Miss. Admin. Code Pt. 6, R. 1]
S-4	COMPLIANCE WITH LOCAL STORM WATER ORDINANCES: (1) The SWPPP shall be in compliance with all local storm water ordinances. (2) When storm water discharges into an MS4 (municipal separate storm sewer system), the owner or operator shall make the SWPPP available to the local authority and/or allow site access, upon request. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT6 (continued):**Submittal/Action Requirements:**

Condition No.	Condition
S-5	INSPECTION REQUIREMENTS: Inspection of all receiving streams (if feasible), outfalls, erosion and sediment controls and other SWPPP requirements shall be performed during permit coverage using a copy of the form provided in the Large Construction Forms Package (or equivalent form), and inspections shall be performed by qualified personnel (see Definitions): (1) At least weekly for a minimum of four inspections per month; and (2) As often as is necessary to ensure that appropriate erosion and sediment controls have been properly constructed and maintained and to determine if additional or alternative control measures are required. Before conducting the site inspection, the inspector should review Chapter 4, Inspector's Checklist and Troubleshooting Chart found in MDEQ's Field Manual for Erosion and Sediment Control on Construction Sites in Mississippi. MDEQ strongly recommends that coverage recipients perform a "walk through" inspection of the construction site daily to ensure controls are in place and will function properly. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT7 (LCGP) Limitation Requirements:

Limitation Requirements:

Condition No.	Parameter	Condition
L-1		NON-NUMERIC LIMITATION REQUIREMENTS Storm water discharge shall be free from: (1) Debris, oil, scum, and other floating materials other than in trace amounts, (2) Eroded soils and other materials that will settle to form objectionable deposits in receiving waters, (3) Suspended solids, turbidity and color at levels inconsistent with the receiving waters, (4) Chemicals in concentrations that would cause violation of State Water Quality Criteria in the receiving waters. [11 Miss. Admin. Code Pt. 6, Ch. 2, R. 1]

ACT8 (LCGP) Application of Flocculants:**Narrative Requirements:**

Condition No.	Condition
T-1	Coverage recipients may need to supplement conventional storm water management systems with flocculants to meet state water quality standards. Flocculants meeting the criteria listed in (1) and (2) below and used in accordance with manufacturer's instructions are approved by this general permit. Any flocculant application, which deviates from the criteria specified below, must receive written approval from MDEQ prior to being implemented. Requests for approval must be in writing and shall describe the deviation, explain the justification for the deviation and provide supporting documentation demonstrating that such deviation will achieve equivalent performance to the criteria listed below. A SDS (Safety Data Sheet) of the flocculant shall be included with the request. The request shall include the dosage of the flocculant that will be used. Such requests may be submitted with the LCNOI or under separate cover to the address listed on the LCNOI. (1) Polymer flocculants for treating turbidity in construction site storm water discharges must meet the following minimum criteria. (A) Only anionic Polyacrylamide (PAM) polymer, (B) Polymer shall contain less than 0.05% free acrylamide, (C) Polymer shall be non-toxic to fish and other aquatic organisms, and (D) Polymer shall be selected for site-specific soil conditions (i.e., jar test). (2) Systems utilizing polymer flocculants to treat turbidity from construction site storm water discharges must meet the following minimum criteria. (A) Polymer shall be introduced through turbulent mixing into the storm water upstream of sedimentation BMPs, (B) Sedimentation basin shall be constructed in accordance with the criteria specified in ACT5, T-5 (2)(A), (C) Polymer shall be applied in accordance with manufacturer's instructions, and (D) There shall be no discharge of un-dissolved polymer, clumps of polymer and/or unsettled flocculant material. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT9 (LCGP) Record Keeping and Reporting Requirements:**Record-Keeping Requirements:**

Condition No.	Condition
R-1	RETENTION OF RECORDS: All records, reports, forms and information resulting from activities required by this permit shall be retained for a period of at least three (3) years from the date that the document(s) was generated. Any documents required by this permit may be kept electronically but must be readily available during site inspection or upon request. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT9 (continued):**Submittal/Action Requirements:**

Condition	
No.	Condition

Submittal/Action Requirements:**S-1 SUSPENSION OF WEEKLY INSPECTIONS AND MONTHLY RECORD KEEPING:**

Coverage recipients under this general permit may suspend weekly inspection and monthly record keeping requirements, if the coverage recipient certifies that:

- (1) Land-disturbing activities have temporarily ceased,
- (2) No further land-disturbing activities are planned for a period of at least six (6) months,
- (3) Areas that have been disturbed meet the definition of "final stabilization" (see Definitions), with no active erosion, and
- (4) Vegetative cover has been established.

Color photographs representative of the site must be submitted with the Inspection Suspension Form provided in the Large Construction Forms Package. The coverage recipient shall notify the MDEQ once construction activities are resumed and the weekly inspections shall commence immediately and as required in ACT6, S-5. The coverage recipient is still responsible for all permit conditions during the suspension period and nothing in this condition shall limit the rights of the MDEQ to take enforcement or other actions against the coverage recipient. [11 Miss. Admin. Code Pt. 6, R. 1]

S-2 The inspections described in ACT7, S-5 must be documented on copies of the Monthly Inspection Report and Certification Form provided in the Large Construction Forms Package (or equivalent form) and be kept with the SWPPP.

Submittals of the MDEQ Registration Form for residential lots are required. It is the responsibility of both the owner or developer (seller) and the new owner or operator (purchaser) to maintain a copy of the MDEQ Registration Form. The new owner or operator must maintain a copy of the MDEQ Registration Form at the site. In cases where there is no office or shelter to maintain documents onsite, the Registration Form can be kept locally available (i.e., able to be produced within an hour of being requested by state or local inspectors). [11 Miss. Admin. Code Pt. 6, R. 1]

ACT10 (LCGP) Termination of Permit Coverage:**Submittal/Action Requirements:**

Condition No.	Condition
S-1	Within thirty (30) days of final stabilization (see Definition of Final Stabilization (1)) for a covered project, a completed Request for Termination (RFT) of Coverage form (provided in the Large Construction Forms Package) and colored photographs of the stabilized site shall be submitted to the Permit Board. Upon receiving the completed RFT, the MDEQ staff may inspect the site. If no sediment and erosion control problems are identified and adequate permanent controls are established, the owner or operator will receive a termination letter. Coverage is not terminated until notified in writing by MDEQ. Failing to submit a RFT is a violation of permit conditions.

The coverage recipient of a "larger common plan of development or sale" must submit a RFT within thirty (30) days after the following conditions are met:

- (1) Final stabilization (see Definition of Final Stabilization (2)) has been achieved on all portions of the site for which the coverage recipient is responsible, and
- (2) Other owner(s) or operator(s) have assumed control (by completing a LCNOI or MDEQ Registration Form) over all areas of the site that have not achieved final stabilization.

The coverage recipient of a residential "larger common plan of development or sale" must submit a copy of the MDEQ Registration Form for each lot sold with the RFT.

Residential lot owners or operators that have completed the MDEQ Registration Forms are not required to submit a RFT, unless specifically requested by the MDEQ staff. The lot permit coverage is considered terminated upon "successful completion of all permanent erosion and sediment controls" (see Definitions).

Beginning December 21, 2025, the RFT must be submitted electronically as required by 40 CFR 127.16. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT11 (LCGP) Standard Requirements Applicable To All Water Permits:**Narrative Requirements:**

Condition No.	Condition
T-1	DUTY TO COMPLY: The coverage recipient must comply with all conditions of this permit. Any permit noncompliance constitutes a violation and is grounds for enforcement action; for coverage termination, revocation and reissuance, or modifications; or denial of a renewal application. [11 Miss. Admin. Code Pt. 6, R. 1]
T-2	DUTY TO MITIGATE: The owner or operator shall take all reasonable steps to minimize or prevent any discharge in violation of this permit, which is likely to adversely affect human health or the environment. [11 Miss. Admin. Code Pt. 6, R. 1]
T-3	DUTY TO PROVIDE INFORMATION: The owner or operator shall furnish to the Permit Board, within a reasonable time, any information that the Permit Board may request to determine compliance with this permit. [11 Miss. Admin. Code Pt. 6, R. 1]
T-4	PROPERTY RIGHTS: The issuance of this permit does not convey any property rights of any sort, nor any exclusive privileges, nor does it authorize any injury to private property nor any invasion of personal rights, nor any infringement of Federal, State or local laws or regulations. [11 Miss. Admin. Code Pt. 6, R. 1]
T-5	SEVERABILITY: The provisions of this permit are severable. If any provision of this permit, or the application of any provision of this permit to any circumstances, is challenged or held invalid, the validity of the remaining permit provisions and/or portions thereof or their application to other persons or sets of circumstances, shall not be affected thereby. [11 Miss. Admin. Code Pt. 6, R. 1]
T-6	OIL AND HAZARDOUS SUBSTANCE LIABILITY: Nothing in this permit shall relieve the owner or operator from responsibilities, liabilities, or penalties under Section 311 of the CWA (33 U.S.C. Section 1321). [11 Miss. Admin. Code Pt. 6, R. 1]

ACT11 (continued):**Narrative Requirements:**

Condition No.	Condition
T-7	SIGNATORY REQUIREMENTS: All LCNOIs and requests for recoverage shall be signed as follows: (1) For a corporation by a responsible corporate officer. For this permit, a responsible corporate officer means: (A) A president, secretary, treasurer, or vice-president of the corporation in charge of a principal business function, or any other person who performs similar policy or decision-making functions for the corporation; or (B) The manager of one or more manufacturing, production or operating facilities, provided, the manager is authorized to make management decisions which govern the operation of the regulated facility including having the explicit or implicit duty of making major capital investment recommendations, and initiating and directing other comprehensive measures to assure long term environmental compliance with environmental laws and regulations; the manager can ensure that the necessary systems are established or actions taken to gather complete and accurate information for permit application requirements; and where authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures; Note: MDEQ does not require specific assignments or delegations of authority to responsible corporate officers identified in paragraph (1)(A) above. The Department will presume that these responsible corporate officers have the requisite authority to sign permit applications unless the corporation has notified the Permit Board to the contrary. Corporate procedures governing authority to sign permit applications may provide for assignment or delegation to applicable corporate positions under paragraph (1)(B) above rather than to specific individuals. (2) For a partnership or sole proprietorship by a general partner or the proprietor, respectively; or (3) For a municipal, State, Federal, or other public agency by either a principal executive officer or ranking elected official. For purposes of this section, a principal executive officer of a Federal agency includes: (A) The chief executive officer of the agency, or (B) A senior executive officer having responsibility for the overall operations of a principal geographic unit of the agency. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT11 (continued):**Narrative Requirements:**

Condition No.	Condition
T-8	DULY AUTHORIZED REPRESENTATIVE: All SWPPPs, reports required by this permit, certifications and other information requested by the Permit Board shall be signed by a person described in T-7 above, or by a duly authorized representative of that person. A person is a duly authorized representative when: (1) The authorization is made in writing and submitted to the Permit Board by a person described in T-7 above. (2) The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated activity, such as: manager, operator of a well or well field, superintendent, person of equivalent responsibility, or an individual or position having overall responsibility for environmental matters for the company. (A duly authorized representative may be either a specified individual or position). [11 Miss. Admin. Code Pt. 6, R. 1]
T-9	CHANGES TO AUTHORIZATION: If an authorization is no longer accurate because a different individual or position has permit responsibility, a new authorization satisfying the requirements of T-7 and T-8 above, must be submitted to the Permit Board prior to or together with any reports, information or applications signed by the representative. [11 Miss. Admin. Code Pt. 6, R. 1]
T-10	CERTIFICATION: Any person signing documents under this section shall make the following certification: "I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations." [11 Miss. Admin. Code Pt. 6, R. 1]

ACT11 (continued):**Narrative Requirements:**

Condition No.	Condition
T-11	PROPER OPERATION AND MAINTENANCE: The coverage recipient shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the coverage recipient to achieve compliance with the conditions of this permit including the Storm Water Pollution Prevention Plan. Proper operation and maintenance includes adequate laboratory controls with appropriate quality assurance procedures and requires the operation of backup or auxiliary facilities when necessary to achieve compliance with permit conditions. [11 Miss. Admin. Code Pt. 6, R. 1]
T-12	MONITORING AND RECORDS: (1) Monitoring. Samples and measurements shall be representative of the monitored activity and must be conducted according to test procedures approved under 40 CFR Part 136. (2) Retention of Records. The owner or operator shall retain records of all required monitoring information for a period of at least three years from the date of the measurement, report, or application. This information includes all calibration and maintenance records, all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by this permit, and records of all data used to complete the Notice of Intent to be covered by this permit. This period may be extended by request of the Permit Board or its designee. Any documents required by this permit may be kept electronically but must be readily available during site inspection or upon request. (3) Record Contents. Records of monitoring information shall include: (A) The date, exact location, and time of sampling or measurements, (B) The initials or names of the individuals who performed the sampling or measurements, (C) The date(s) and time(s) analyses were performed, (D) The initials or names of the individuals who performed the analyses, (E) References and written procedures, when available, for the analytical techniques or methods used, and (F) The results of such analyses, including the bench sheets, instrument readouts, computer disks or tapes, etc., used to determine these results. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT11 (continued):**Narrative Requirements:**

Condition No.	Condition
T-13	BYPASS PROHIBITION: Bypass (see 40 CFR 122.41(m)) is prohibited and enforcement action may be taken against an coverage recipient for a bypass, unless: a) the bypass was unavoidable to prevent loss of life, personal injury, or severe property damage; b) There were no feasible alternatives to the bypass, such as the use of auxiliary treatment facilities, retention of untreated wastes, or maintenance during normal periods of equipment downtime (this condition is not satisfied if the coverage recipient should, in the exercise of reasonable engineering judgment, have installed adequate backup equipment to prevent a bypass which occurred during normal periods of equipment downtime or preventive maintenance); and c) The owner or operator submitted notices per T-17 of this ACT. [11 Miss. Admin. Code Pt. 6, R. 1]
T-14	UPSET CONDITIONS: An upset (see 40 CFR 122.41(n)) constitutes an affirmative defense to an action brought for noncompliance with technology-based permit limitations if a coverage recipient shall demonstrate, through properly signed, contemporaneous operating logs, or other relevant evidence, that: (1) An upset occurred and the coverage recipient can identify the specific cause(s) of the upset, (2) The permitted facility was at the time of the upset being properly operated, (3) The coverage recipient submitted notices per T-17 of this ACT, and (4) The coverage recipient took remedial measures as required under T-2 of this ACT. In any enforcement proceeding, the coverage recipient has the burden of proof that an upset occurred. No determination made during administrative review of claims that noncompliance was caused by upset, and before an action for noncompliance is initiated, will be considered a final administrative action subject to judicial review. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT11 (continued):**Narrative Requirements:**

Condition No.	Condition
T-15	INSPECTION AND ENTRY: The coverage recipient shall allow the Permit Board staff or an authorized representative, upon the presentation of credentials and other documents as may be required by law, to: (1) Enter upon the owner or operator's premises where a regulated activity is located or conducted or where records must be kept under the conditions of this permit; (2) Have access to and copy at reasonable times any records that must be kept under the conditions of this permit; (3) Inspect at reasonable times any facilities or equipment (including monitoring and control equipment), practices, or operations regulated or required under this permit; and (4) Sample or monitor at reasonable times, for the purposes of assuring permit compliance or as otherwise authorized by the Clean Water Act, any substances or parameters at any location. [11 Miss. Admin. Code Pt. 6, R. 1]
T-16	PERMIT ACTIONS: This permit may be modified, revoked and reissued, or terminated for cause. A request by the coverage recipient for permit or coverage modification, revocation and reissuance, or termination, or a certification of planned changes or anticipated noncompliance does not stay any permit condition. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT11 (continued):**Narrative Requirements:**

Condition No.	Condition
T-17	NONCOMPLIANCE REPORTING: (1) Anticipated Noncompliance. The coverage recipient shall give at least ten (10) days advance notice, if possible, before any planned noncompliance with permit requirements. Giving notice of planned or anticipated noncompliance does not immunize the coverage recipient from enforcement action for that noncompliance. (2) Unanticipated Noncompliance. The coverage recipient shall notify the MDEQ orally within twenty-four (24) hours from the time he or she becomes aware of unanticipated noncompliance, which may endanger health or the environment. A written report shall be provided to the MDEQ within five (5) working days of the time he or she becomes aware of the circumstances leading to the unanticipated noncompliance. The report shall describe the cause, the exact dates and times, steps taken or planned to reduce, eliminate, or prevent reoccurrence and, if the noncompliance has not ceased, the anticipated time for correction. MDEQ may waive the written report on a case-by-case basis, if the oral report is received within 24 hours. [11 Miss. Admin. Code Pt. 6, R. 1]
T-18	REOPENER CLAUSE: If there is evidence indicating potential or realized impacts on water quality due to large construction activities covered by this permit, the coverage recipient may be required to obtain individual permit or an alternative general permit in accordance with ACT3, S-2 or the permit may be modified to include different limitations and/or requirements. [11 Miss. Admin. Code Pt. 6, R. 1]
T-19	PERMIT MODIFICATION: Permit modification or revocation will be conducted according to 40 CFR 122.62, 122.63, 122.64 and 124.5. [11 Miss. Admin. Code Pt. 6, R. 1]
T-20	TRANSFERS: Coverage under this permit is not transferable to any person except after notice to and approval by the Permit Board. The Permit Board may require the coverage recipient to obtain another NPDES permit as stated in ACT3, S-2. Transfer of coverage requests shall be submitted to the Permit Board using the form provided in the Large Construction Forms Package. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT11 (continued):**Narrative Requirements:**

Condition No.	Condition
T-21	CONTINUATION OF EXPIRED GENERAL PERMIT: If this permit is not reissued prior to the expiration date, it will be administratively continued and remain in force and effect. Permit coverage will remain until the earliest of: (1) Recoverage under the reissued general permit; (2) Submittal of a Request for Termination and receipt of written concurrence; (3) Issuance of an individual permit for the project's discharge; or (4) A formal permit decision by the Permit Board to not reissue the general permit, at which time the coverage recipient must seek coverage under an alternative general permit or an individual permit. [11 Miss. Admin. Code Pt. 6, R. 1]
T-22	FALSIFYING REPORTS: Any coverage recipient who falsifies any written report required by or in response to a permit condition shall be deemed to have violated a permit condition and shall be subject to the penalties provided for a violation of a permit condition pursuant to Section 49-17-43 of the Mississippi Water Pollution Control Law (Mississippi Code Ann. Sections 49-17-1 et seq.). [11 Miss. Admin. Code Pt. 6, R. 1]
T-23	CIVIL AND CRIMINAL LIABILITY: (1) Any person who violates a term, condition or schedule of compliance contained within this permit or the Mississippi Air and Water Pollution Control Law is subject to the actions defined by the Mississippi Air and Water Pollution Control Law. (2) Except as provided in permit conditions on "Bypassing" and "Upsets", nothing in this permit shall be construed to relieve the coverage recipient from civil or criminal penalties for noncompliance. (3) It shall not be the defense of the coverage recipient in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT12 (LCGP) Definitions:**Narrative Requirements:**

Condition No.	Condition
T-1	BEST MANAGEMENT PRACTICES (BMPs) means schedules of activities, prohibitions of practices, maintenance procedures, and other management practices to prevent or reduce the discharge of pollutants to waters of the United States. BMPs also include treatment requirements, operating procedures, and practices to control plant site runoff, spillage or leaks, sludge or waste disposal, or drainage from raw material storage. [11 Miss. Admin. Code Pt. 6, R. 1]
T-2	BUFFER ZONE, as used in this permit, means a strip of dense undisturbed perennial vegetation, either original or reestablished, that borders perennial streams and rivers, ponds and lakes and wetlands. Buffer zones are established for the purposes of slowing water runoff, enhancing water infiltration, and minimizing the risk of any potential nutrients or pollutants from leaving the upland area and reaching surface waters. Buffer zones are most effective when storm water runoff is flowing into and through the buffer zone as shallow sheet flow, rather than in concentrated form such as in channels, gullies, or wet weather conveyances. Therefore, it is critical that the design of any development include management practices, to the maximum extent practical, that will result in storm water runoff flowing into and through the buffer zone as shallow sheet flow. [11 Miss. Admin. Code Pt. 6, R. 1]
T-3	CFR means the Code of Federal Regulations. [11 Miss. Admin. Code Pt. 6, R. 1]
T-4	CLEAN WATER ACT (CWA) refers to the Federal Water Pollution Control Act, 33 U.S.C. section 1251 et seq. [11 Miss. Admin. Code Pt. 6, R. 1]
T-5	COMMENCEMENT OF CONSTRUCTION ACTIVITIES means the initial disturbance of soils associated with clearing, grading, grubbing, or excavating activities or other construction-related activities. [11 Miss. Admin. Code Pt. 6, R. 1]
T-6	COMMISSION means the Mississippi Commission on Environmental Quality. [11 Miss. Admin. Code Pt. 6, R. 1]
T-7	COMPACTION means the process by which the soil grains are rearranged to decrease void space and bring the grains into closer contact with one another and thereby increase the weight of solid material per cubic foot. [11 Miss. Admin. Code Pt. 6, R. 1]
T-8	CONSTRUCTION ACTIVITY as used in this permit, includes construction activity as defined in 40 CFR part 122.26(b)(14)(x). This includes a disturbance to the land that results in the change in topography, existing soil cover (both vegetative and non-vegetative), or the existing topography that may result in accelerated storm water runoff, leading to soil erosion and movement of sediment into surface waters or drainage systems. Examples of construction activity may include clearing, grading, grubbing, filling and excavating. Construction activity does not include routine maintenance that is performed to maintain the original line and grade, hydraulic capacity, or original purpose of the site. [11 Miss. Admin. Code Pt. 6, R. 1]
T-9	CONSTRUCTION SUPPORT ACTIVITY a construction-related activity that specifically supports the construction activity and involves earth disturbance or pollutant-generating activities of its own, and can include activities associated with concrete or asphalt batch plants, equipment staging yards, materials storage areas, excavated material disposal areas, and borrow areas. [11 Miss. Admin. Code Pt. 6, R. 1]

ACT12 (LCGP) Definitions:
Narrative Requirements:

Condition No.	Condition
T-10	CONTROL MEASURE as used in this permit, refers to any Best Management Practice or other method used to prevent or reduce the discharge of pollutants to waters of the United States. [11 Miss. Admin. Code Pt. 6, R. 1]
T-11	DAILY DISCHARGE means the "discharge of a pollutant" measured during a calendar day or any 24-hour period that reasonably represents the calendar day for purposes of sampling. For pollutants with limitations expressed in units of mass, the "daily discharge" is calculated as the total mass of the pollutant discharged over the day. For pollutants with limitations expressed in other units of measurements, the "daily average" is calculated as the average measurement of the discharge of the pollutant over the day. [11 Miss. Admin. Code Pt. 6, R. 1]
T-12	DEWATERING means the act of draining rainwater and/or ground water from building foundations, vaults, and trenches. [11 Miss. Admin. Code Pt. 6, R. 1]
T-13	DROUGHT-STRICKEN AREA means for the purposes of this permit an area in which the National Oceanic and Atmospheric Administration's U.S. Seasonal Drought Outlook indicates for the period during which the construction will occur that any of the following conditions are likely: (1) "Drought to persist or intensify", (2) "Drought ongoing, some improvement", (3) "Drought likely to improve, impacts ease", or (4) "Drought development likely". See http://www.cpc.ncep.noaa.gov/products/expert_assessment/season_drought.gif . [11 Miss. Admin. Code Pt. 6, R. 1]
T-14	EXECUTIVE DIRECTOR means the Executive Director of the Department of Environmental Quality. [11 Miss. Admin. Code Pt. 6, R. 1]
T-15	FACILITY or ACTIVITY means any NPDES "point source" or any other facility or activity (including land or appurtenances thereto) that is subject to regulation under the NPDES program. [11 Miss. Admin. Code Pt. 6, R. 1]
T-16	FINAL STABILIZATION means that either: (1) All soil disturbing activities at the site have been completed, and that a uniform perennial vegetative cover with a density of at least 70% for the area has been established or equivalent measures (e.g., concrete or asphalt paving, rip rap, etc.) have been employed; or (2) For individual lots part of a larger common plan of development or sale in residential or commercial developments, that either: (A) The coverage recipient has completed final stabilization as specified in (1) above, or (B) The coverage recipient has established temporary stabilization before another property owner assumes operational control for the property AND the coverage recipient for the larger common plan of development has provided the appropriate Notice of Intent or Registration form, the appropriate Construction General Permit, and guidance documents to the new property owner and the new owner assumes control by completing the appropriate NOI or Registration Form.

ACT12 (continued):**Narrative Requirements:**

Condition No.	Condition
	In arid, semiarid, and drought-stricken areas where initiating vegetative stabilization measures immediately is infeasible, alternative stabilization measures must be employed if specified by the permitting authority. [11 Miss. Admin. Code Pt. 6, R. 1]
T-17	INFEASIBLE means not technologically possible, or not economically practicable and achievable in light of best industry practices. [11 Miss. Admin. Code Pt. 6, R. 1]
T-18	LARGE CONSTRUCTION ACTIVITY includes clearing, grading, grubbing, and excavating resulting in a land disturbance that will disturb equal to or greater than five (5) acres of land or will disturb less than five (5) acres of total land area but is part of a larger common plan of development or sale that will ultimately disturb equal to or greater than five (5) acres. [11 Miss. Admin. Code Pt. 6, R. 1]
T-19	LARGER COMMON PLAN OF DEVELOPMENT OR SALE means a contiguous area where multiple separate and distinct construction activities are occurring under one plan. The plan in a common plan of development or sale is broadly defined as any announcement or piece of documentation (including a sign, public notice or hearing, sales pitch, advertisement, drawing, permit application, zoning request, computer design, etc.) or physical demarcation (including boundary signs, lot stakes, surveyor markings, etc.), indicating that construction activities may occur on a specific plot. [11 Miss. Admin. Code Pt. 6, R. 1]
T-20	LINEAR PROJECT includes the construction of roads, bridges, conduits, substructures, pipelines, sewer lines, towers, poles, cables, wires, connectors, switching, regulating and transforming equipment and associated ancillary facilities in a long, narrow area. [11 Miss. Admin. Code Pt. 6, R. 1]
T-21	MUNICIPAL SEPARATE STORM SEWER SYSTEM (MS4) means a conveyance or system of conveyances (including roads with drainage systems, municipal streets, catch basins, curbs, gutters, ditches, man-made channels, or storm drains): (i) Owned or operated by a State, city, town, borough, county, parish, district, association, or other public body (created by or pursuant to State law) having jurisdiction over disposal of sewage, industrial wastes, storm water, or other wastes, including special districts under State law such as a sewer district, flood control district or drainage district, or similar entity, or an Indian tribe or an authorized Indian tribal organization, or a designated and approved management agency under section 208 of the CWA that discharges to waters of the United States, (ii) Designed or used for collecting or conveying storm water, (iii) Which is not a combined sewer, and (iv) Which is not part of a Publicly Owned Treatment Works (POTW). [11 Miss. Admin. Code Pt. 6, R. 1]
T-22	NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES) means the regulations under the Clean Water Act that prohibits discharge of pollutants into waters of the United States unless a special permit is issued. [11 Miss. Admin. Code Pt. 6, R. 1]
T-23	NOI is an acronym for "Notice of Intent" to be covered by this permit and is the mechanism used to apply for coverage under a general permit. [11 Miss. Admin. Code Pt. 6, R. 1]
T-24	NORMAL WORKING HOURS, for the purpose of this permit, means the hours that personnel are typically working at the project site (e.g., daylight hours, Monday through Friday, except recognized holidays). [11 Miss. Admin. Code Pt. 6, R. 1]

ACT12 (continued):**Narrative Requirements:**

Condition No.	Condition
T-25	OWNER or OPERATOR for the purpose of this permit and in the context of storm water associated with construction activity, means any party associated with a construction project that meets either of the following two criteria: (1) The party has operational control over construction plans, specifications, and installation of BMPs including the ability to make modifications to those plans and specifications; or (2) The party has day to day operational control of those activities at a project which are necessary to ensure compliance with a storm water pollution prevention plan for the site or other permit conditions (e.g., they are authorized to direct workers at a site to carry out activities required by the SWPPP or comply with other permit conditions). This definition is provided to inform coverage recipients of MDEQ's interpretation of how the regulatory definitions of "owner or operator" and "facility or activity" are applied to discharges of storm water associated with construction activity. [11 Miss. Admin. Code Pt. 6, R. 1]
T-26	PERMIT BOARD means the Mississippi Environmental Quality Permit Board established pursuant to Miss. Code Ann. 49-17-28. [11 Miss. Admin. Code Pt. 6, R. 1]
T-27	POLLUTANT is defined at 40 CFR 122.2. A partial listing from this definition includes: dredged spoil, solid waste, sewage, garbage, sewage sludge, chemical wastes, biological materials, heat, wrecked or discarded equipment, rock, sand, sediment, silt, cellar dirt, and industrial or municipal waste. [11 Miss. Admin. Code Pt. 6, R. 1]
T-28	POLYMER FLOCCULANT, for the purpose of this permit, is a chemical that when added to storm water containing small suspended particles (e.g., fine silts and clays) causes the particles to stick together and fall out of suspension, reducing the overall turbidity of the storm water discharge. [11 Miss. Admin. Code Pt. 6, R. 1]
T-29	QUALIFIED PERSONNEL means a person knowledgeable in the principles and practice of erosion and sediment controls who possesses the skills to assess conditions at the construction site that could impact storm water quality and to assess the effectiveness of any sediment and erosion control measures selected to control the quality of storm water discharges from the construction activity. [11 Miss. Admin. Code Pt. 6, R. 1]
T-30	STATE LAW means The Mississippi Air and Water Pollution Control Law, specifically, Miss. Code Ann 49-17-1 through 49-17-43, and any subsequent amendments. [11 Miss. Admin. Code Pt. 6, R. 1]
T-31	STEEP SLOPES, as used in this permit, means slopes or grades steeper than (3:1). [11 Miss. Admin. Code Pt. 6, R. 1]


ACT12 (continued):**Narrative Requirements:**

Condition No.	Condition
T-32	STORM WATER means rainfall runoff, snowmelt runoff, and surface runoff. [11 Miss. Admin. Code Pt. 6, R. 1]
T-33	STORM WATER ASSOCIATED WITH CONSTRUCTION ACTIVITY as used in this permit, refers to a discharge of pollutants in storm water from areas where soil disturbing activities (e.g., clearing, grading, grubbing, or excavation), construction materials or equipment storage or maintenance (e.g., stock piles, borrow area, concrete truck chute wash down, fueling) are located. [11 Miss. Admin. Code Pt. 6, R. 1]
T-34	STORM WATER POLLUTION PREVENTION PLAN (SWPPP) means a plan that includes site map(s), an identification of construction/contractor activities that could cause pollutants in the storm water, and a description of measures or practices to control these pollutants. [11 Miss. Admin. Code Pt. 6, R. 1]
T-35	SUBMITTED means the document is postmarked on or before the applicable deadline, except as otherwise specified. [11 Miss. Admin. Code Pt. 6, R. 1]
T-36	SUCCESSFUL COMPLETION OF ALL PERMANENT EROSION AND SEDIMENT CONTROLS means when land disturbing construction activities have been completed and disturbed areas have been stabilized with no significant erosion occurring. [11 Miss. Admin. Code Pt. 6, R. 1]
T-37	TEMPORARY STABILIZATION means practices such as seeding, mulching and erosion control blankets or mats that are used to stabilize exposed areas in which construction activity has been temporarily suspended. [11 Miss. Admin. Code Pt. 6, R. 1]
T-38	TOPSOIL means the top layer of undisturbed soil, consisting of a high percentage of organic matter, which is conducive to plant growth. [11 Miss. Admin. Code Pt. 6, R. 1]
T-39	TOTAL MAXIMUM DAILY LOAD (TMDL) means the maximum daily amount of a pollutant that can enter a water body so that the water body will meet and continue to meet state water quality standards. [11 Miss. Admin. Code Pt. 6, R. 1]
T-40	TURBIDITY is an expression of the optical property that causes light to be scattered and absorbed rather than transmitted with no change in direction of flux level through the sample caused by suspended and colloidal matter such as clay, silt, finely divided organic and inorganic matter and plankton and other microscopic organisms. [11 Miss. Admin. Code Pt. 6, R. 1]
T-41	UPSET means an exceptional incident in which there is unintentional and temporary noncompliance with technology based permit effluent limitations because of factors beyond the reasonable control of the coverage recipient. An upset does not include noncompliance to the extent caused by operational error, improperly

ACT12 (continued):**Narrative Requirements:**

Condition No.	Condition
	designed treatment facilities, inadequate treatment facilities, lack of preventive maintenance, or careless or improper operation. [11 Miss. Admin. Code Pt. 6, R. 1]
T-42	WATERS OF THE STATE means all waters within the jurisdiction of this State, including all streams, lakes, ponds, wetlands, impounding reservoirs, marshes, watercourses, waterways, wells, springs, irrigation systems, drainage systems, and all other bodies or accumulations of water, surface and underground, natural or artificial, situated wholly or partly within or bordering upon the State, and such coastal waters as are within the jurisdiction of the State, except lakes, ponds, or other surface waters which are wholly landlocked and privately owned, and which are not regulated under the Federal Clean Water Act (33 U.S.C.1251 et seq.). [11 Miss. Admin. Code Pt. 6, R. 1]
T-43	11 Miss. Admin. Code Pt. 6, R.1 means the State of Mississippi's Wastewater Regulations for National Pollutant Discharge Elimination System (NPDES) Permits, Underground Injection Control (UIC) Permits, State Permits, Water Quality Based Effluent Limitations and Water Quality Certifications. [11 Miss. Admin. Code Pt. 6, R. 1]

- Large Construction Forms Package



MISSISSIPPI DEPARTMENT OF
ENVIRONMENTAL QUALITY

**LARGE CONSTRUCTION NOTICE OF INTENT (LCNOI)
FOR COVERAGE UNDER THE LARGE CONSTRUCTION
STORM WATER GENERAL NPDES PERMIT**

INSTRUCTIONS

The Large Construction Notice of Intent (LCNOI) is for coverage under the Large Construction General Permit for land disturbing activities of five (5) acres or greater; or for land disturbing activities, which are part of a larger common plan of development or sale that are initially less than five (5) acres but will ultimately disturb five (5) or more acres. Applicant must be the owner or operator. For construction activities, the operator is typically the prime contractor. The owner(s) of the property and the prime contractor associated with regulated construction activity on the property have joint and severable responsibility for compliance with the Large Construction Storm Water General Permit MSR10.

If the company seeking coverage is a corporation, a limited liability company, a partnership, or a business trust, attach proof of its registration with the Mississippi Secretary of State and/or its Certificate of Good Standing. This registration or Certificate of Good Standing must be dated within twelve (12) months of the date of the submittal of this coverage form. Coverage will be issued in the company name as it is registered with the Mississippi Secretary of State.

Completed LCNOIs should be filed at least thirty (30) days prior to the commencement of construction. Discharge of storm water from large construction activities without written notification of coverage is a violation of state law.

Submittals with this LCNOI must include:

- A site-specific Storm Water Pollution Prevention Plan (SWPPP) developed in accordance with ACT5 of the General Permit
- A detailed site-specific scaled drawing showing the property layout and the features outlined in ACT5 of the General Permit
- A United States Geological Survey (USGS) quadrangle map or photocopy, extending at least one-half mile beyond the facility property boundaries with the site location and outfalls outlined or highlighted. The name of the quadrangle map must be shown on all copies. Quadrangle maps can be obtained from the MDEQ, Office of Geology at 601-961-5523.

Additional submittals may include the following, if applicable:

- Appropriate Section 404 documentation from U.S. Army Corps of Engineers
- Appropriate documentation concerning future disposal of sanitary sewage and sewage collection system construction
- Appropriate documentation from the MDEQ Office of Land & Water concerning dam construction and low flow requirements
- Approval from County Utility Authority in Hancock, Harrison, Jackson, Pearl River and Stone Counties
- Antidegradation report for disturbance within Waters of the State

ALL QUESTIONS MUST BE ANSWERED (Answer "NA" if the question is not applicable)

MSR10 _____

(NUMBER TO BE ASSIGNED BY STATE)

APPLICANT IS THE:



OWNER



PRIME CONTRACTOR

OWNER CONTACT INFORMATION

OWNER CONTACT PERSON: Mr. Rodney Lincoln

OWNER COMPANY LEGAL NAME: George M. Bryan Field

OWNER STREET OR P.O. BOX: 120 Airport Road

OWNER CITY: Starkville STATE: Mississippi ZIP: 39759

OWNER PHONE #: (662) 418-5900 OWNER EMAIL: rlincoln@cityofstarkville.com

PREPARER CONTACT INFORMATION

IF NOI WAS PREPARED BY SOMEONE OTHER THAN THE APPLICANT

CONTACT PERSON: Lee Kirkpatrick, P.E.

COMPANY LEGAL NAME: Clearwater Consultants, Inc.

STREET OR P.O. BOX: 316 University Drive

CITY: Starkville STATE: Mississippi ZIP: 39759

PHONE # () (662) 323-8000 EMAIL: tlk@clearwaterconsultants.com

PRIME CONTRACTOR CONTACT INFORMATION

PRIME CONTRACTOR CONTACT PERSON: _____

PRIME CONTRACTOR COMPANY LEGAL NAME: _____

PRIME CONTRACTOR STREET OR P.O. BOX: _____

PRIME CONTRACTOR CITY: _____ STATE: _____ ZIP: _____

PRIME CONTRACTOR PHONE #: () _____ PRIME CONTRACTOR EMAIL: _____

FACILITY SITE INFORMATION

FACILITY SITE NAME: George M. Bryan Field

FACILITY SITE ADDRESS (If the physical address is not available, please indicate the nearest named road. For linear projects indicate the beginning of the project and identify all counties the project traverses.)

STREET: 120 Airport Road

CITY: Starkville STATE: Mississippi COUNTY: Oktibbeha ZIP: 39750

FACILITY SITE TRIBAL LAND ID (N/A If not applicable): N/A

LATITUDE: 33 degrees 25 minutes 19 seconds LONGITUDE: 88 degrees 50 minutes 57 seconds

LAT & LONG DATA SOURCE (GPS (Please GPS Project Entrance/Start Point) or Map Interpolation): Google Earth

TOTAL ACREAGE THAT WILL BE DISTURBED 1: 66 acres

IS THIS PART OF A LARGER COMMON PLAN OF DEVELOPMENT? YES ☐ NO ☒

IF YES, NAME OF LARGER COMMON PLAN OF DEVELOPMENT: _____
AND PERMIT COVERAGE NUMBER: MSR10_____

ESTIMATED CONSTRUCTION PROJECT START DATE: _____
YYYY-MM-DD

ESTIMATED CONSTRUCTION PROJECT END DATE: _____
YYYY-MM-DD

DESCRIPTION OF CONSTRUCTION ACTIVITY: 1000 foot runway extension

PROPOSED DESCRIPTION OF PROPERTY USE AFTER CONSTRUCTION HAS BEEN COMPLETED:
1000 foot runway extension east of George M. Bryan Field in Starkville, Mississippi

SIC Code: 4581 _____ NAICS Code 488119 _____

NEAREST NAMED RECEIVING STREAM: Tobacco Juice Creek

IS RECEIVING STREAM ON MISSISSIPPI'S 303(d) LIST OF IMPAIRED WATER BODIES? (The 303(d) list of impaired waters and TMDL stream segments may be found on MDEQ's web site: http://www.deq.state.ms.us/MDEQ.nsf/page/TWB_Total_Maximum_Daily_Load_Section) YES ☐ NO ☒

HAS A TMDL BEEN ESTABLISHED FOR THE RECEIVING STREAM SEGMENT? YES ☐ NO ☒

FOR WHICH POLLUTANT:

ARE THERE RECREATIONAL STREAMS, PRIVATE/PUBLIC PONDS OR LAKES WITHIN 1/2 MILE DOWNSTREAM OF PROJECT BOUNDARY THAT MAY BE IMPACTED BY THE CONSTRUCTION ACTIVITY? YES ☐ NO ☒

EXISTING DATA DESCRIBING THE SOIL (for linear projects please describe in SWPPP): _____

WILL FLOCCULANTS BE USED TO TREAT TURBIDITY IN STORM WATER? YES ☐ NO ☒

IF YES, INDICATE THE TYPE OF FLOCCULANT. ☐ ANIONIC POLYACRYLAMIDE (PAM)
☐ OTHER _____

IF YES, DOES THE SWPPP DESCRIBE THE METHOD OF INTRODUCTION, THE LOCATION OF INTRODUCTION AND THE LOCATION OF WHERE FLOCCULATED MATERIAL WILL SETTLE?

IS A SDS SHEET INCLUDED FOR THE FLOCCULATE? YES ☐ NO ☐

WILL THERE BE A 50 FT BUFFER BETWEEN THE PROJECT DISTURBANCE AND THE WATERS OF THE STATE? YES ☒ NO ☐

IF NOT, PROVIDE EQUIVALENT CONTROL MEASURES IN THE SWPPP.

¹ Acreage for subdivision development includes areas disturbed by construction of roads, utilities and drainage. Additionally, a housesite of at least 10,000 ft² per lot (entire lot, if smaller) shall be included in calculating acreage disturbed.

DOCUMENTATION OF COMPLIANCE WITH OTHER REGULATIONS/REQUIREMENTS

COVERAGE UNDER THIS PERMIT WILL NOT BE GRANTED UNTIL ALL OTHER REQUIRED
MDEQ PERMITS AND APPROVALS ARE SATISFACTORILY ADDRESSED

IS LCNOI FOR A FACILITY THAT WILL REQUIRE OTHER PERMITS?

YES ☐ NO ☒

IF YES, CHECK ALL THAT APPLY:

☐ AIR ☐ HAZARDOUS WASTE ☐ PRETREATMENT
☐ WATER STATE OPERATING ☐ INDIVIDUAL NPDES ☐ OTHER: _____

IS THE PROJECT REROUTING, FILLING OR CROSSING A WATER CONVEYANCE OF ANY KIND? (If yes, contact the U.S. Army Corps of Engineers' Regulatory Branch for permitting requirements.) YES ☐ NO ☒

IF THE PROJECT REQUIRES A CORPS OF ENGINEER SECTION 404 PERMIT, PROVIDE APPROPRIATE DOCUMENTATION THAT:

- The project has been approved by individual permit, or
- The work will be covered by a nationwide permit and NO NOTIFICATION to the Corps is required, or
- The work will be covered by a nationwide or general permit and NOTIFICATION to the Corps is required

IS THE PROJECT REROUTING, FILLING OR CROSSING A STATE WATER CONVEYANCE OF ANY KIND? (If yes, please provide an antidegradation report.) YES ☐ NO ☒

IS A LAKE REQUIRING THE CONSTRUCTION OF A DAM BEING PROPOSED? (If yes, provide appropriate approval documentation from MDEQ Office of Land and Water, Dam Safety.) YES ☐ NO ☒

IF THE PROJECT IS A SUBDIVISION OR A COMMERCIAL DEVELOPMENT, HOW WILL SANITARY SEWAGE BE DISPOSED? Check one of the following and attach the pertinent documents.

- ☐ Existing Municipal or Commercial System. Please attach plans and specifications for the collection system and the associated "Information Regarding Proposed Wastewater Projects" form or approval from County Utility Authority in Hancock, Harrison, Jackson, Pearl River and Stone Counties. If the plans and specifications can not be provided at the time of LCNOI submittal, MDEQ will accept written acknowledgement from official(s) responsible for wastewater collection and treatment that the flows generated from the proposed project can and will be transported and treated properly. The letter must include the estimated flow.
- ☐ Collection and Treatment System will be Constructed. Please attach a copy of the cover of the NPDES discharge permit from MDEQ or indicate the date the application was submitted to MDEQ (Date: _____.)
- ☐ Individual Onsite Wastewater Disposal Systems for Subdivisions Less than 35 Lots. Please attach a copy of the Letter of General Acceptance from the Mississippi State Department of Health or certification from a registered professional engineer that the platted lots should support individual onsite wastewater disposal systems.
- ☐ Individual Onsite Wastewater Disposal Systems for Subdivisions Greater than 35 Lots. A determination of the feasibility of installing a central sewage collection and treatment system must be made by MDEQ. A copy of the response from MDEQ concerning the feasibility study must be attached. If a central collection and wastewater system is not feasible, then please attach a copy of the Letter of General Acceptance from the State Department of Health or certification from a registered professional engineer that the platted lots should support individual onsite wastewater disposal systems.

INDICATE ANY LOCAL STORM WATER ORDINANCE (I.E. MS4) WITH WHICH THE PROJECT MUST COMPLY:

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Rodney Lincoln
Signature of Applicant¹ (owner or prime contractor)

May 19, 2025
Date Signed

RODNEY LINCOLN
Printed Name¹

Airport Director
Title

¹This application shall be signed as follows:

- For a corporation, by a responsible corporate officer.
- For a partnership, by a general partner.
- For a sole proprietorship, by the proprietor.

For a municipal, state or other public facility, by principal executive officer, mayor, or ranking elected official

Please submit the LCNOI form to:

Chief, Environmental Permits Division
MS Department of Environmental Quality, Office of Pollution Control
P.O. Box 2261
Jackson, Mississippi 39225

Electronically:

<https://www.mdeq.ms.gov/construction-stormwater/>

Revised 3/23/22

PRIME CONTRACTOR CERTIFICATION

LARGE CONSTRUCTION GENERAL PERMIT

Coverage No. MSR10 _____ County _____

(Fill in your Certificate of Coverage Number and County)



By completing and submitting this form to MDEQ, the prime contractor is certifying that (1) they have operational control over the erosion and sediment control specifications (including the ability to make modifications to such specifications) or (2) they have day-to-day operational control of those activities at the site necessary to ensure compliance with the SWPPP and applicable permit conditions.

The owner(s) of the property and the prime contractor associated with regulated construction activity on the property have joint and severable responsibility for compliance with the permit. Notwithstanding any permit condition to the contrary, the coverage recipient and any person who causes pollution of waters of the state or places waste in a location where they are likely to cause pollution of any waters of the state shall remain responsible under applicable federal and state laws and regulations and applicable permits.

PRIME CONTRACTOR INFORMATION

PRIME CONTRACTOR CONTACT PERSON: _____ PHONE NUMBER: (____) _____

PRIME CONTRACTOR COMPANY: _____

PRIME CONTRACTOR STREET (P.O. BOX): _____

PRIME CONTRACTOR CITY: _____ STATE: _____ ZIP: _____

E-MAIL ADDRESS: _____

OWNER INFORMATION

OWNER CONTACT PERSON: _____ PHONE NUMBER: (____) _____

OWNER COMPANY NAME: _____

PROJECT INFORMATION

PROJECT NAME: _____

DESCRIPTION OF CONSTRUCTION ACTIVITY: _____

PHYSICAL SITE ADDRESS (If the physical address is not available indicate the nearest named road. For linear projects, indicate the beginning of the project and identify all counties the project traverses.)

STREET: _____

CITY: _____ COUNTY: _____

I certify that I am the prime contractor for this project and will comply with all the requirements in the above referenced general NPDES permit. I further certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Prime Contractor Signature¹ _____

Date Signed _____

Printed Name¹ _____

Title _____

¹This application shall be signed as follows:

- For a corporation, by a responsible corporate officer.
- For a partnership, by a general partner.
- For a sole proprietorship, by the proprietor.
- For a municipal, state or other public facility, by principal executive officer, mayor, or ranking elected official.

This Prime Contractors Certification form shall be submitted to:

Chief, Environmental Permits Division
MS Department of Environmental Quality, Office of Pollution Control
P.O. Box 2261
Jackson, Mississippi 39225



MAJOR MODIFICATION FORM FOR LARGE CONSTRUCTION GENERAL PERMIT

Coverage No. **MSR10** 9248 County Oktibbeha

INSTRUCTIONS

Coverage recipients shall notify the Mississippi Department of Environmental Quality (MDEQ) at least 30 days in advance of the following activities (check all that apply). This form should be submitted with a modified Storm Water Pollution Prevention Plan (SWPPP), updated USGS topographic map, Corps of Engineers Section 404 documentation and wastewater collection and treatment information, as appropriate.

☐ SWPPP details have been developed and are being submitted for MDEQ review for subsequent phases of an existing project.

☒ "Footprint" identified in the original LCNOI is proposed to be changed.

This form must be signed by the current coverage recipient under Mississippi's Large Construction General Permit. A different developer of new phases of existing subdivisions must apply for separate permit coverage through the submittal of a new complete LCNOI package. Coverage recipients are authorized to discharge storm water associated with proposed expansions of existing subdivisions or subsequent phases, under the conditions of the General Permit, only upon receipt of written notification of approval by MDEQ. All other modifications, such as changes of erosion and sediment controls used, must be in accordance with ACT6, S-1 (6) and S-2 (7) of the General Permit.

ALL INFORMATION MUST BE COMPLETED (indicate "N/A" where not applicable)

CURRENT COVERAGE RECIPIENT INFORMATION

COVERAGE RECIPIENT CONTACT NAME: Mr. Rodney Lincoln PHONE # (662) 418-5900
COMPANY NAME: George M. Bryan Field
STREET OR P.O. BOX: 120 Airport Road
CITY: Starkville STATE: MS ZIP: 39750 E-MAIL: rlincoln@cityofstarkville.com
IS THE APPLICANT DIFFERENT FROM THE CURRENT COVERAGE HOLDER? YES ☒ NO

PREPARER/CONSULTANT INFORMATION (Complete if prepared by someone other than applicant.)

PREPARER/CONSULTANT CONTACT NAME: Lee Kirkpatrick PHONE # (662) 323-8000
COMPANY NAME: Clearwater Consultants, Inc.
STREET OR P.O. BOX: Post Office Box 1328
CITY: Starkville STATE: Ms ZIP: 39760 E-MAIL: tlk@clearwaterconsultants.com
MAY MDEQ CORRESPOND DIRECTLY WITH THE PREPARER / CONSULTANT REGARDING THE PROPOSED PROJECT / MODIFICATION? ☒ YES NO

SITE INFORMATION

PROJECT NAME: South Runway Extension
CITY: Starkville, Mississippi TRIBAL LAND ID (N/A If not applicable): N/A33
Latitude / Longitude Collected at Project Entrance or Construction Start Point:
LATITUDE: 33 degrees 25 minutes 19 seconds LONGITUDE: 88 degrees 50 minutes 57 seconds
LAT & LONG COLLECTION METHOD (e.g., GPS, Map Interpolation): Google Earth
REDUCTION IN ACREAGE: _____ ADDITIONAL ACREAGE TO BE DISTURBED: 17
TOTAL PROJECT ACREAGE: 83 ESTIMATED CONSTRUCTION END DATE: August 2026

IS THE PROJECT REROUTING, FILLING OR CROSSING A WATER CONVEYANCE OF ANY KIND? (If yes, contact the U.S. Army Corps of Engineers' Regulatory Branch for permitting requirements.) ☐ YES ☒ NO

IF THE PROJECT IS A SUBDIVISION OR A COMMERCIAL DEVELOPMENT, HOW WILL SANITARY SEWAGE BE DISPOSED? Check one of the following and attach the pertinent documents.

- ☐ Existing Municipal or Commercial System. Please attach plans and specifications for the collection system and the associated "Information Regarding Proposed Wastewater Projects" form or approval from County Utility Authority in Hancock, Harrison, Jackson, Pearl River and Stone Counties. If the plans and specifications cannot be provided at the time of LCNOI submittal, MDEQ will accept written acknowledgement from official(s) responsible for wastewater collection and treatment that the flows generated from the proposed project can and will be transported and treated properly. The letter must include the estimated flow.
- ☐ Collection and Treatment System will be Constructed. Please attach a copy of the cover of the NPDES discharge permit from MDEQ or indicate the date the application was submitted to MDEQ (Date: _____.)
- ☐ Individual Onsite Wastewater Disposal Systems for Subdivisions Less than 35 Lots. Please attach a copy of the Letter of General Acceptance from the Mississippi State Department of Health or certification from a registered professional engineer that the platted lots should support individual onsite wastewater disposal systems.
- ☐ Individual Onsite Wastewater Disposal Systems for Subdivisions Greater than 35 Lots. A determination of the feasibility of installing a central sewage collection and treatment system must be made by MDEQ. A copy of the response from MDEQ concerning the feasibility study must be attached. If a central collection and wastewater system is not feasible, then please attach a copy of the Letter of General Acceptance from the State Department of Health or certification from a registered professional engineer that the platted lots should support individual onsite wastewater disposal systems.

INDICATE ANY LOCAL STORM WATER ORDINANCE WITH WHICH THE PROJECT MUST COMPLY:

NEAREST NAMED RECEIVING STREAM: Tobacco Juice Creek

IS RECEIVING STREAM ON MISSISSIPPI'S 303(d) LIST OF IMPAIRED WATER BODIES? (The 303(d) list of impaired waters and TMDL stream segments may be found on MDEQ's web site: <https://www.mdeq.ms.gov/water/surface-water/tmdl/>) ☒ YES ☐ NO

HAS A TMDL BEEN ESTABLISHED FOR THE RECEIVING STREAM SEGMENT? ☐ YES ☒ NO

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Rodney Lincoln
Signature (must be signed by coverage recipient)

Rodney Lincoln
Printed Name

10-28-2025
Date

Airport Director
Title

Please submit this form to: Chief, Environmental Permits Division
Office of Pollution Control
MS Department of Environmental Quality
P.O. Box 2261
Jackson, Mississippi 39225

Electronically: <https://www.mdeq.ms.gov/construction-stormwater/>

Keep a Copy Available at the Permitted Facility or Locally Available
Submit the Inspection Reports Only if Requested by the Mississippi Department of Environmental Quality (MDEQ)

**LARGE CONSTRUCTION GENERAL PERMIT
SITE INSPECTION AND CERTIFICATION FORM
COVERAGE NUMBER (MSR10 _ _ _ _)**



INSTRUCTIONS

Results of construction storm water inspections required by ACT6 of this permit shall be recorded on this report form and kept with the Storm Water Pollution Prevention Plan (SWPPP) in accordance with the inspection documentation provisions of ACT9 of the this permit. Inspections shall be performed at least weekly for a minimum of four inspections per month. The coverage number must be listed at the top of all Inspection and Certification Forms.

COVERAGE RECIPIENT INFORMATION

OWNER/PRIME CONTRATOR NAME: _____
PROJECT NAME: _____
PROJECT STREET ADDRESS: _____
PROJECT CITY: _____ PROJECT COUNTY: _____
OWNER/PRIME CONTRACTOR MAILING ADDRESS: _____
MAILING CITY: _____ STATE: _____ ZIP: _____
CONTACT PERSON: _____ CONTACT PHONE NUMBER: (_____) _____
EMAIL ADDRESS: _____

INSPECTION DOCUMENTATION

DATE (mo/day/yr)	TIME (hr:min AM/PM)	ANY DEFICIENCIES? (CHECK IF YES)	INSPECTOR(S)
		☐	
		☐	
		☐	
		☐	
		☐	
		☐	

Deficiencies Noted During any Inspection (give date(s); attach additional sheets if necessary): _____

Corrective Action Taken or Planned (give date(s); attach additional sheets if necessary): _____

Based upon this inspection, which I or personnel under my direct supervision conducted, I certify that all erosion and sediment controls have been implemented and maintained, except for those deficiencies noted above, in accordance with the Storm Water Pollution Prevention Plan (SWPPP) and sound engineering practices as required by the above referenced permit. I further certify that the LCNOI and SWPPP information is up to date.

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fines and imprisonment for knowing violations.

Authorized Signature

Date

Printed Name

Title

**MAJOR MODIFICATION FORM
FOR LARGE CONSTRUCTION GENERAL PERMIT**
Coverage No. MSR10 _____ County _____



INSTRUCTIONS

Coverage recipients shall notify the Mississippi Department of Environmental Quality at least 30 days in advance of the following activities (check all that apply). This form should be submitted with a modified Storm Water Pollution Prevention Plan (SWPPP), updated USGS topographic map, Corps of Engineers Section 404 documentation and wastewater collection and treatment information, as appropriate.

- ☐ SWPPP details have been developed and are ready for MDEQ review for subsequent phases of an existing, covered project.
- ☐ "Footprint" identified in the original LCNOI is proposed to be enlarged.

This form must be signed by the current coverage recipient under Mississippi's Large Construction General Permit. A different developer of new phases of existing subdivisions must apply for separate permit coverage through the submittal of a new complete LCNOI package. Coverage recipients are authorized to discharge storm water associated with proposed expansions of existing subdivisions or subsequent phases, under the conditions of the General Permit, only upon receipt of written notification of approval by MDEQ. All other modifications, such as changes of erosion and sediment controls used, must be in accordance with ACT6, S-1 (6) and S-2 (7) of the General Permit.

ALL INFORMATION MUST BE COMPLETED (indicate "N/A" where not applicable)

COVERAGE RECIPIENT INFORMATION

COVERAGE RECIPIENT CONTACT NAME: _____ TEL # (____) _____

COMPANY NAME: _____

STREET OR P.O. BOX: _____

CITY: _____ STATE: _____ ZIP: _____ E-MAIL: _____

PROJECT INFORMATION

PROJECT NAME: _____

CITY: _____

ADDITIONAL ACREAGE TO BE DISTURBED: _____ TOTAL PROJECT ACREAGE: _____

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Signature (must be signed by coverage recipient)

Date

Printed Name

Title

Please submit this form to:

Chief, Environmental Permits Division
MS Department of Environmental Quality, Office of Pollution Control
P.O. Box 2261
Jackson, Mississippi 39225

Environmental Permits for Industrial Facilities

Request for Transfer of Permit, General Permit Coverage and/or Name Change

Instructions: For Ownership Change-Complete all Items on Page 1 (except Item VIII) and Page 2 (reverse side).

For Name Change Only-Complete Items I, II, V, VI, VII, VIII, and Page 2 (reverse side).

Note-This form should be submitted to MDEQ when a transferal date is finalized but prior to the actual transfer.

Item I. Facility Name: _____ Location: (Do Not Use P.O. Box) Street: _____ City: _____ State: <u>MS</u> Zip: _____ County: _____ Telephone: (_____) _____	Item II. Responsible official after transfer or name change: Name: _____ Title: _____ Mailing Address: Street/P.O. Box: _____ City: _____ State: _____ Zip: _____ Telephone (_____) _____								
Item III. Previous Permittee¹: _____ Mailing Address: Street/P.O. Box: _____ City: _____ State: _____ Zip: _____ Telephone: (_____) _____	Item IV. New Permittee¹: _____ Mailing Address: Street/P.O. Box: _____ City: _____ State: _____ Zip: _____ Telephone: (_____) _____								
Item V. Industrial Activity SIC Code: _____ Brief Description: _____	Item VI. Will Facility Operations Change? Yes _____ No _____ If yes, the appropriate applications and permits may require modification prior to change.								
Item VII. Will Facility Name Change? Yes _____ No _____ If Yes, Provide New Name for Permit Coverage. New Name: _____	Item VIII. Signature for Name Change Print Name: _____ Authorized Signature²: _____ Title: _____ Date: _____								
Item IX. We the undersigned request transfer of permit(s) and/or permit coverage(s) listed on the backside of this form. From: _____ To: _____ Acquisition Date: _____ By signature below, the recipient certifies that: 1) they are aware of the requirements of the permit(s), 2) the applicant can demonstrate to the Permit Board it has the financial resources and operational expertise and 3) agrees to accept responsibility and liability for the permit(s) listed on the back of this document. By signature below, the previous permittee is requesting that the permit(s) and/or permit coverage(s) be transferred to the recipient. The transfer of the permit(s) or permit coverage(s) will be by written notification from the Office of Pollution Control (OPC). The OPC may require submittal of information regarding financial capability and past compliance history of the recipient. <table style="width: 100%; margin-top: 20px;"> <tr> <td style="width: 50%;"> _____ Print New Permittee¹ Name </td> <td style="width: 50%;"> _____ Print Previous Permittee¹ Name </td> </tr> <tr> <td> _____ New Authorized Signature² </td> <td> _____ Previous Authorized Signature² </td> </tr> <tr> <td> _____ Title </td> <td> _____ Title </td> </tr> <tr> <td> _____ Date </td> <td> _____ Date </td> </tr> </table>		_____ Print New Permittee¹ Name	_____ Print Previous Permittee¹ Name	_____ New Authorized Signature²	_____ Previous Authorized Signature²	_____ Title	_____ Title	_____ Date	_____ Date
_____ Print New Permittee¹ Name	_____ Print Previous Permittee¹ Name								
_____ New Authorized Signature²	_____ Previous Authorized Signature²								
_____ Title	_____ Title								
_____ Date	_____ Date								

¹A Permittee is a company or individual that has been issued an individual permit or coverage under a general permit.

²Authorized Signature must be owner or in the case of a corporation, a corporate officer as defined in Regulations 11 Miss. Admin. Code Pt. 2, Ch. 2. and 11 Miss. Admin. Code Pt. 6, Ch. 1.

Mississippi Department of Environmental Quality/Office of Pollution Control
P.O. Box 2261
Jackson, Mississippi 39225
(601) 961-5171

Item X. Storm Water (Check One) ☐ A Storm Water Pollution Prevention Plan (SWPPP) is not required for the site. ☐ The recipient certifies that they have received a copy of the Office of Pollution Control approved SWPPP from the original owner. ☐ The recipient is submitting a new SWPPP, which is attached to this form. ☐ A copy of the SWPPP cannot be obtained from the original owner.	Item XI. Hazardous Waste ID Number EPA ID No. _____ (Check One) ☐ An EPA Hazardous Waste ID Number is not required for the site. ☐ The site's EPA ID Number is listed above and a Notification of Regulated Waste Activity Form is attached.
Item XII. Permit(s) and/or Coverage(s) to be Transferred	
Permit Type: _____ Permit/Coverage No.: _____ Permit Issuance Date: _____ Date of General Permit Coverage: _____ Permit Expiration Date: _____	Permit Type: _____ Permit/Coverage No.: _____ Permit Issuance Date: _____ Date of General Permit Coverage: _____ Permit Expiration Date: _____
Permit Type: _____ Permit/Coverage No.: _____ Permit Issuance Date: _____ Date of General Permit Coverage: _____ Permit Expiration Date: _____	Permit Type: _____ Permit/Coverage No.: _____ Permit Issuance Date: _____ Date of General Permit Coverage: _____ Permit Expiration Date: _____
Permit Type: _____ Permit/Coverage No.: _____ Permit Issuance Date: _____ Date of General Permit Coverage: _____ Permit Expiration Date: _____	Permit Type: _____ Permit/Coverage No.: _____ Permit Issuance Date: _____ Date of General Permit Coverage: _____ Permit Expiration Date: _____
Permit Type: _____ Permit/Coverage No.: _____ Permit Issuance Date: _____ Date of General Permit Coverage: _____ Permit Expiration Date: _____	OTHER INFORMATION:

INSPECTION SUSPENSION FORM

UNDER LARGE CONSTRUCTION STORM WATER GENERAL NPDES PERMIT MSR10



MISSISSIPPI DEPARTMENT OF
ENVIRONMENTAL QUALITY

INSTRUCTIONS

Coverage recipients under Mississippi's Large Construction Storm Water General Permit may temporarily suspend required weekly inspections of erosion and sediment controls and monthly record keeping by submission of this form. Inspections may be suspended only when land disturbing activities have ceased, no further land disturbing activities are planned for a period of at least six (6) months, the site is stable with no active erosion, and vegetative cover has been established (see ACT9, S-1). The coverage recipient is responsible for all permit conditions during the suspension period and nothing in this condition shall limit the rights of MDEQ to take enforcement or other actions against the coverage recipient. Once land disturbing activities resume MDEQ must be notified and all inspections and record keeping required by the permit must also resume. Color photographs, representative of the construction site, must be submitted with this inspection form.

COVERAGE RECIPIENT INFORMATION

COVERAGE RECIPIENT CONTACT PERSON: _____

COMPANY NAME: _____

STREET OR P.O. BOX: _____

CITY: _____ STATE: _____ ZIP: _____

PHONE # (INCLUDE AREA CODE): _____ E-MAIL: _____

PROJECT INFORMATION

CONSTRUCTION STORM WATER GENERAL PERMIT COVERAGE NUMBER: **MSR10** _ _ _ _

PROJECT NAME: _____

CITY: _____ COUNTY: _____

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. **I further certify that: land disturbing activities have ceased, no further land disturbing activities are planned for a period of at least six (6) months, the site is stable with no active erosion, and vegetative cover has been established.**

Signature (must be signed by coverage recipient) _____

Date Signed _____

Printed Name _____

Title _____

Please submit this form to:

Chief, Environmental Permits Division
MS Department of Environmental Quality, Office of Pollution Control
P.O. Box 2261
Jackson, Mississippi 39225

Request for Termination (RFT) of Coverage



LARGE CONSTRUCTION GENERAL PERMIT
Coverage No. MSR10 _____ **County** _____
(Fill in your Certificate of Coverage Number and County)

This form must be submitted within thirty (30) days of achieving final stabilization (see ACT10, S-1 of general permit). Failure to submit this form is a violation of permit conditions.

The signatory of this form must be the owner or operator (prime contractor) who is the current coverage recipient (rather than the project manager or environmental consultant).

(Please Print or Type)

Project Name: _____

Physical Site Street Address (if not available, indicate nearest named road): _____

City: _____ **County:** _____ **Zip:** _____

Coverage Recipient Company Name: _____

Street Address / P.O. Box: _____

City: _____ **State:** _____ **Zip:** _____

Coverage Recipient Contact Name and Position: _____ **Tel. #: ()** _____

Has another owner(s) or operator(s) assumed control over all areas of the site that have not reached final stabilization?

RESIDENTIAL SUBDIVISIONS:

- ☐ **YES. A copy of the Registration Form for Residential Lot Coverage for each lot or out parcel that has been sold and a site map, indicating which lots have been sold, are attached.**
- ☐ **NO. Coverage may not be terminated until all areas have reached final stabilization.**

COMMERCIAL DEVELOPMENT:

- ☐ **YES. A copy of the site map, indicating which out-parcels have been sold, is attached.**
- ☐ **NO. Coverage may not be terminated until all areas have reached final stabilization.**

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fines and imprisonment for knowing violations. I understand that by submitting this Request for Termination and receiving written confirmation, I will no longer be authorized to discharge storm water associated with construction activity under this general permit. Discharging pollutants associated with construction activity to waters of the State without proper permit coverage is a violation of state law. I also understand that the submittal of this Request for Termination does not release an owner or operator from liability for any violations of this permit or the Clean Water Act.


Authorized Name (Print) Telephone Signature Date Signed

¹This application shall be signed according to the General Permit, ACT11, T-7 as follows:

- For a corporation, by a responsible corporate officer.
- For a partnership, by a general partner.
- For a sole proprietorship, by the proprietor.
- For a municipal, state or other public facility, by principal executive officer, mayor, or ranking elected official.

After signing please mail to: Chief, Environmental Permits Division
MS Department of Environmental Quality, Office of Pollution Control
P.O. Box 2261
Jackson, Mississippi 39225


- Structural Controls General Details

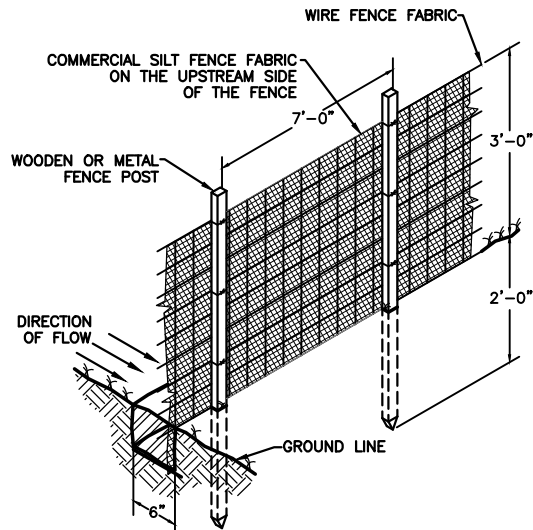


NOTES:

1. EXCAVATE THE TRENCH 6" BELOW THE EXISTING GROUND LINE.
2. INSTALL THE FABRIC TO THE BOTTOM OF THE TRENCH
3. BACKFILL AND COMPACT THE TRENCH, COVERING THE FABRIC.
4. CONTINUOUSLY REMOVE TRAPPED SEDIMENT.


SILT FENCE
ISOMETRIC, NOT TO SCALE

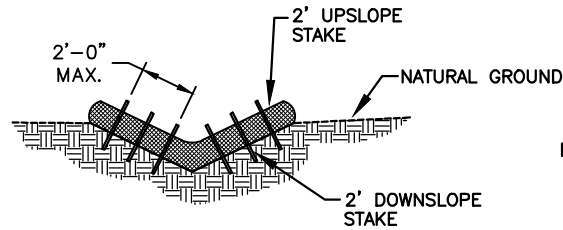


**CROSS SECTION
VEE DITCH**

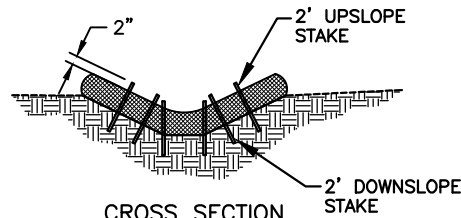


**CROSS SECTION
TRAPEZOIDAL DITCH**




INSET "A"



INSET "B"

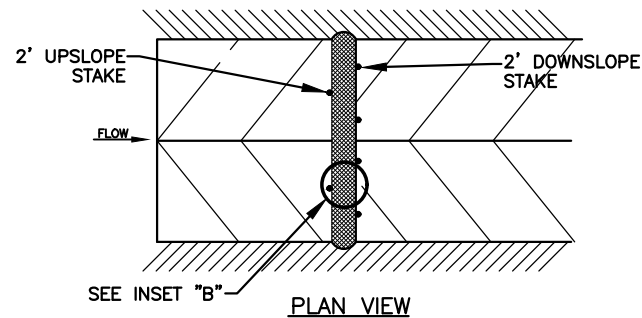

WATTLE DETAIL
NOT TO SCALE

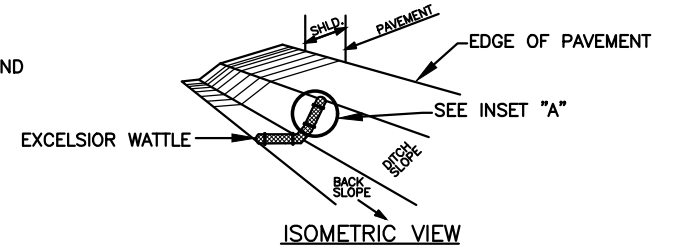

NOTES:

- USE 12" DIAMETER EXCELSIOR WATTLE (MINIMUM)
- USE TWO (2) FOOT WOODEN STAKES WITH A 2 IN. x 2 IN. NOMINAL CROSS SECTION
- ONLY INSTALL WATTLE(S) TO A HEIGHT IN DITCH SO FLOW WILL NOT WASH AROUND WATTLE AND SCOUR DITCH SLOPES AND AS DIRECTED.
- INSTALL A MINIMUM OF TWO (2) UPSLOPE STAKES AND FOUR (4) DOWNSLOPE STAKES AT AN ANGLE TO WEDGE WATTLE TO BOTTOM OF DITCH
- PROVIDE STAPLES MADE OF 0.125 IN. DIAMETER STEEL WIRE FORMED INTO A "U" SHAPE NOT LESS THAN 12 IN. IN LENGTH
- INSTALL STAPLES APPROXIMATELY EVERY ONE (1) LINEAR FOOT ON BOTH SIDES OF WATTLE AND AT EACH END TO SECURE IT TO THE SOIL

- USGS Soils Report Information for Oktibbeha County, MS

TABLE 3.—*Soils rated for woodland use—Continued*

Woodland suitability group	Soil	Potential productivity			Hazards and limitations			Species suitable for planting
		Tree species ¹	Average site index and standard deviation ²	Range of site index	Erosion hazard	Equipment restriction	Seedling mortality	
Group 3c8: Poorly drained to moderately well drained soils on uplands. Permeability is slow to very slow. Available water capacity is high.	Oktibbeha: OIB2, OIC2, OhC2, OtE3.	Southern red oak..... <i>Loblolly pine</i> Shortleaf pine..... Eastern redcedar.....	³ 70 76 ± 5 66 ± 4 45	65-75 69-82 60-72 40-50	Slight.....	Moderate....	Moderate....	Loblolly pine and eastern redcedar.
	Sessum: Se.	Southern red oak..... White oak..... <i>Loblolly pine</i> <i>Sweetgum</i> Eastern redcedar.....	 83 ± 3 80	 75-90 70-90	Slight.....	Moderate....	Moderate....	Loblolly pine and eastern redcedar.
Group 4c2c: Somewhat poorly drained, moderately well drained, and well drained soils on uplands. Permeability is slow to very slow. Available water capacity is medium to high.	Brooksville: BrA, BrB.	Eastern redcedar.....	40	-----	Slight to moderate.	Moderate....	Moderate....	Eastern redcedar.
	Houston: Ho.	Eastern redcedar.....	40	35-45	Slight.....	Moderate....	Moderate....	Eastern redcedar.
	Sumter: SuC2, SuD2, Sumter part of KsF3, SvB2, and SvC2.	Eastern redcedar.....	37 ± 5	32-45	Moderate....	Moderate....	Moderate....	Eastern redcedar.
Group 4d3c: Well-drained soils on uplands. Permeability is slow. Available water capacity is low to medium.	Binnsville part of SvB2 and SvC2.	Eastern redcedar.....	40	35-45	Slight to moderate.	Moderate....	Severe.....	Eastern redcedar.


¹ Information for broadleaf trees developed by WALTER M. BROADFOOT, Southern Hardwoods Laboratory, Southern Forest Experiment Station, U.S. Forest Service, Stoneville, Mississippi. Species in italics is the indicator species.

² Site index is the average height in feet of dominant and codominant trees at 50 years of age for all species except cottonwood, which is at 30 years.

³ Estimated site index based on a similar soil or another species on the same soil.

⁴ Hardwoods not suitable where soils are severely eroded.

OKTIBBEHA COUNTY, MISSISSIPPI NO. 15





This map is one of a series of maps prepared by the United States Department of Agriculture, Soil Conservation Service, and the Wildlife Conservation Service, for the purpose of showing the distribution of the various species of birds and mammals in the United States. The maps are prepared by the Wildlife Conservation Service, and are based on the data collected by the various State Game and Fish Commissions, and the various Federal Game and Fish Commissions. The maps are prepared by the Wildlife Conservation Service, and are based on the data collected by the various State Game and Fish Commissions, and the various Federal Game and Fish Commissions.

OKTIBBEHA COUNTY, MISSISSIPPI NO. 21

- Site Inspection Photographs



Photo 1
Cleared Area West View No Erosion Noted



Photo 4
SW Corner of Cleared Property No Erosion Noted



Photo 2
Fence North Side No Erosion Noted West View



Photo 5
Fence Line South Side No Erosion Noted



Photo 3
South Clearing Limits No Erosion Noted



Photo 6
NW West Corner No Erosion Noted