

Brad White
Executive Director
Jeff Ely, P.E.
Chief of Staff



Earl Glenn, Jr., P.E.
Deputy Executive Director/Chief Engineer
Lisa M. Hancock, CPA
Deputy Executive Director/Administration

October 19, 2026

Ms. Carrie Barefoot
Construction and Building Materials
Environmental Permits Division
Office of Pollution Control
Mississippi Department of Environmental Quality
P. O. Box 2261
Jackson, Mississippi 39225

Dear Ms. Barefoot:

Re: LCNOI Submittal Under MSR10

This LCNOI application is for the MDOT Project No. STBG-0039-01(016) FMS 109098/301000 on SR 18 for the bridge replacement of Bridge 10.4 over Booths Creek in Claiborne County, Mississippi. All necessary information is enclosed in this application.

Under ACT5, T-5 (A) of the new General Permit it is required that a buffer zone shall be maintained between land disturbing activities and perennial water bodies. A minimum of 150-foot buffer zone is recommended. Your office defines a buffer zone under ACT12, T-2 as a strip of dense undisturbed perennial vegetation, either original or reestablished, that borders perennial streams and rivers, ponds and lakes and wetlands. ACT12, T-17 defines infeasible as being not technologically possible, or not economically practicable and achievable. This BMP of a minimum 150-foot buffer zone recommended for perennial water bodies in the Large Construction General Permit is not feasible for MDOT projects. Due to the nature of these linear construction projects which require bridges, box bridges, box culverts and pipe culverts, it would not be practical or cost-effective to adhere to this requirement.

If a 150 foot buffer area is not feasible then ACT5 T-3(6) requires a 50-foot undisturbed natural buffer around waters of the United States; or provide and maintain an undisturbed natural buffer that is less than 50 feet and supplemented by additional erosion and sediment controls which in combination achieves the sediment load reduction equivalent to a 50-foot undisturbed natural buffer. Riparian buffer protection is anticipated at Booths Creek crossing and is included as Sheet No. ECP-RB-3.

This project involves filling and reshaping areas of roadway medians and fill slopes. Booths creek will have temporary impacts due to bridge construction. ECP sheets are included with a location map. The Booths Creek areas are listed as impaired on the 303(d) list due to biological impairment. An Alternative Restoration Approach is being implemented in lieu of a TMDL. Approximately 8 acres of soil will be disturbed.

Bridge erosion control pay items for best management practices include: 1) No dirt can be pushed into the creek, 2) If a platform for working is needed, then riprap shall be used, 3) Minimize disturbance to existing banks, 4) If the bent is in close proximity to the banks, then riprap shall be placed prior to pile driving, 5) Riprap shall be placed on slopes immediately after pile driving, 6) Clearing should be kept to a minimum and grubbing only where required, and 7) Turbidity curtain may be required. Also, various erosion control measures that will be used are select material for undercuts, geotextile stabilization, concrete paved ditch, grassing, agricultural limestone, vegetative mulch, temporary grassing, temporary silt fence, and 20" wattles. The site specific SWPPP that will be submitted by the contractor for approval will have all of this information. We believe these BMPs will suffice for adequate control of soil erosion leaving the worksite.

If you have questions, please feel free to give me a call at (601)359-7275. This project is scheduled to be advertised in December 2026 and let in January, 2027.

Sincerely,

A handwritten signature in blue ink that reads "John C. Taylor". The signature is written in a cursive, flowing style.

John C. Taylor, PE, BCEE, RPG
MDOT, Roadway Design Division



AI 91694

Rec'd via email:
10/19/2026

MSR120031

MISSISSIPPI DEPARTMENT OF
ENVIRONMENTAL QUALITY

LARGE CONSTRUCTION NOTICE OF INTENT (LCNOI) FOR COVERAGE UNDER THE LARGE CONSTRUCTION STORM WATER GENERAL NPDES PERMIT

INSTRUCTIONS

The Large Construction Notice of Intent (LCNOI) is for coverage under the Large Construction General Permit for land disturbing activities of five (5) acres or greater; or for land disturbing activities, which are part of a larger common plan of development or sale that are initially less than five (5) acres but will ultimately disturb five (5) or more acres. Applicant must be the owner or operator. For construction activities, the operator is typically the prime contractor. The owner(s) of the property and the prime contractor associated with regulated construction activity on the property have joint and severable responsibility for compliance with the Large Construction Storm Water General Permit MSR10.

If the company seeking coverage is a corporation, a limited liability company, a partnership, or a business trust, attach proof of its registration with the Mississippi Secretary of State and/or its Certificate of Good Standing. This registration or Certificate of Good Standing must be dated within twelve (12) months of the date of the submittal of this coverage form. Coverage will be issued in the company name as it is registered with the Mississippi Secretary of State.

Completed LCNOIs should be filed at least thirty (30) days prior to the commencement of construction. Discharge of storm water from large construction activities without written notification of coverage is a violation of state law.

Submittals with this LCNOI must include:

- A site-specific Storm Water Pollution Prevention Plan (SWPPP) developed in accordance with ACT5 of the General Permit
- A detailed site-specific scaled drawing showing the property layout and the features outlined in ACT5 of the General Permit
- A United States Geological Survey (USGS) quadrangle map or photocopy, extending at least one-half mile beyond the facility property boundaries with the site location and outfalls outlined or highlighted. The name of the quadrangle map must be shown on all copies. Quadrangle maps can be obtained from the MDEQ, Office of Geology at 601-961-5523.

Additional submittals may include the following, if applicable:

- Appropriate Section 404 documentation from U.S. Army Corps of Engineers
- Appropriate documentation concerning future disposal of sanitary sewage and sewage collection system construction
- Appropriate documentation from the MDEQ Office of Land & Water concerning dam construction and low flow requirements
- Approval from County Utility Authority in Hancock, Harrison, Jackson, Pearl River and Stone Counties
- Antidegradation report for disturbance within Waters of the State

ALL QUESTIONS MUST BE ANSWERED (Answer "NA" if the question is not applicable)

OC

MSR 120031

(NUMBER TO BE ASSIGNED BY STATE)

APPLICANT IS THE: ☒ OWNER ☐ PRIME CONTRACTOR

OWNER CONTACT INFORMATION

OWNER CONTACT PERSON: John C. Taylor
OWNER COMPANY LEGAL NAME: Mississippi Dept. of Transportation
OWNER STREET OR P.O. BOX: P. O. Box 1850
OWNER CITY: Jackson STATE: Ms ZIP: 39215
OWNER PHONE #: (601) 359-7275 OWNER EMAIL: jtaylor@mdot.ms.gov

PREPARER CONTACT INFORMATION

IF NOI WAS PREPARED BY SOMEONE OTHER THAN THE APPLICANT

CONTACT PERSON: _____
COMPANY LEGAL NAME: _____
STREET OR P.O. BOX: _____
CITY: _____ STATE: _____ ZIP: _____
PHONE # () EMAIL: _____

PRIME CONTRACTOR CONTACT INFORMATION

PRIME CONTRACTOR CONTACT PERSON: _____
PRIME CONTRACTOR COMPANY LEGAL NAME: _____
PRIME CONTRACTOR STREET OR P.O. BOX: _____
PRIME CONTRACTOR CITY: _____ STATE: _____ ZIP: _____
PRIME CONTRACTOR PHONE #: () PRIME CONTRACTOR EMAIL: _____

FACILITY SITE INFORMATION

FACILITY SITE NAME: MDOT Claiborne 109098/301000
FACILITY SITE ADDRESS (If the physical address is not available, please indicate the nearest named road. For linear projects indicate the beginning of the project and identify all counties the project traverses.)
STREET: SR 18
CITY: Hermanville STATE: MS COUNTY: Claiborne ZIP: 39076
FACILITY SITE TRIBAL LAND ID (N/A If not applicable): NA
LATITUDE: 31 degrees 58 minutes 29.58 seconds LONGITUDE: 90 degrees 49 minutes 06.18 seconds
LAT & LONG DATA SOURCE (GPS (Please GPS Project Entrance/Start Point) or Map Interpolation): Hermanville
TOTAL ACREAGE THAT WILL BE DISTURBED ¹: 8

IS THIS PART OF A LARGER COMMON PLAN OF DEVELOPMENT?	YES ☐	NO ☒
IF YES, NAME OF LARGER COMMON PLAN OF DEVELOPMENT: _____		
AND PERMIT COVERAGE NUMBER: MSR10 _____		
ESTIMATED CONSTRUCTION PROJECT START DATE:	2027-02-15 YYYY-MM-DD	
ESTIMATED CONSTRUCTION PROJECT END DATE:	2029-03-15 YYYY-MM-DD	
DESCRIPTION OF CONSTRUCTION ACTIVITY: <u>Bridge Replacement</u>		
PROPOSED DESCRIPTION OF PROPERTY USE AFTER CONSTRUCTION HAS BEEN COMPLETED: <u>Highway Use</u>		

SIC Code: <u>1611</u>	NAICS Code: <u>237310</u>
-----------------------	---------------------------

NEAREST NAMED RECEIVING STREAM: <u>Booths Creek</u>	
IS RECEIVING STREAM ON MISSISSIPPI'S 303(d) LIST OF IMPAIRED WATER BODIES? (The 303(d) list of impaired waters and TMDL stream segments may be found on MDEQ's web site: http://www.deq.state.ms.us/MDEQ.nsf/page/TWB_Total_Maximum_Daily_Load_Section)	YES ☒ NO ☐
HAS A TMDL BEEN ESTABLISHED FOR THE RECEIVING STREAM SEGMENT?	YES ☐ NO ☒
FOR WHICH POLLUTANT: Biological Impairment: Alternative Restoration Approach is being implemented in lieu of TMDL	
ARE THERE RECREATIONAL STREAMS, PRIVATE/PUBLIC PONDS OR LAKES WITHIN ½ MILE DOWNSTREAM OF PROJECT BOUNDARY THAT MAY BE IMPACTED BY THE CONSTRUCTION ACTIVITY?	YES ☐ NO ☒
EXISTING DATA DESCRIBING THE SOIL (for linear projects please describe in SWPPP): SM, CL, ML	
WILL FLOCCULANTS BE USED TO TREAT TURBIDITY IN STORM WATER?	YES ☐ NO ☒
IF YES, INDICATE THE TYPE OF FLOCCULANT.	☐ ANIONIC POLYACRYLIMIDE (PAM) ☐ OTHER _____
IF YES, DOES THE SWPPP DESCRIBE THE METHOD OF INTRODUCTION, THE LOCATION OF INTRODUCTION AND THE LOCATION OF WHERE FLOCCULATED MATERIAL WILL SETTLE?	
IS A SDS SHEET INCLUDED FOR THE FLOCCULATE?	YES ☐ NO ☒
WILL THERE BE A 50 FT BUFFER BETWEEN THE PROJECT DISTURBANCE AND THE WATERS OF THE STATE?	YES ☐ NO ☒
IF NOT, PROVIDE EQUIVALENT CONTROL MEASURES IN THE SWPPP.	

¹ Acreage for subdivision development includes areas disturbed by construction of roads, utilities and drainage. Additionally, a housesite of at least 10,000 ft² per lot (entire lot, if smaller) shall be included in calculating acreage disturbed.

DOCUMENTATION OF COMPLIANCE WITH OTHER REGULATIONS/REQUIREMENTS
COVERAGE UNDER THIS PERMIT WILL NOT BE GRANTED UNTIL ALL OTHER REQUIRED
MDEQ PERMITS AND APPROVALS ARE SATISFACTORILY ADDRESSED

IS LCNOI FOR A FACILITY THAT WILL REQUIRE OTHER PERMITS?

YES ☐

NO ☒

IF YES, CHECK ALL THAT APPLY:

☐ AIR

☐ HAZARDOUS WASTE

☐ PRETREATMENT

☐ WATER STATE OPERATING

☐ INDIVIDUAL NPDES

☐ OTHER: _____

IS THE PROJECT REROUTING, FILLING OR CROSSING A WATER CONVEYANCE
OF ANY KIND? (If yes, contact the U.S. Army Corps of Engineers' Regulatory Branch for permitting requirements.)

YES ☐

NO ☒

IF THE PROJECT REQUIRES A CORPS OF ENGINEER SECTION 404 PERMIT, PROVIDE APPROPRIATE DOCUMENTATION THAT:

- The project has been approved by individual permit, or
- The work will be covered by a nationwide permit and NO NOTIFICATION to the Corps is required, or
- The work will be covered by a nationwide or general permit and NOTIFICATION to the Corps is required

IS THE PROJECT REROUTING, FILLING OR CROSSING A STATE WATER CONVEYANCE
OF ANY KIND? (If yes, please provide an antidegradation report.)

YES ☐

NO ☒

IS A LAKE REQUIRING THE CONSTRUCTION OF A DAM BEING PROPOSED?
(If yes, provide appropriate approval documentation from MDEQ Office of Land and Water, Dam Safety.)

YES ☐

NO ☒

IF THE PROJECT IS A SUBDIVISION OR A COMMERCIAL DEVELOPMENT, HOW WILL SANITARY SEWAGE
BE DISPOSED? Check one of the following and attach the pertinent documents.

- ☐ Existing Municipal or Commercial System. Please attach plans and specifications for the collection system and the associated "Information Regarding Proposed Wastewater Projects" form or approval from County Utility Authority in Hancock, Harrison, Jackson, Pearl River and Stone Counties. If the plans and specifications can not be provided at the time of LCNOI submittal, MDEQ will accept written acknowledgement from official(s) responsible for wastewater collection and treatment that the flows generated from the proposed project can and will be transported and treated properly. The letter must include the estimated flow.
- ☐ Collection and Treatment System will be Constructed. Please attach a copy of the cover of the NPDES discharge permit from MDEQ or indicate the date the application was submitted to MDEQ (Date: _____.)
- ☐ Individual Onsite Wastewater Disposal Systems for Subdivisions Less than 35 Lots. Please attach a copy of the Letter of General Acceptance from the Mississippi State Department of Health or certification from a registered professional engineer that the platted lots should support individual onsite wastewater disposal systems.
- ☐ Individual Onsite Wastewater Disposal Systems for Subdivisions Greater than 35 Lots. A determination of the feasibility of installing a central sewage collection and treatment system must be made by MDEQ. A copy of the response from MDEQ concerning the feasibility study must be attached. If a central collection and wastewater system is not feasible, then please attach a copy of the Letter of General Acceptance from the State Department of Health or certification from a registered professional engineer that the platted lots should support individual onsite wastewater disposal systems.

INDICATE ANY LOCAL STORM WATER ORDINANCE (I.E. MS4) WITH WHICH THE PROJECT MUST COMPLY:

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.



Signature of Applicant¹ (owner or prime contractor)

10/19/2026

Date Signed

Lee Frederick

Printed Name¹

Assistant Chief Engineer- Preconstruction

Title

¹This application shall be signed as follows:

- For a corporation, by a responsible corporate officer.
- For a partnership, by a general partner.
- For a sole proprietorship, by the proprietor.

For a municipal, state or other public facility, by principal executive officer, mayor, or ranking elected official

Please submit the LCNOI form to:


Chief, Environmental Permits Division
MS Department of Environmental Quality, Office of Pollution Control
P.O. Box 2261
Jackson, Mississippi 39225

Electronically:

<https://www.mdeq.ms.gov/construction-stormwater/>

Revised 3/23/22

Location Map

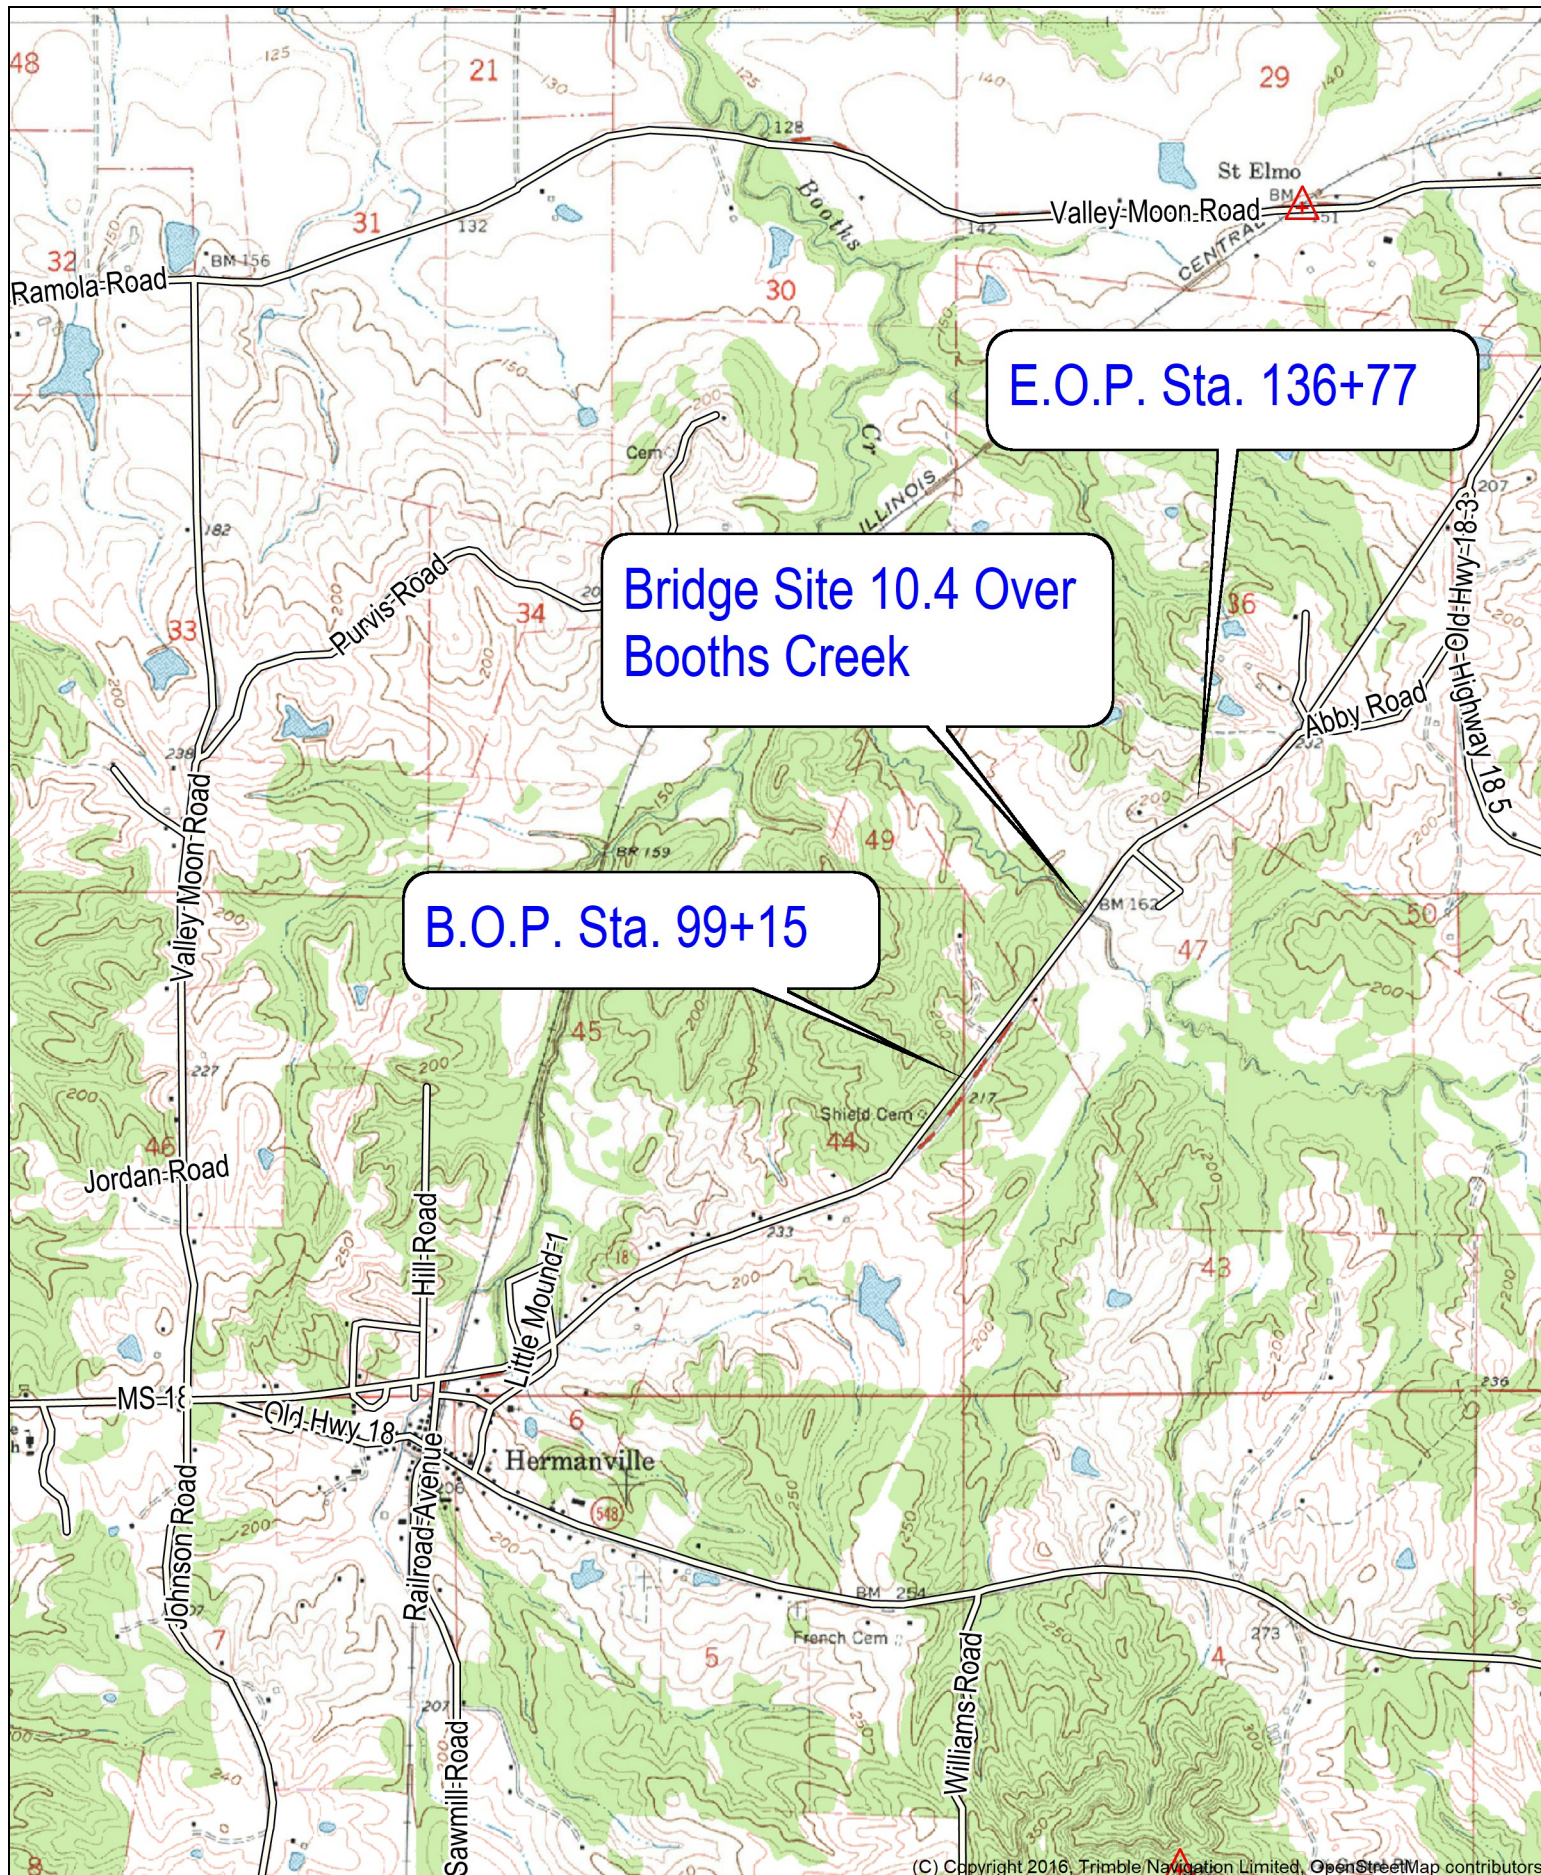

Name: HERMANVILLE
 Date: 06/09/26
 Scale: 1 inch = 2,000 ft.

Location: 031° 58' 25.5691" N, 090° 49' 41.8880" W
 Claiborne County SR 18 Replace Bridge 10.4 on New
 Alignment

Corps Intent to Approve Coverage Under NW 23

Taylor, John Cox

From: Everitt, Jared H CIV USARMY CEMVK (USA) <Jared.H.Everitt@usace.army.mil>
Sent: Wednesday, October 14, 2026 10:47 AM
To: Johnson, Brad
Cc: Wodtke, Andrea R; Williamson, Stanley B. (Bryan) CIV USARMY CEMVK (USA); Dixon, John S CIV USARMY CEMVK (USA)
Subject: RE: MVK-2026-00748 MDOT, SR 18 Bridge Replacement (10.4), Project No: STBG-0039-01(016); 109098-301000, Claiborne County, Mississippi

Hey Brad,

I just flipped through this one. I think this is the one we discussed doing a possible AJD to help cut down on stream mitigation for a bunch of the ephemeral stream crossings. However I think we still had a little over a half acre of impacts to wetlands. Since you guys issued a CE on this one we will most likely permit it as a NWP 23.

Respectfully,

Jared

From: Johnson, Brad <bjohnson@mdot.ms.gov>
Sent: Tuesday, October 13, 2026 5:57 PM
To: Everitt, Jared H CIV USARMY CEMVK (USA) <Jared.H.Everitt@usace.army.mil>
Cc: Wodtke, Andrea R <awodtke@mdot.ms.gov>
Subject: [Non-DoD Source] FW: MVK-2026-00748 MDOT, SR 18 Bridge Replacement (10.4), Project No: STBG-0039-01(016); 109098-301000, Claiborne County, Mississippi

Jared,

You recently received a permit application below for the subject project. We need written communication from the Corps to include in the DEQ LCNOI application.

For your convenience, I've attached the impact table for this project.

What type of permit do you anticipate issuing for the project?

Thanks,

Brad

From: Regulatory MVK <Regulatory@usace.army.mil>
Sent: Tuesday, October 13, 2026 2:37 PM
To: Johnson, Brad <bjohnson@mdot.ms.gov>
Cc: Everitt, Jared H CIV USARMY CEMVK (USA) <Jared.H.Everitt@usace.army.mil>; Wodtke, Andrea R <awodtke@mdot.ms.gov>; Johnson, Adam <ajohnson@mdot.ms.gov>

Subject: MVK-2026-00748 MDOT, SR 18 Bridge Replacement (10.4), Project No: STBG-0039-01(016); 109098-301000, Claiborne County, Mississippi

SUBJECT: MDOT, SR 18 Bridge Replacement (10.4), Project No: STBG-0039-01(016); 109098-301000, Claiborne County, Mississippi

The Vicksburg District Regulatory Division is committed to providing quality and timely service to our customers. As part of this service, we are furnishing the name and contact information of the Project Manager who is working on your request.

If you have any questions or need further information concerning the Regulatory process, please feel free to contact the Project Manager below or visit our web site at: www.mvk.usace.army.mil/Missions/Regulatory.aspx.

PROJECT ID NUMBER: MVK-2026-00748

PROJECT MANAGER: Mr. Jared Everitt
Jared.H.Everitt@usace.army.mil
601-631-7104

v/r



**US Army Corps
of Engineers®**
Vicksburg District

Linda Mordecai
Workforce Management Support Specialist
U.S. Army Corps of Engineers, Regulatory Division
4155 East Clay Street
Vicksburg, MS 39183
Office: 601-631-7071
Email: Linda.C.Mordecai@usace.army.mil

Regulatory Request System (RRS): <https://rrs.usace.army.mil/>
Website: <https://www.mvk.usace.army.mil/Missions/Regulatory/>

From: Johnson, Brad <bjohnson@mdot.ms.gov>
Sent: Tuesday, October 13, 2026 1:10 PM
To: Regulatory MVK <Regulatory@usace.army.mil>
Cc: Everitt, Jared H CIV USARMY CEMVK (USA) <Jared.H.Everitt@usace.army.mil>; Wodtke, Andrea R <awodtke@mdot.ms.gov>; Johnson, Adam <ajohnson@mdot.ms.gov>
Subject: [Non-DoD Source] MDOT - Claiborne SR 18 - Replace Bridge # 10.4 - 109098-301000

Hello,

MDOT is proposing a bridge replacement project to replace bridge No. 10.4 on new alignment on SR 18 in Claiborne County. The permit application can be downloaded [here](#).

For your convenience, I've attached the waters upload sheet, but please let me know if I've done anything wrong on the spreadsheet. Also, please remember that I have bookmarks in the permit application. The bookmarks should make it a little easier while looking at the permit application. The last two bookmarks show jurisdictional features and non-jurisdictional features.

Please let me know if you have any questions or need additional information.

Thanks,

Brad

Riparian Buffer Zones

PRELIMINARY
NOT FOR
CONSTRUCTION




DESIGNED BY: RKB
DETAILED BY: ZRQ
CHECKED BY: FMT
DATE: 6/05/2026

FMS CON: 109098/301000
PROJECT NO.: STBG-0039-01(016)
COUNTY: CLAIBORNE

**RIPARIAN BUFFER
SR 18 REALIGNMENT**

SHEET ID
ECP-RB-3
SHEET NO.
28


1. HAUL ROAD AND/OR BRIDGE ARE ALLOWABLE CONSTRUCTION ACTIVITIES.
2. CONTRACTOR MAY REQUEST MODIFICATIONS TO THE CLEARING LIMITS SHOWN ABOVE AS NEEDED. ANY MODIFICATIONS REQUESTED WILL NEED TO BE SUBMITTED TO MDOT PRIOR TO PROCEEDING.

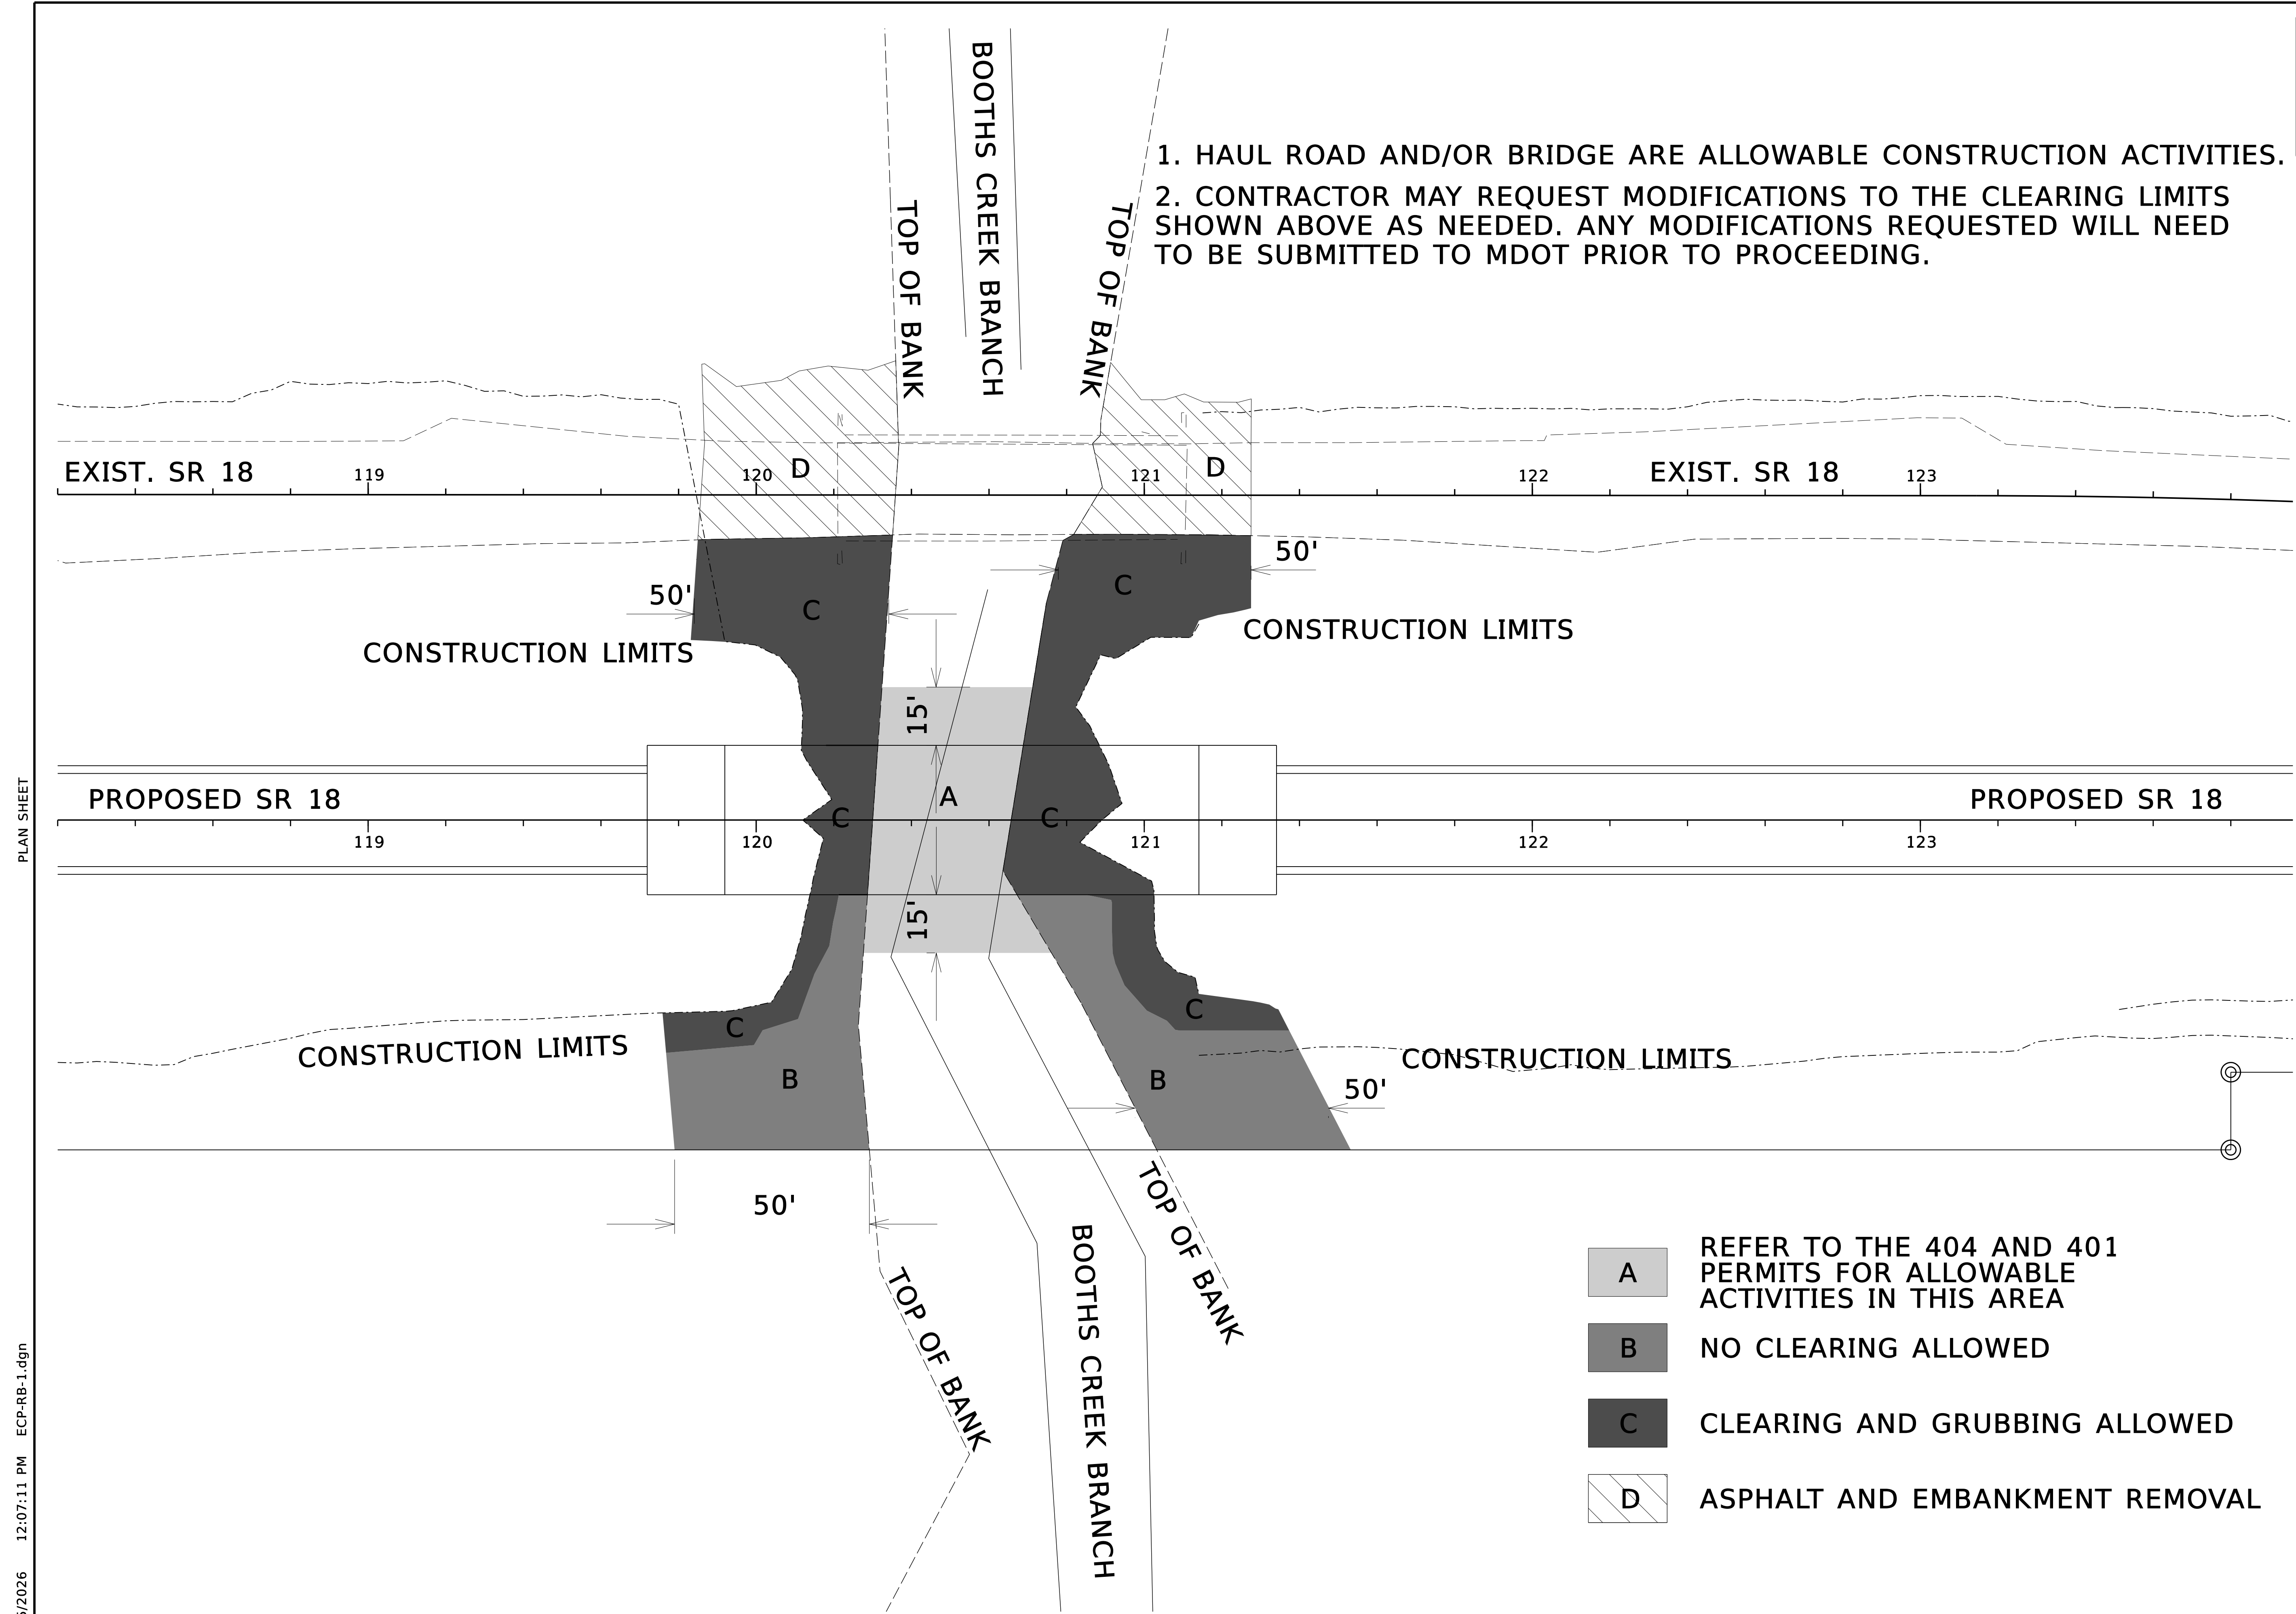

PLAN SHEET

6/5/2026 12:07:11 PM ECP-RB-1.dgn

Plans and Layout

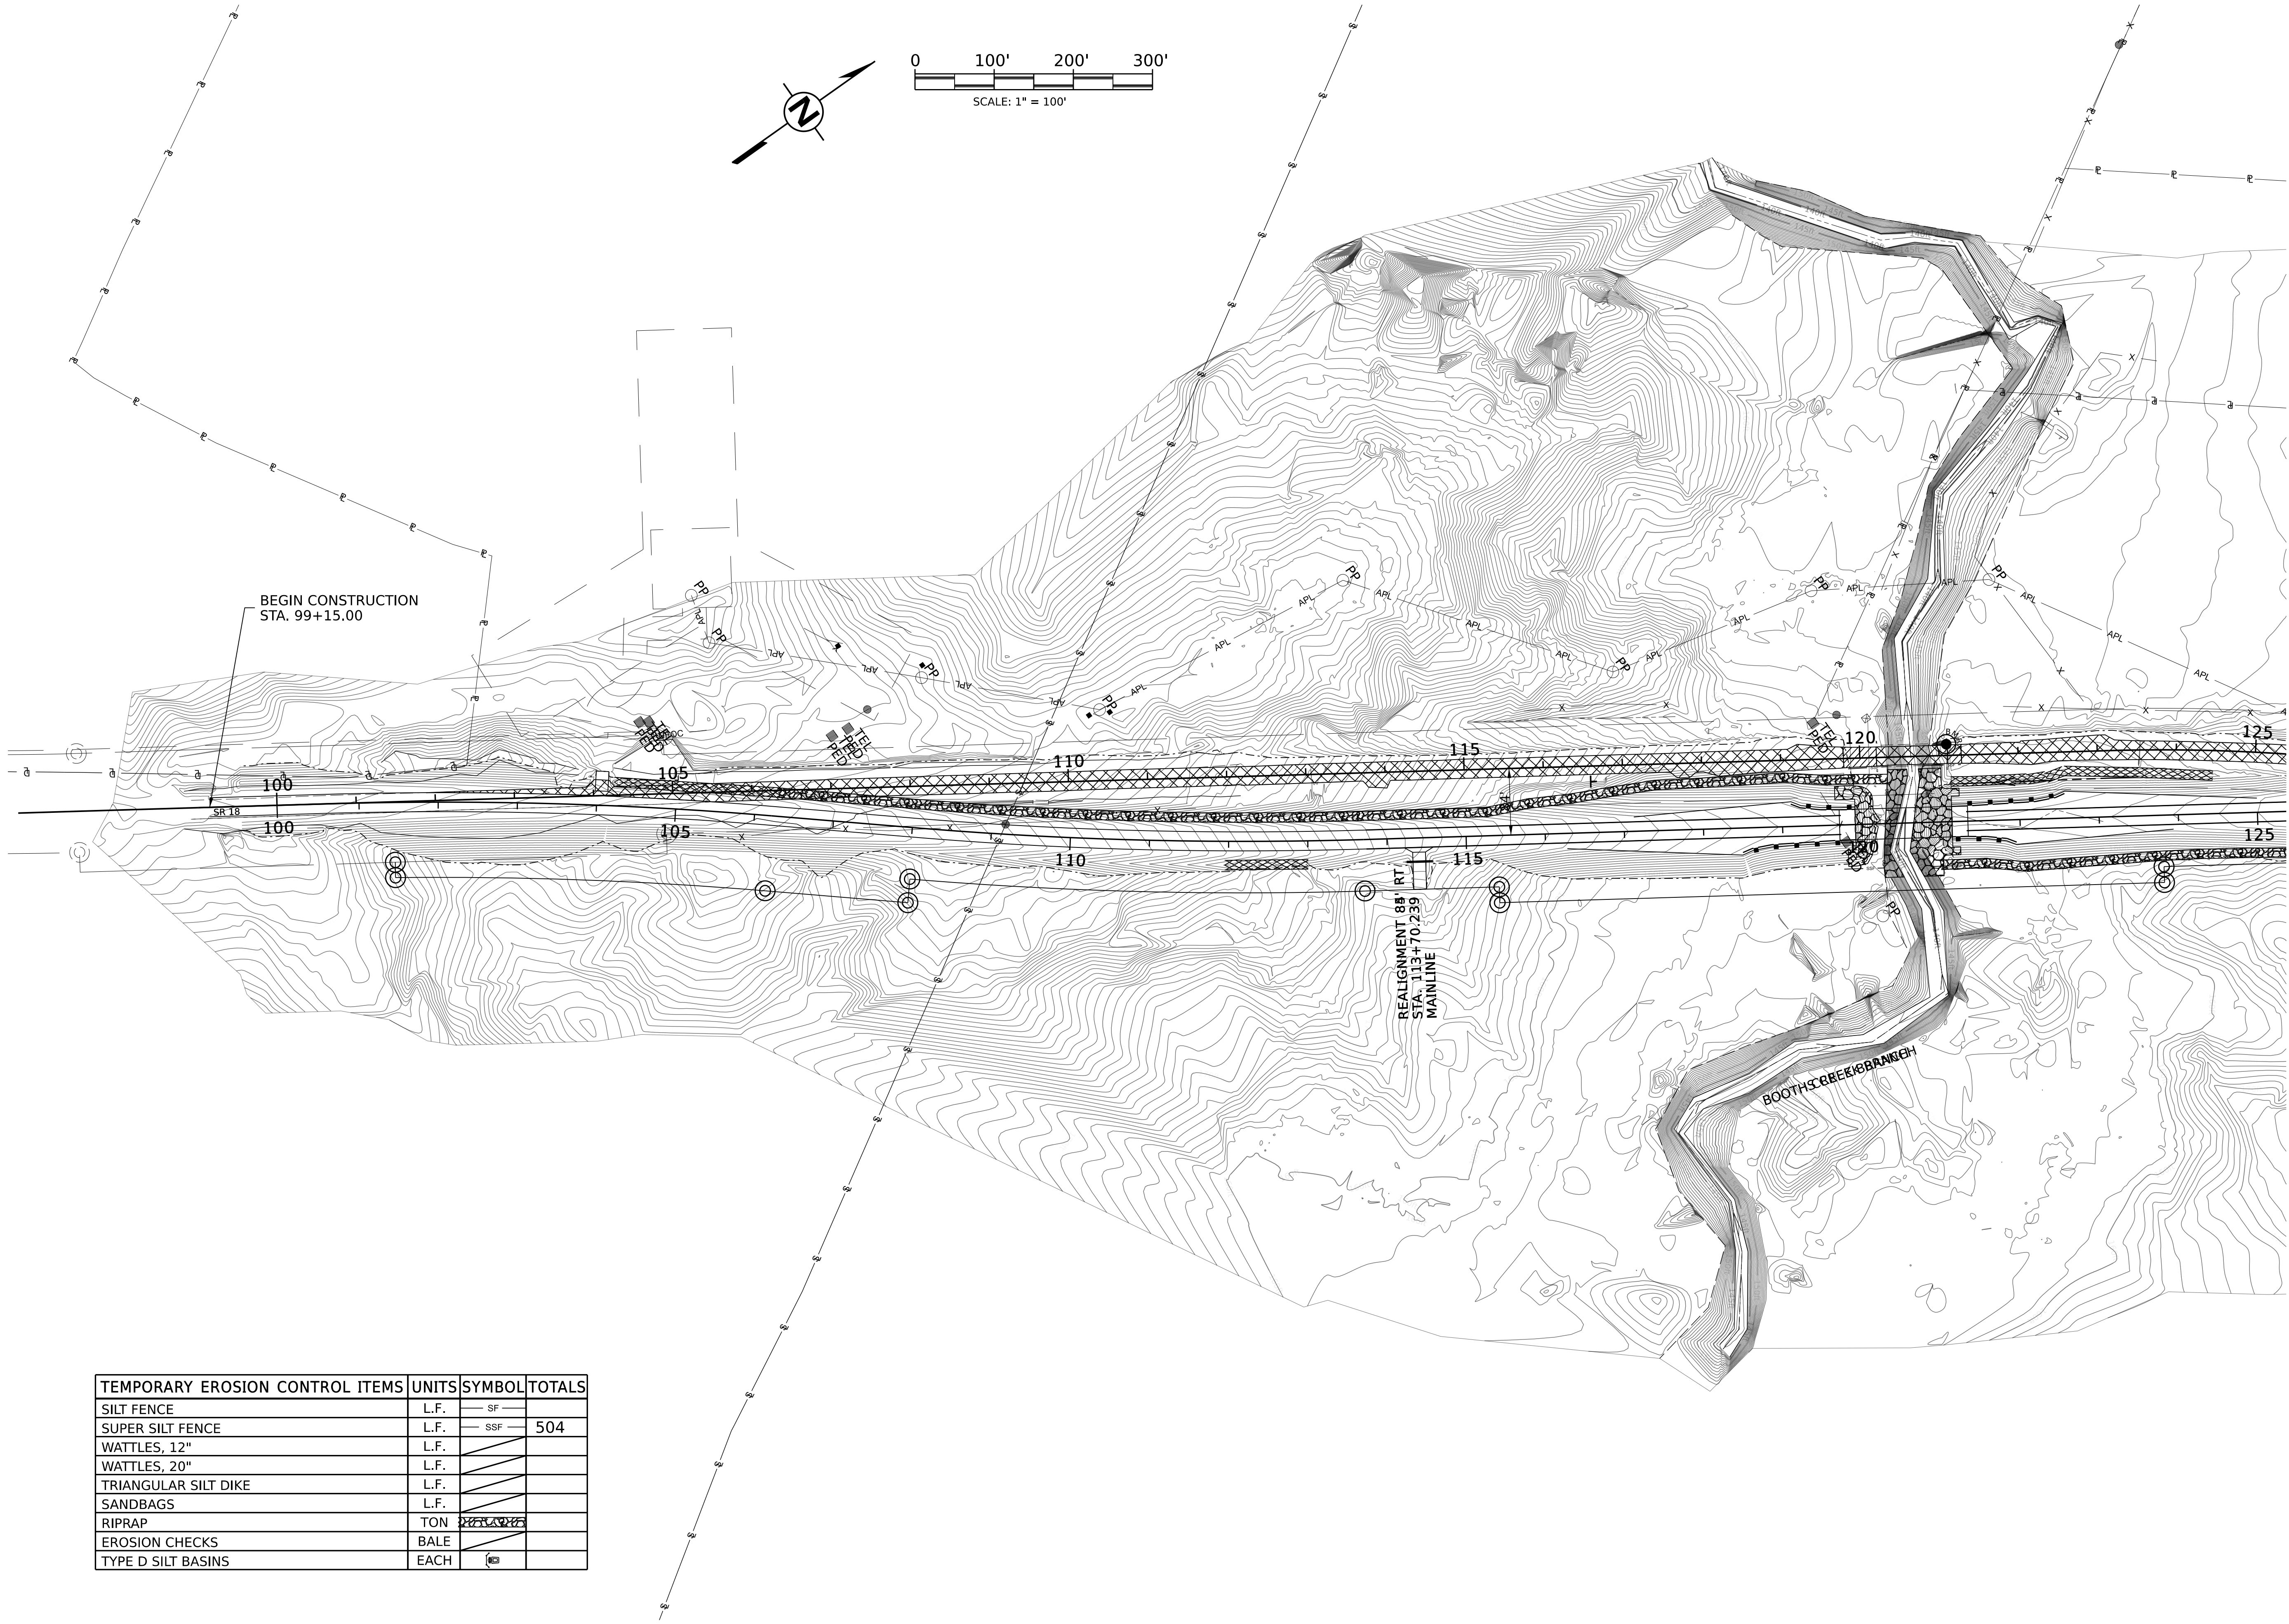




TEMPORARY EROSION CONTROL ITEMS	UNITS	SYMBOL	TOTALS
SILT FENCE	L.F.		
SUPER SILT FENCE	L.F.		504
WATTLES, 12"	L.F.		
WATTLES, 20"	L.F.		
TRIANGULAR SILT DIKE	L.F.		
SANDBAGS	L.F.		
RIPRAP	TON		285.12
EROSION CHECKS	BALE		
TYPE D SILT BASINS	EACH		

PRELIMINARY
NOT FOR
CONSTRUCTION



DESIGNED BY: RKB	FMS CON: 109098/301000
DETAILED BY: ZRQ	PROJECT NO.: STBG-0039-01(016)
CHECKED BY: FMT	COUNTY: CLAIBORNE
DATE: 6/05/2026	

EROSION CONTROL PLANS:
SR 18 REALIGNMENT
B.O.P. TO STA. 125+00

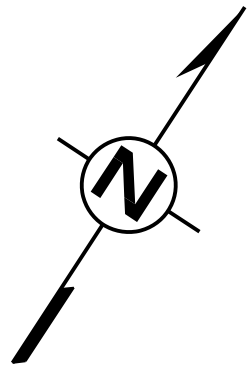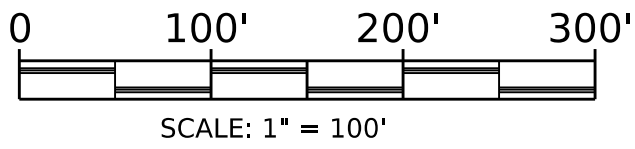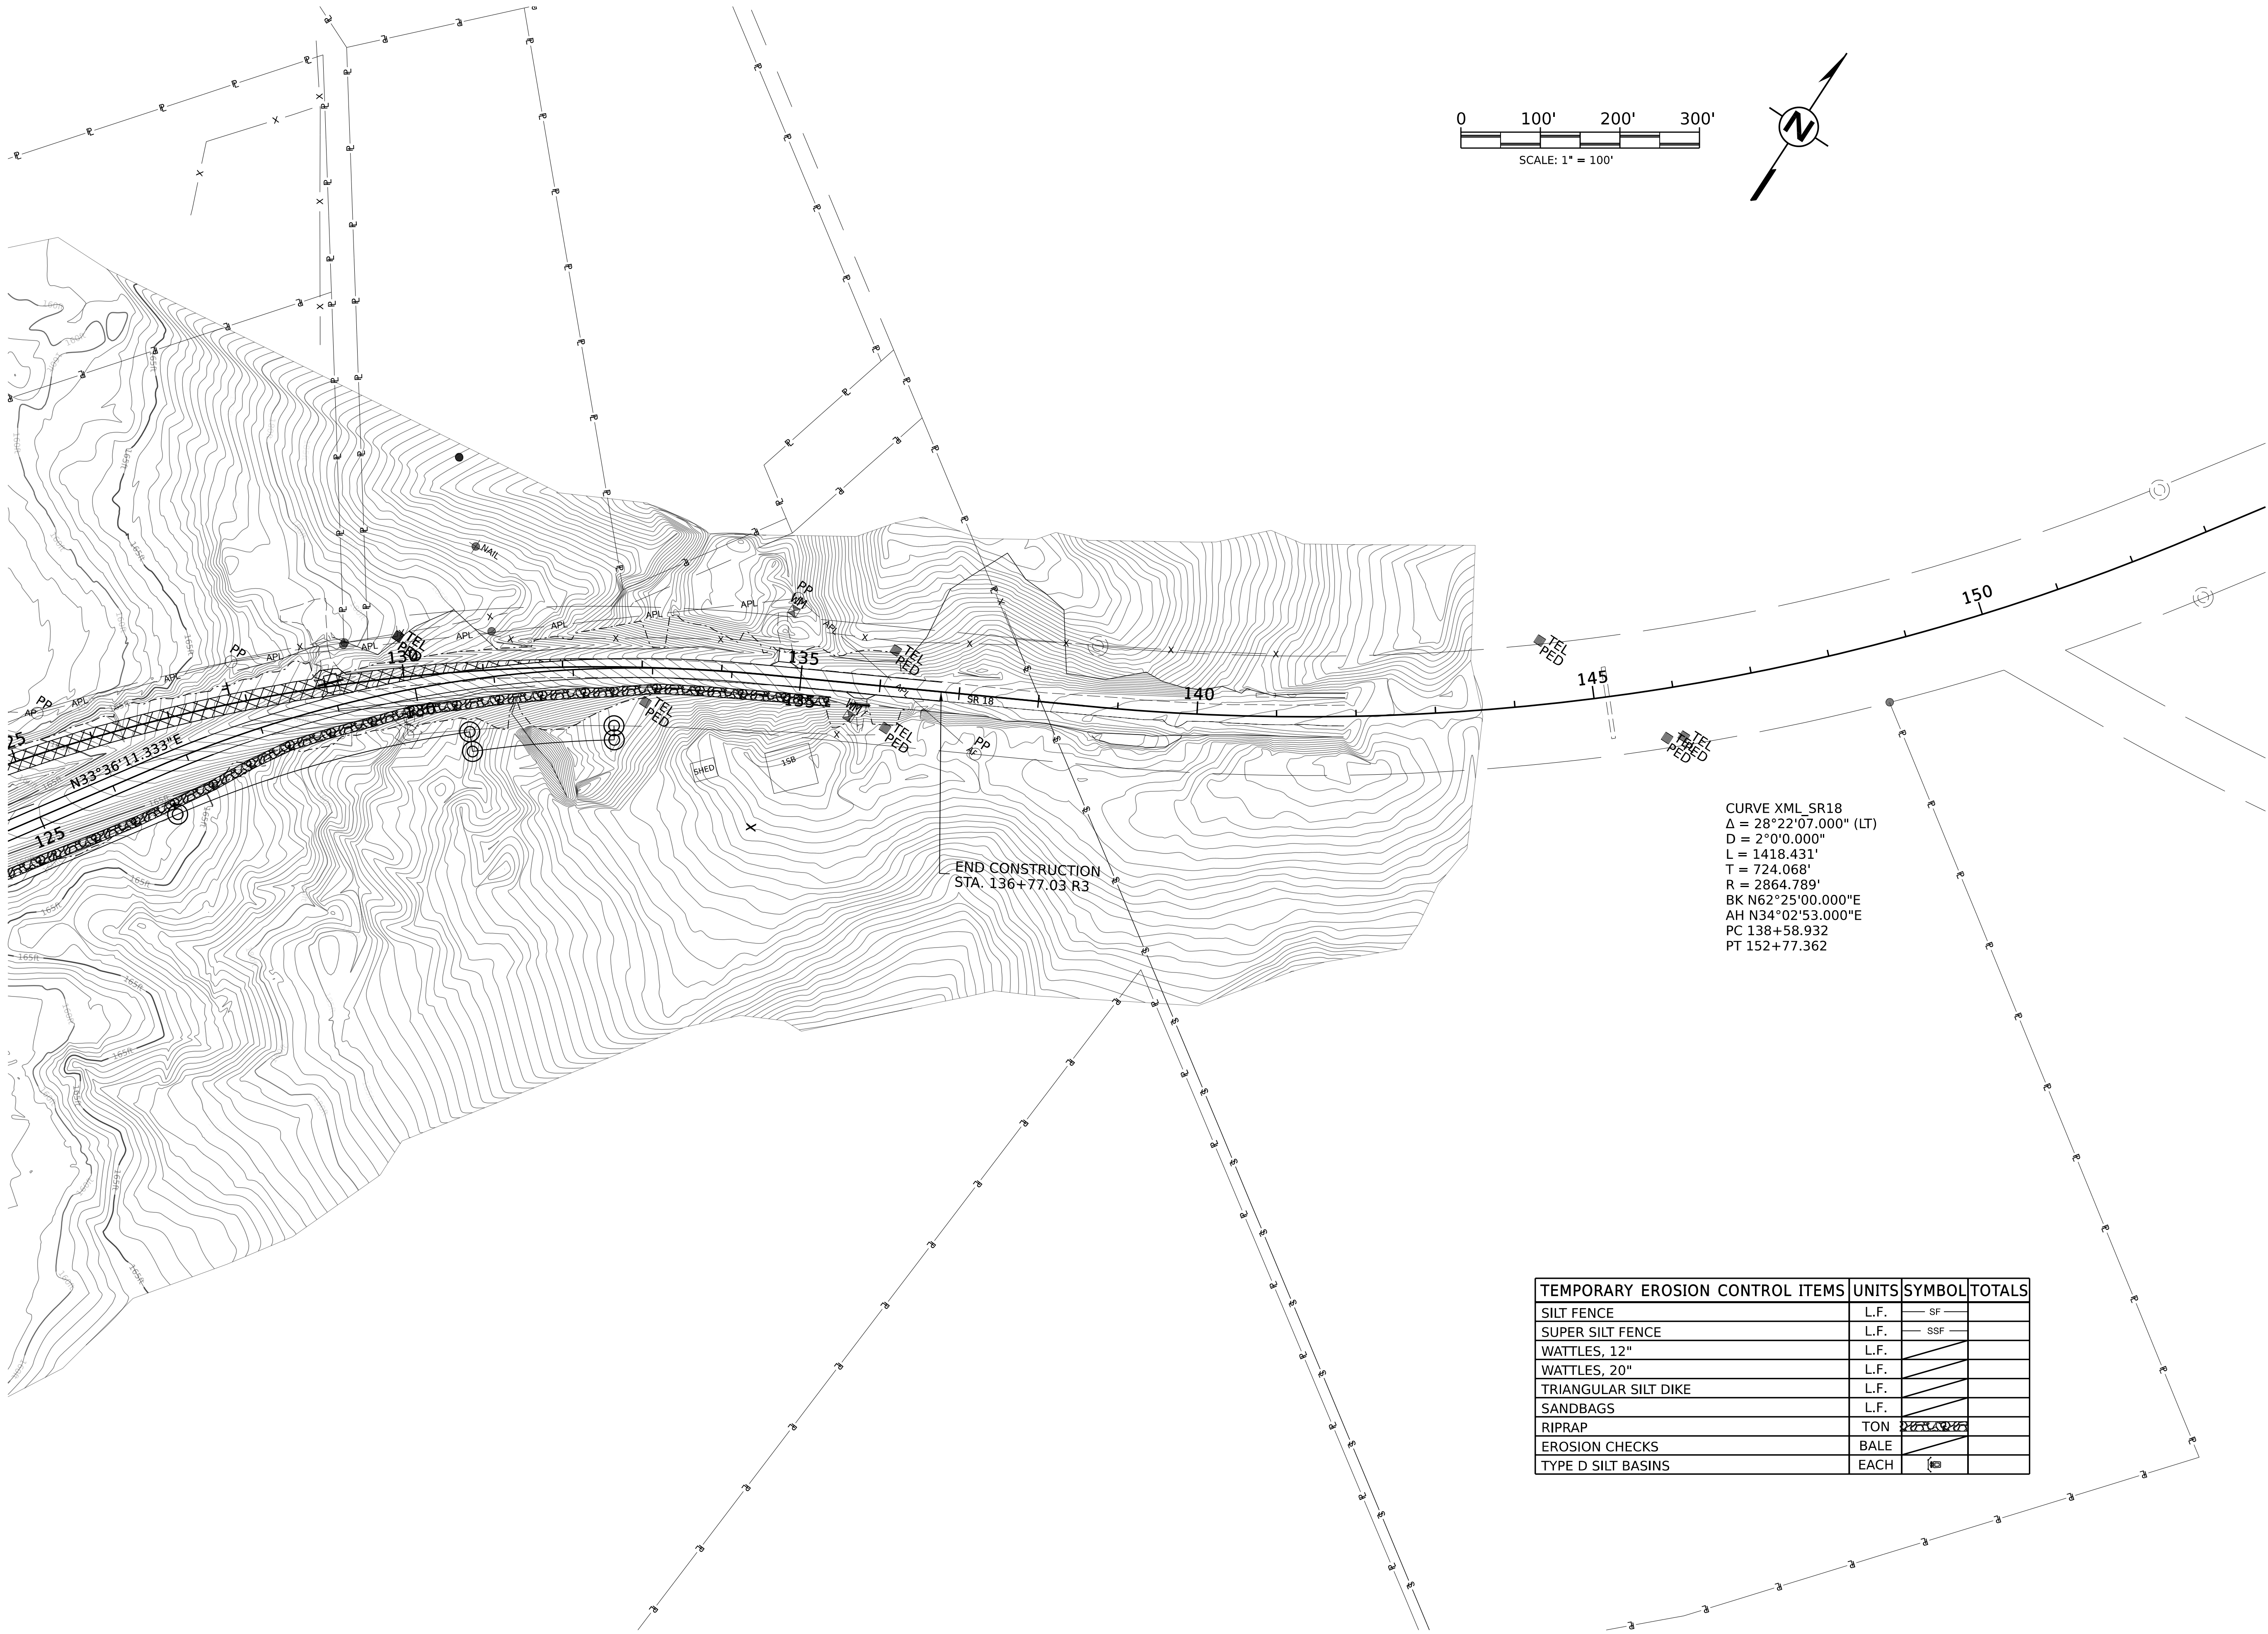

END CONSTRUCTION
STA. 136+77.03 R3

CURVE XML_SR18
Δ = 28°22'07.000" (LT)
D = 2°0'0.000"
L = 1418.431'
T = 724.068'
R = 2864.789'
BK N62°25'00.000"E
AH N34°02'53.000"E
PC 138+58.932
PT 152+77.362

TEMPORARY EROSION CONTROL ITEMS	UNITS	SYMBOL	TOTALS
SILT FENCE	L.F.		
SUPER SILT FENCE	L.F.		
WATTLES, 12"	L.F.		
WATTLES, 20"	L.F.		
TRIANGULAR SILT DIKE	L.F.		
SANDBAGS	L.F.		
RIPRAP	TON		
EROSION CHECKS	BALE		
TYPE D SILT BASINS	EACH		

PRELIMINARY
NOT FOR
CONSTRUCTION



DESIGNED BY: RKB

DETAILED BY: ZRQ

CHECKED BY: FMT

DATE: 6/05/2026

FMS CON: 109098/301000


PROJECT NO.: STBG-0039-01(016)

COUNTY: CLAIBORNE

EROSION CONTROL PLANS
SR 18 REALIGNMENT
STA. 125+00 TO E.O.P.

SHEET ID
ECP-4

SHEET NO.
29

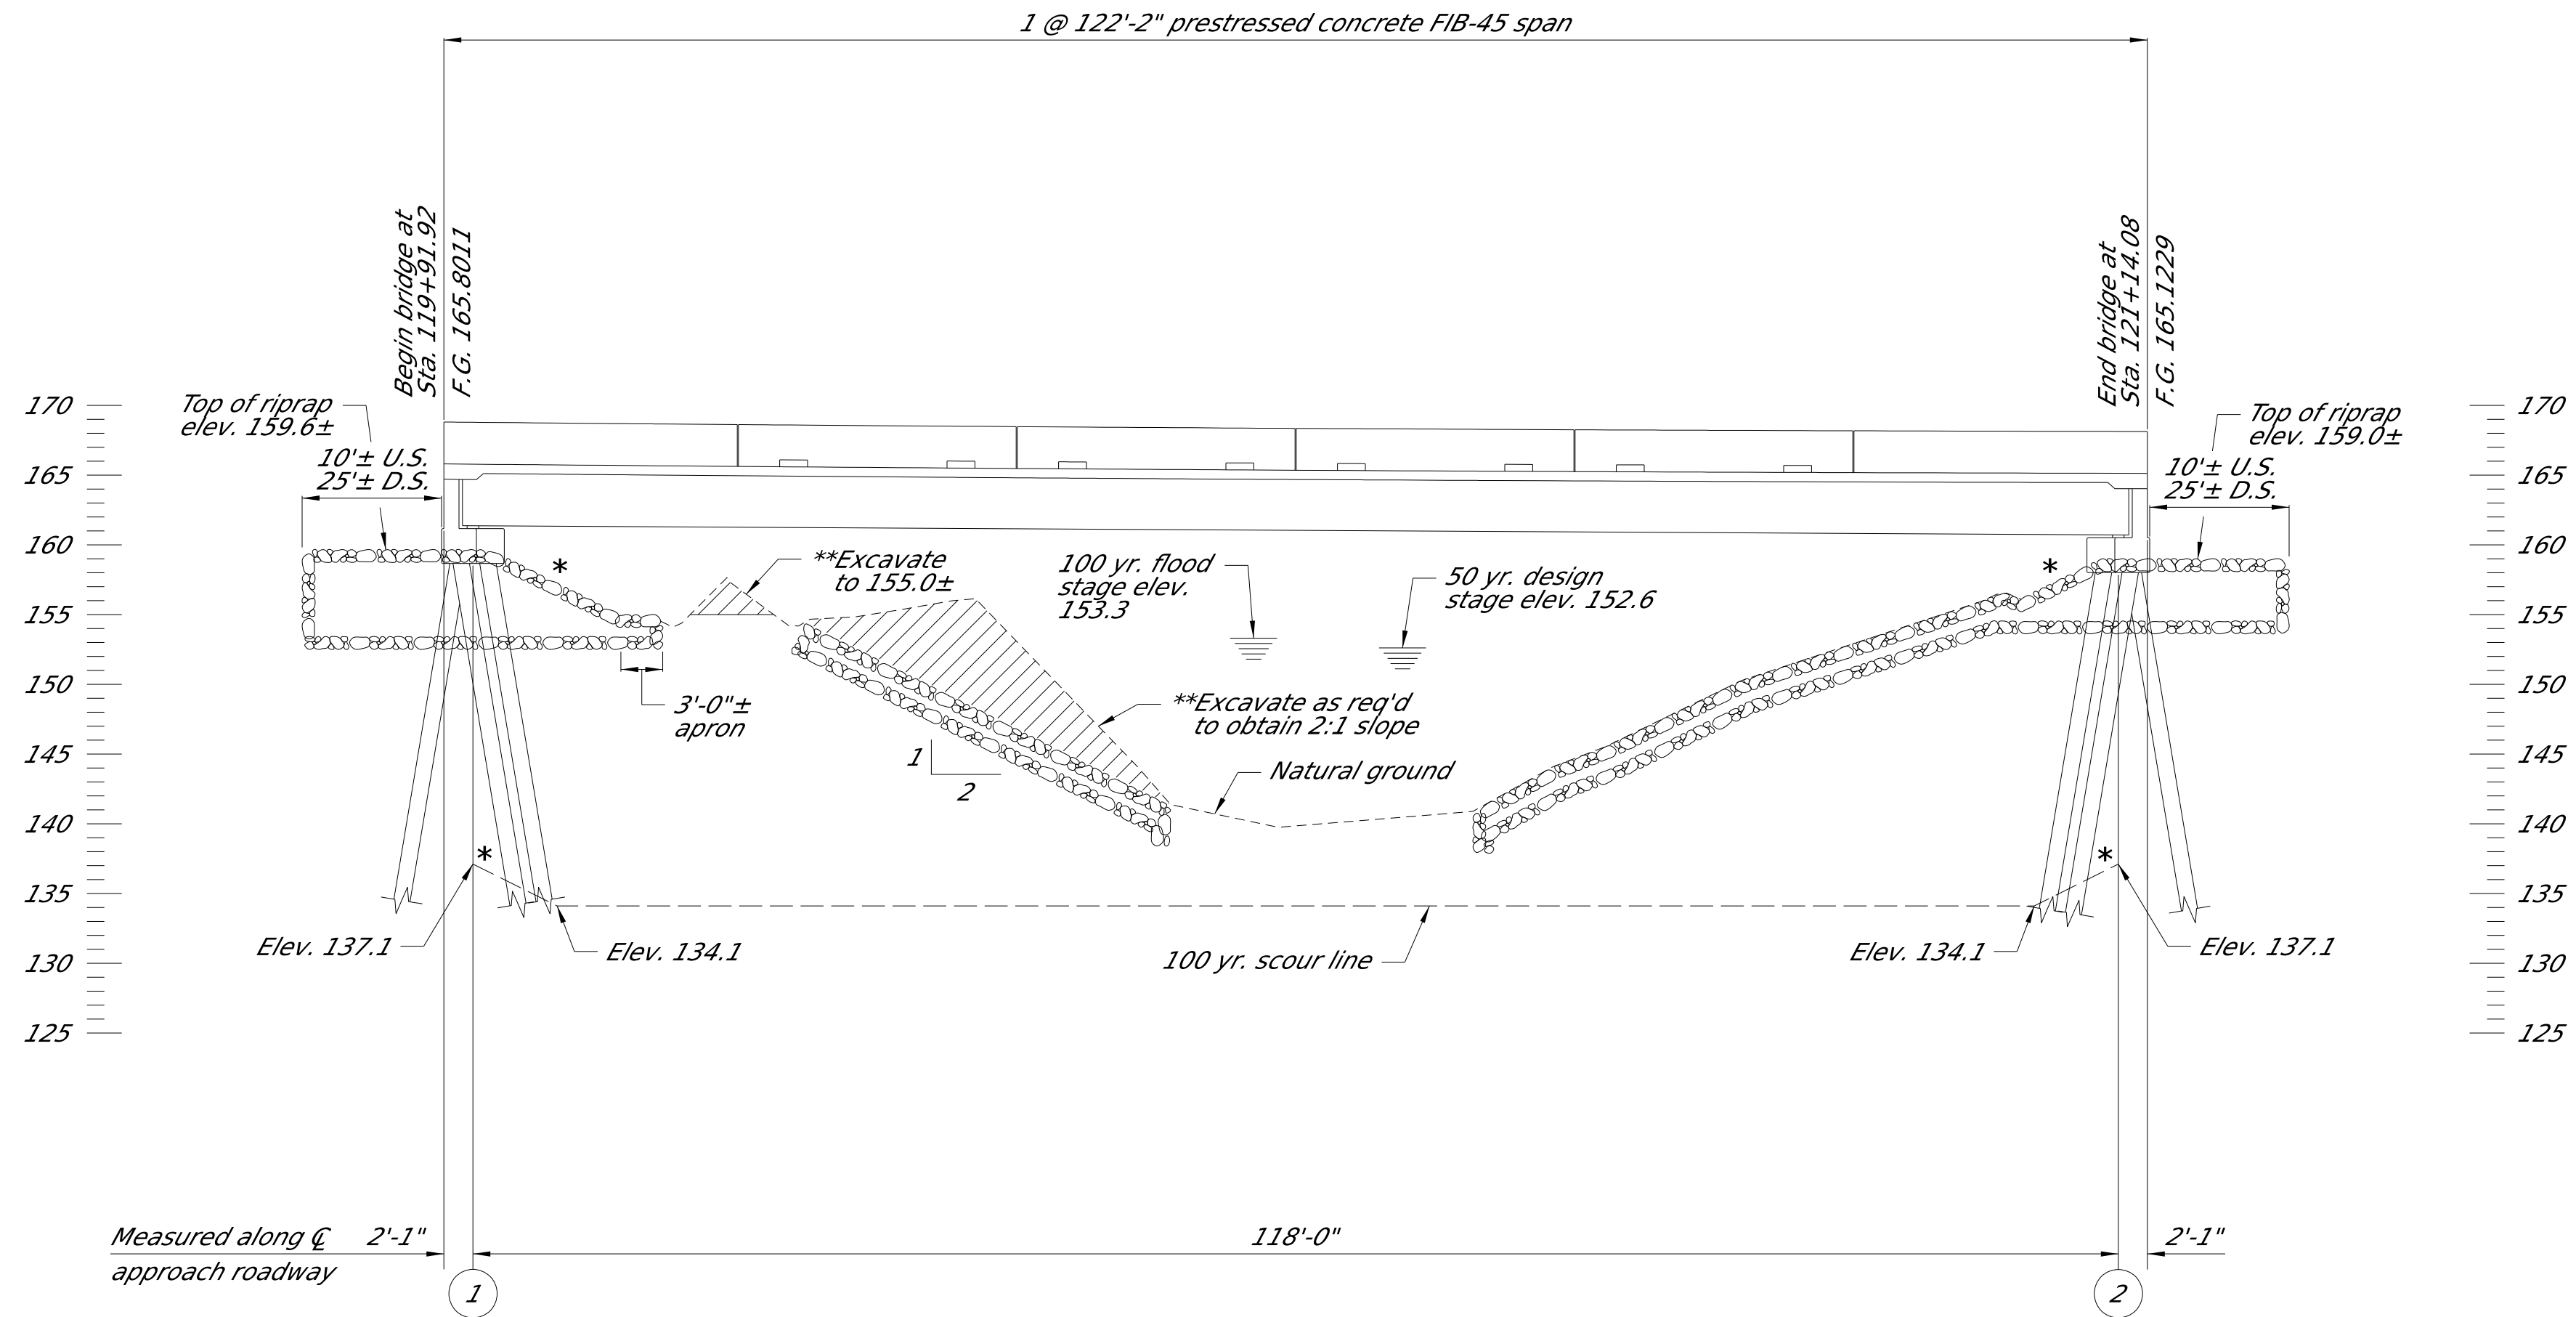

EROSION CONTROL ELEVATION

Scale: 1" = 10'-0"

NOTE:


1. No dirt can be pushed into the creek.
2. If a platform for working is needed, then riprap shall be used.
3. Minimize disturbance to existing banks.
4. If the bent is in close proximity to the banks, then riprap shall be placed prior to pile drivings.
5. Riprap shall be placed on slopes immediately after pile drivings.
6. Clearing should be kept to a minimum and grubbing only where required.
7. Turbidity curtain may be required.

*NOTE:

2:1 slope normal to end bent

**NOTE:

Required excavation is included in Roadway quantities.

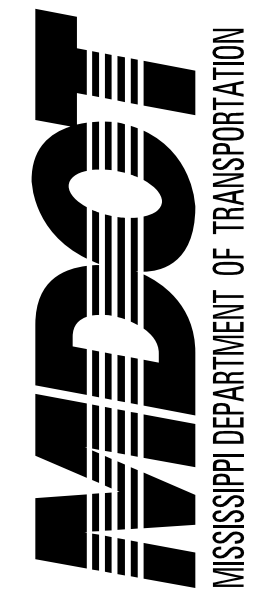

DESIGNED BY: BARRETT GERMOND

DETAILED BY: BARRETT GERMOND

CHECKED BY: SHANE WRIGHT

DATE: 2027-01-26

FMS CON: 109098/301000

PROJECT NO.: STBG-0039-01(016)



COUNTY: CLAIBORNE

BRIDGE AT STA. 119+91.92
SR 18 OVER CREEK BRANCH
EROSION CONTROL ELEVATION

DIR OF STRUCTURES, STATE BRIDGE ENGINEER - SCOTT WESTERFIELD, P.E.
 DEP. DIR OF STRUCTURES, ASST. STATE BRIDGE ENGINEER - MICAH DEW, P.E.

WK. NO.
ECBR-1

SHEET NO.
8017

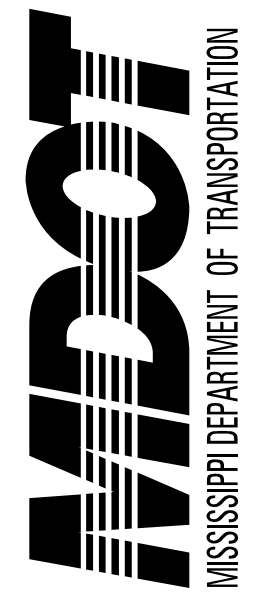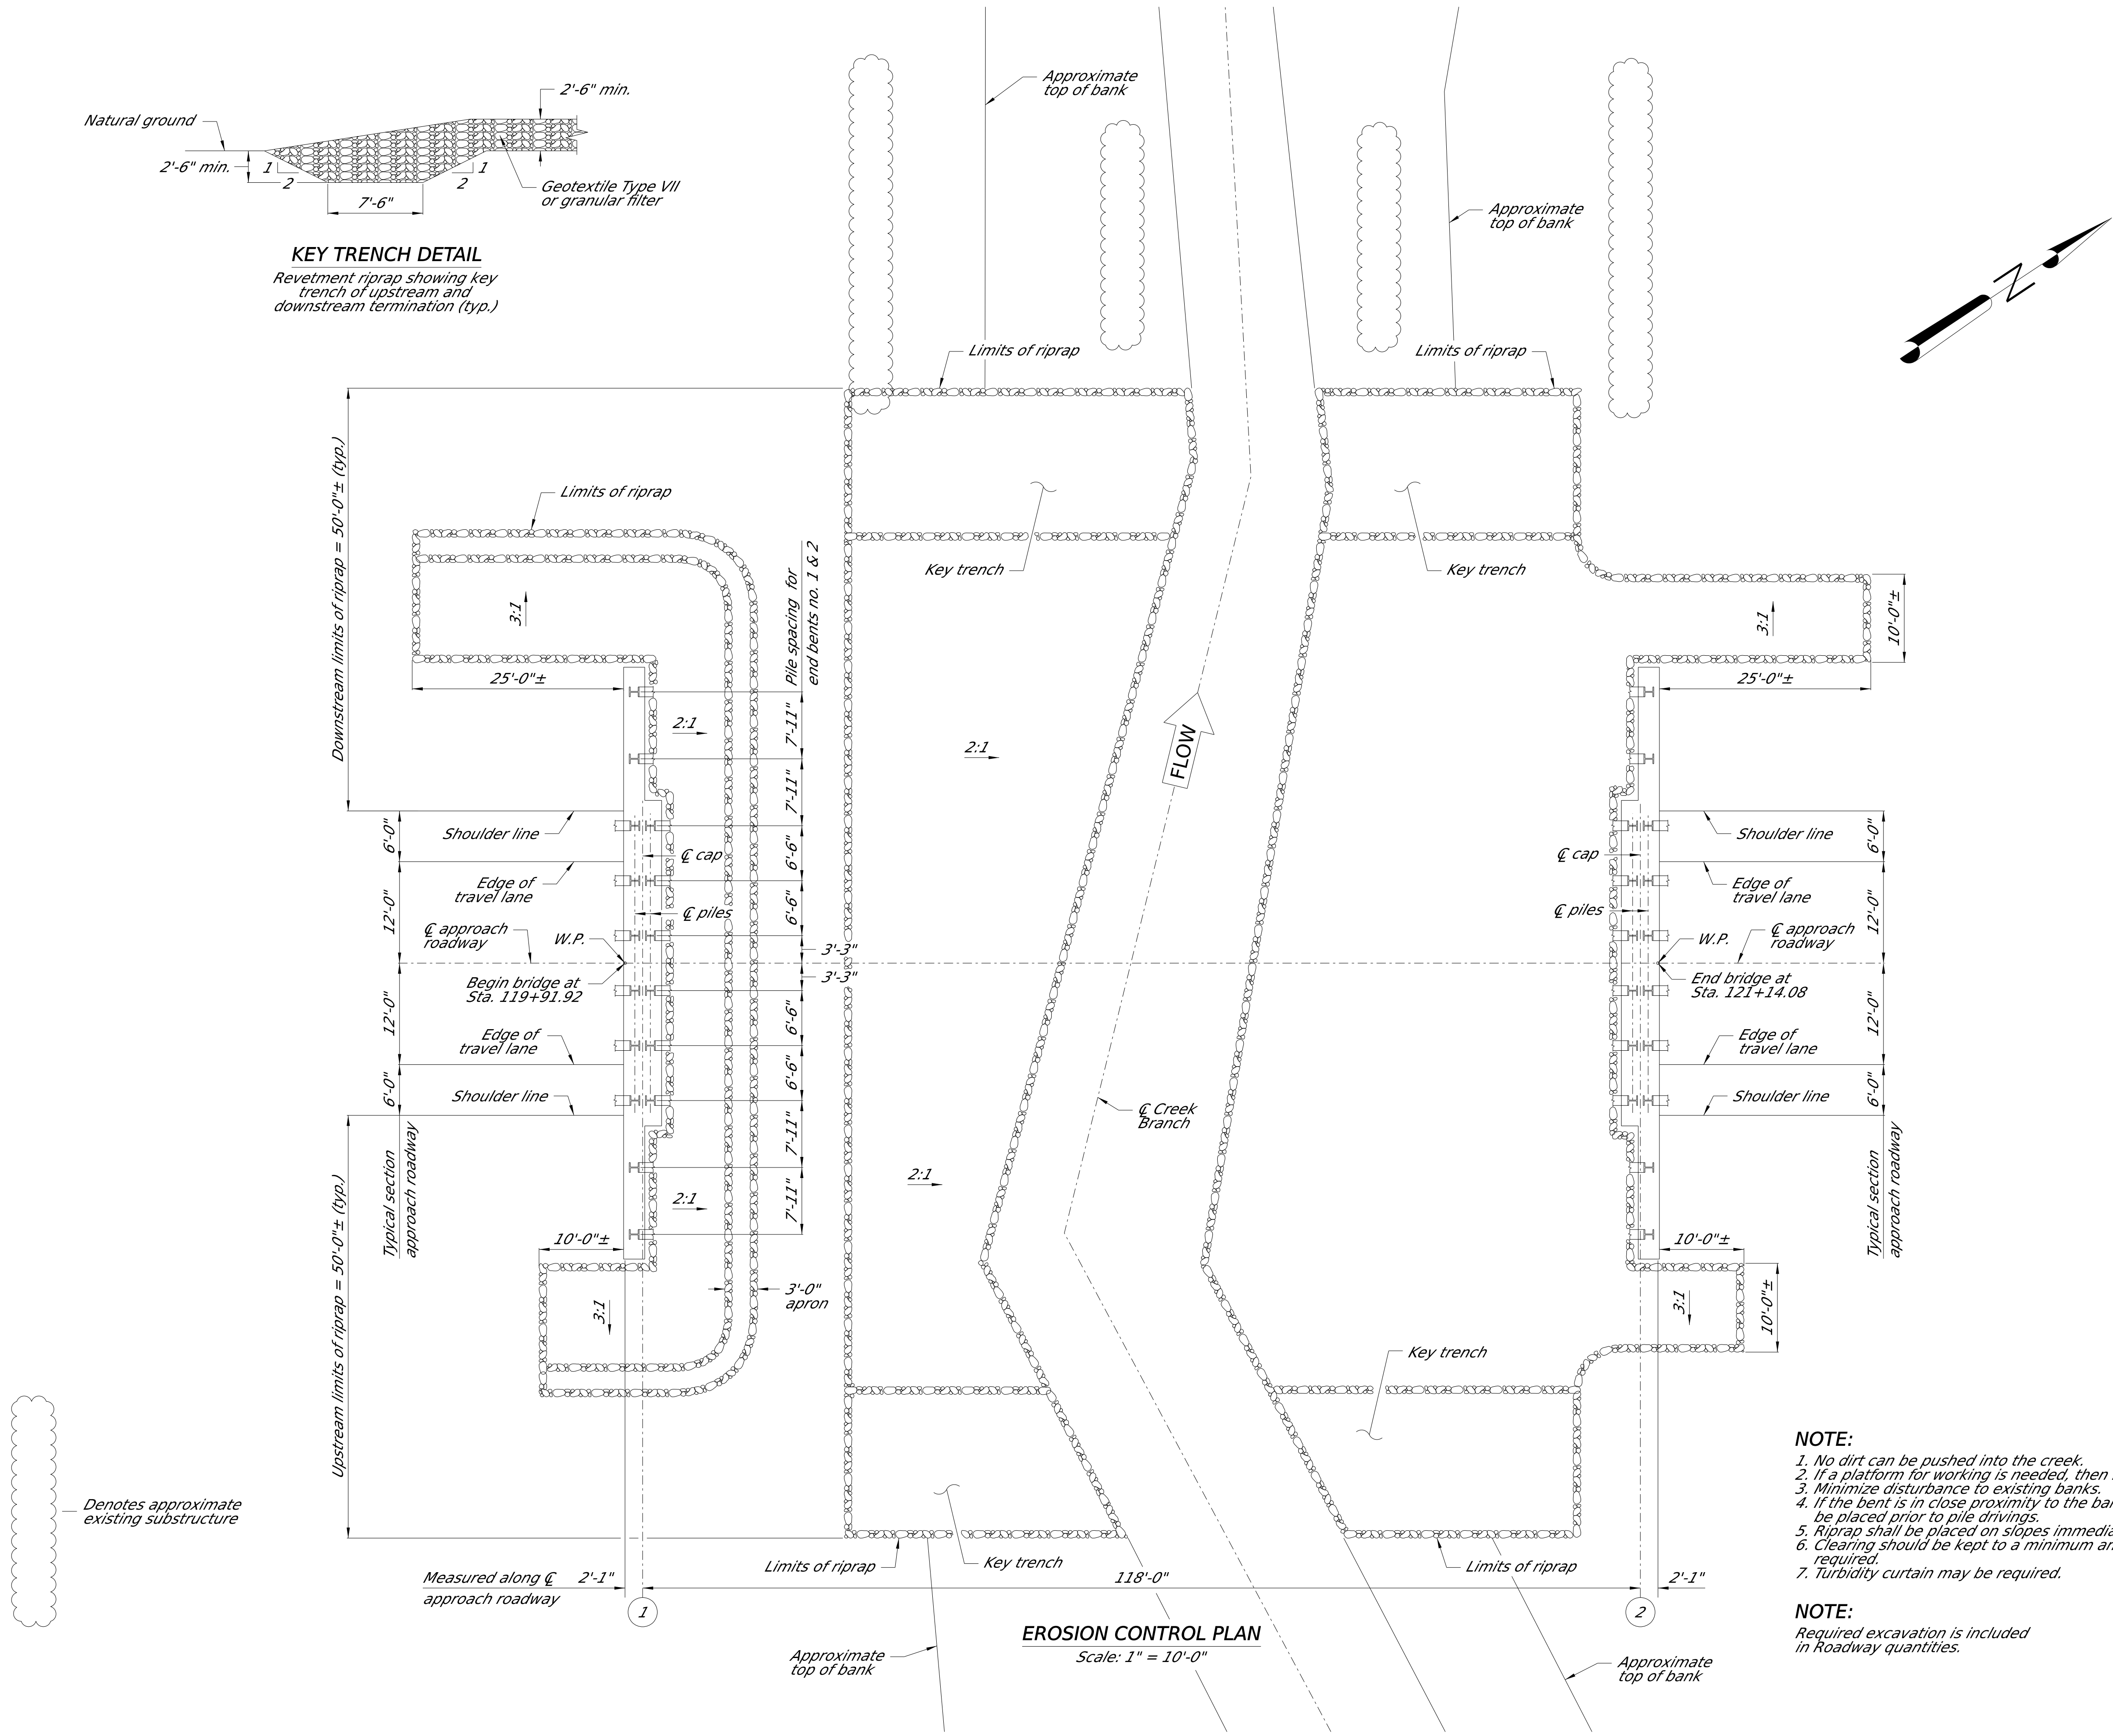

DESIGNED BY: BARRETT GERMOND
DETAILED BY: BARRETT GERMOND
CHECKED BY: SHANE WRIGHT
DATE: 2027-01-26

FMS CON: 109098/301000
PROJECT NO.: STBG-0039-01(016)
COUNTY: CLAIBORNE

BRIDGE AT STA. 119+91.92
SR 18 OVER CREEK BRANCH
EROSION CONTROL PLAN

DIR. OF STRUCTURES, STATE BRIDGE ENGINEER - SCOTT WESTERFIELD, P.E.
DEP. DIR. OF STRUCTURES, ASST. STATE BRIDGE ENGINEER - MICAH DEW, P.E.

WK. NO.
ECBR-2

SHEET NO.
8018