



TICE
ENGINEERING, INC.
ENGINEERS / SURVEYORS

Trusted Engineers. Experienced Surveyors. Innovative Results.

March 24, 2026

Mississippi Department of Environmental Quality
Office of Pollution Control - Environmental Permits Division
Attn: Carrie Barefoot
P.O. Box 2261
Jackson, MS 39225

REFERENCE: ANDURIL INDUSTRIES MCHENRY CAMPUS IMPROVEMENTS
SWPPP MAJOR MODIFICATION
MSR109425
STONE COUNTY, MISSISSIPPI

Dear Ms. Barefoot:

Enclosed is the paperwork for a major modification to Anduril's Large Construction NPDES permit MSR109425. The initial permit was issued for construction of the renovation and expansion of driveways, parking lots, and facility buildings which disturbed approximately 13.8 acres of Anduril's property. Construction of this phase of improvements is nearing completion with closeout expected in Summer 2026.

Anduril is now submitting a major modification of the SWPPP for Phase 3 of the site construction. As part of Phase 3, Anduril will grade and construct a new fire station and parking lot for the campus. Phase 3 increases the total disturbed area to 16.49 acres, an increase of 2.69 acres from the previous SWPPP. Phase 1 disturbance area will phase out with the completion of the main entrance renovations in Summer 2026, leaving the 2.69 acres of disturbed area associated with the fire station and parking area through early 2027.

Should you have any questions concerning this modification, please do not hesitate to contact me.

Sincerely,
TICE ENGINEERING, INC.

Michelle Gill, E.I.
Project Engineer

Enclosures

AI: 81501

Rec'd via email:
03/25/2026



**MAJOR MODIFICATION FORM
FOR LARGE CONSTRUCTION GENERAL PERMIT**
Coverage No. MSR10 9 4 2 5 County Stone

INSTRUCTIONS

Coverage recipients shall notify the Mississippi Department of Environmental Quality (MDEQ) at least 30 days in advance of the following activities (check all that apply). This form should be submitted with a modified Storm Water Pollution Prevention Plan (SWPPP), updated USGS topographic map, Corps of Engineers Section 404 documentation and wastewater collection and treatment information, as appropriate.

- SWPPP details have been developed and are being submitted for MDEQ review for subsequent phases of an existing project.
- "Footprint" identified in the original LCNOI is proposed to be changed.

This form must be signed by the current coverage recipient under Mississippi's Large Construction General Permit. A different developer of new phases of existing subdivisions must apply for separate permit coverage through the submittal of a new complete LCNOI package. Coverage recipients are authorized to discharge storm water associated with proposed expansions of existing subdivisions or subsequent phases, under the conditions of the General Permit, only upon receipt of written notification of approval by MDEQ. All other modifications, such as changes of erosion and sediment controls used, must be in accordance with ACT6, S-1 (6) and S-2 (7) of the General Permit.

ALL INFORMATION MUST BE COMPLETED (indicate "N/A" where not applicable)

CURRENT COVERAGE RECIPIENT INFORMATION

COVERAGE RECIPIENT CONTACT NAME: Jay Fischer PHONE # (949) 845-5748
 COMPANY NAME: Anduril Industries, Inc.
 STREET OR P.O. BOX: 1400 Anduril
 CITY: Costa Mesa STATE: CA ZIP: 92626 E-MAIL: jfischer@anduril.com
 IS THE APPLICANT DIFFERENT FROM THE CURRENT COVERAGE HOLDER? YES NO

PREPARER/CONSULTANT INFORMATION
(Complete if prepared by someone other than applicant.)

PREPARER/CONSULTANT CONTACT NAME: W. Ryan Tice PHONE # (601) 928-4121
 COMPANY NAME: Tice Engineering
 STREET OR P.O. BOX: 510 S. Vardaman Street
 CITY: Wiggins STATE: MS ZIP: 39577 E-MAIL: ryan.tice@ticeeng.com
 MAY MDEQ CORRESPOND DIRECTLY WITH THE PREPARER / CONSULTANT REGARDING THE PROPOSED PROJECT / MODIFICATION? YES NO

SITE INFORMATION

PROJECT NAME: Anduril Industries - New Fire Station and Gravel Parking Lot
 CITY: McHenry TRIBAL LAND ID (N/A If not applicable): N/A
Latitude / Longitude Collected at Project Entrance or Construction Start Point:
 LATITUDE: 30 degrees 42 minutes 6.7 seconds LONGITUDE: 89 degrees 5 minutes 40.3 seconds
 LAT & LONG COLLECTION METHOD (e.g., GPS, Map Interpolation): GPS
 REDUCTION IN ACREAGE: _____ ADDITIONAL ACREAGE TO BE DISTURBED: 2.69
 TOTAL PROJECT ACREAGE: 16.49 ESTIMATED CONSTRUCTION END DATE: January 2027

IS THE PROJECT REROUTING, FILLING OR CROSSING A WATER CONVEYANCE OF ANY KIND? (If yes, contact the U.S. Army Corps of Engineers' Regulatory Branch for permitting requirements.) YES NO

IF THE PROJECT IS A SUBDIVISION OR A COMMERCIAL DEVELOPMENT, HOW WILL SANITARY SEWAGE BE DISPOSED? Check one of the following and attach the pertinent documents.

Existing Municipal or Commercial System. Please attach plans and specifications for the collection system and the associated "Information Regarding Proposed Wastewater Projects" form or approval from County Utility Authority in Hancock, Harrison, Jackson, Pearl River and Stone Counties. If the plans and specifications cannot be provided at the time of LCNOI submittal, MDEQ will accept written acknowledgement from official(s) responsible for wastewater collection and treatment that the flows generated from the proposed project can and will be transported and treated properly. The letter must include the estimated flow.

Collection and Treatment System will be Constructed. Please attach a copy of the cover of the NPDES discharge permit from MDEQ or indicate the date the application was submitted to MDEQ (Date: _____.)

Individual Onsite Wastewater Disposal Systems for Subdivisions Less than 35 Lots. Please attach a copy of the Letter of General Acceptance from the Mississippi State Department of Health or certification from a registered professional engineer that the platted lots should support individual onsite wastewater disposal systems.

Individual Onsite Wastewater Disposal Systems for Subdivisions Greater than 35 Lots. A determination of the feasibility of installing a central sewage collection and treatment system must be made by MDEQ. A copy of the response from MDEQ concerning the feasibility study must be attached. If a central collection and wastewater system is not feasible, then please attach a copy of the Letter of General Acceptance from the State Department of Health or certification from a registered professional engineer that the platted lots should support individual onsite wastewater disposal systems.

INDICATE ANY LOCAL STORM WATER ORDINANCE WITH WHICH THE PROJECT MUST COMPLY:

NEAREST NAMED RECEIVING STREAM: Saucier Creek

IS RECEIVING STREAM ON MISSISSIPPI'S 303(d) LIST OF IMPAIRED WATER BODIES? (The 303(d) list of impaired waters and TMDL stream segments may be found on MDEQ's web site: <https://www.mdeq.ms.gov/water/surface-water/tmdl/>) YES NO

HAS A TMDL BEEN ESTABLISHED FOR THE RECEIVING STREAM SEGMENT? YES NO

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Signed by: Jay Fischer
4D3CA46F08E54B3
 Signature (must be signed by coverage recipient)

3/24/2026
 Date

Jay Fischer
 Printed Name

Principal Construction Project Manager
 Title

Please submit this form to: Chief, Environmental Permits Division
 Office of Pollution Control
 MS Department of Environmental Quality
 P.O. Box 2261
 Jackson, Mississippi 39225

Electronically: <https://www.mdeq.ms.gov/construction-stormwater/>

STORM WATER POLLUTION PREVENTION PLAN

for

PHASE 3



ANDURIL - MCHENRY CAMPUS

FIRE STATION & PARKING LOT

MARCH 2026



PREPARED FOR:

**ANDURIL INDUSTRIES ROCKET MOTOR SYSTEMS
STONE COUNTY, MISSISSIPPI**

PREPARED BY:



REVISED: MARCH 20, 2026

TABLE OF CONTENTS

- I. General Description of Project
- II. Site Information
- III. Erosion and Sediment Controls
- IV. Maintenance During Construction
- V. Staff Training
- VI. Reporting Requirements
- VII. Post Construction Controls
- VIII. Housekeeping Practices
- IX. Non-Storm Water Discharge Management
- X. Final Stabilization
- XI. Appendix
 - A. Site Location Map
 - B. Implementation Sequence
 - C. Maintenance Plan
 - D. Inspection Report and Certification Form
 - E. Erosion Control Details

I. General Description of Project

Phase 3 of this project consists of grading and construction of a new 2,970 SF fire station, gravel parking lot, and related infrastructure. Anduril began redevelopment of 12.8 acres of the camp entrances in preparation for future growth and expansion of the campus. Phase 3 will begin with the construction of the new fire station and gravel parking lot and will continue with the future construction of multiple structures throughout the campus. A proposed Phase 3 master plan is attached in the appendix. The entire McHenry campus of Anduril is located in Stone County, Mississippi.

This portion of Phase 3 construction consists of grading an additional 2.69 acres for construction of a new fire station and gravel parking lot. The parking lot will begin as a lay-down yard for the fire station construction and will eventually be transitioned to a parking lot for use by campus personnel as the facility continues to expand.

The current total disturbed area for projects under the MSR109425 permit will be Phase 1 and Phase 2 is 16.49 acres.

II. Site Information

The project site is located south of East McHenry Road approximately two and a quarter (2.25) miles east of U.S. Highway 49 (Latitude 30°42'6.11" N, Longitude - 89°05'40.5W). A site location map is enclosed in Appendix A. The site is well drained.

III. Erosion and Sediment Controls

The latest edition of the Mississippi "Erosion Control, Sediment Control and Stormwater Management on Construction Sites and Urban Areas" manual will be used as the guideline for the Stormwater Pollution Prevention Plan for the proposed project. Each Construction Contractor and Subcontractor will be required to use the applicable sections of the manual for erosion and sedimentation control.

The following are minimum best management practices (BMPs) required for this project location:

1. Topsoil should be plated in areas that will be re-vegetated. When final grade is reached it should be distributed to a minimum depth of two (2) inches on 3:1 slopes and four (4) inches on flatter slopes.
2. Permanent grassing or solid sod should be placed in areas where final grade is reached and topsoil has been plated. Permanent grassing or solid sod should be properly maintained until established.
3. Temporary grassing shall be placed where construction activity (i.e., clearing, grading, excavating or other land disturbing activities) temporarily ceases for

more than 14 days will be stabilized with temporary seeding and mulch immediately, but no later than the next work day.

4. Heavy equipment use in re-vegetated areas should be avoided. If compaction cannot be avoided, the top four (4) inches of soil bed should be tilled before re-vegetation. Any necessary fertilizer or soil amendments should be added during the tilling process.
5. Construction entrances/exits shall be installed wherever traffic will be leaving a construction site and moving directly onto a paved public road. Restrict vehicle to properly designed exit points. Use appropriate stabilization techniques at all points that exit onto paved roads. Implement additional track-out controls as necessary to ensure that sediment removal occurs prior to vehicle exit. Where sediment has been tracked-out from the site onto paved roads, sidewalks, or other paved areas outside the site, remove deposited sediment "immediately" by the end of the next work day. Remove the track-out by sweeping, shoveling, or vacuuming these surfaces, or by similarly effective means of sediment removal. Hosing or sweeping track-out sediment into any stormwater conveyance, storm drain inlet, or Waters of the State is prohibited.
6. Construction of detention basins to collect stormwater runoff and allow sediment to settle out prior to discharge shall be constructed before any major site grading can occur.

In addition to the BMPs listed above, the following BMPs should be used independently or in combination with other BMPs to provide erosion and sedimentation control for the site:

1. Silt fences will be erected and maintained at the toe of slopes and along the top of banks. Silt fence should also be erected and maintained on all drainage leaving the work area until completion of construction activities and permanent grass cover is established.
2. Wattles and riprap check dams may be installed at the direction of the engineer to decrease sediment from leaving the project site and entering waters of the state of Mississippi.
3. Storm drains and inlets will be protected with wattles, sand bags and/or gravel and will be removed once the inlet areas are paved or permanently grassed.
4. Perimeter fencing shall be maintained throughout the life of the project.
5. Construction activities shall be scheduled or sequenced so as to concentrate work in certain areas to minimize the amount of soil that is exposed at one time.

All sedimentation and erosion control measures and housekeeping practices shall be in full compliance with Mississippi's "Erosion Control, Sediment Control and Stormwater Management on Construction Sites and Urban Areas".

The contractor shall be required to minimize the amount of disturbed area through the phasing of work. The contractor shall be required to "stabilize disturbed areas prior to opening up additional sections of the project. "Stabilized" shall be when the disturbed area has been grassed, either temporary or permanent, and mulched according to the specifications. Disturbed area shall include roadbeds, slopes, and other remaining areas within the project limits.

IV. Maintenance During Construction

Construction will not begin until adequate erosion control measures are in place. A construction sequence is included in Appendix B. These measures will generally consist of silt fence, and straw wattles. These measures shall remain in place during construction. Any disturbed or damaged control measures shall be repaired or replaced immediately. A maintenance plan is included as Appendix C.

1. At least once a week and after each storm event of 0.5 inches or greater, erosion and sediment controls shall be inspected for possible repair/replacement needs.
2. Sediment from silt fences will be removed when accumulated sediment has reached 33 to 50 percent capacity.
3. Silt fences will be inspected for depth of sediment, tears, to see if the fabric is securely attached to fence posts, and to see that the fence posts are firmly in the ground at each inspection.
4. Temporary and permanent seeding will be inspected for bare spots, washouts, and healthy growth.

Permanent grassing of the project area shall commence as soon as practical. All grassed areas shall be maintained to an acceptable level until the construction is completed.

V. Staff Training

A stormwater team will be formed to carry out compliance activities associated with the requirements of the permit. The team will be trained in compliance requirements associated with the stormwater permit along with being assigned specific responsibilities with respect to those requirements. Specific responsibilities to assigned include:

1. Personnel who are responsible for the design, installation, maintenance, and/or repair of stormwater controls (including pollution prevention controls).

2. Personnel responsible for the application and storage of treatment chemicals, if applicable.
3. Personnel who are responsible for conducting inspections as required by the permit.
4. Personnel who are responsible for taking corrective actions as required by the permit.

The team shall understand the requirements of the stormwater permit and the responsibilities of assigned duties, including:

1. Deadlines associated with installation, maintenance, and removal of stormwater controls and stabilization.
2. The location of all stormwater controls on site required by this permit and how they are to be maintained.
3. The proper procedures to follow with respect to the permit's pollution prevention requirements.
4. When and how to conduct inspections, record applicable findings, and take corrective actions.

The stormwater team have access to the stormwater permit and a current copy of the SWPPP along with any other relevant document or information related to stormwater management on site.

VI. Reporting Requirements

All inspection of erosion and sediment controls shall be reported using the forms included in Appendix D and maintained on-site. Reports shall be submitted, upon request, to the Mississippi Office of Pollution Control at the following address:

Chief, Environmental Permits Division
Office of Pollution Control
Department of Environmental Quality
P.O. Box 10385
Jackson, MS 39289-0385Air

VII. Post Construction Controls

Controls after the project has been completed will consist of permanent grass growth being established.

VIII. Housekeeping Practices

The owner/operator shall design, install, implement and maintain practices appropriately to prevent pollutants from entering storm water from construction sites because of poor housekeeping. These practices are listed in the SWPPP and located on the site map.

1. Equipment Maintenance and Repair - There shall be no major maintenance and/or repairs performed within the project area. Minor maintenance and repairs shall be permitted only after appropriate erosion control measures are in place.
2. Waste Receptacles and Waste Collection - Each construction crew will be responsible for providing waste receptacles for their use. The receptacles shall be emptied off site at an appropriate interval.
3. Storage Areas - Chemicals, solvents, paints, fuels and other potential pollutants shall be kept under cover in a location that is not affected by storm water runoff. Equipment and containers are not to be washed in an area that will allow runoff to directly enter a stream or storm drain inlet.
4. Sanitary Facilities - Each construction crew shall be responsible for providing and maintain adequate sanitary facilities for their own use. Please note that the sanitary facilities are not permitted to discharge into State Waters. Portable facilities in which the sanitary waste is collected and disposed at an appropriate treatment facility may be utilized, but should not be located near storm water inlets.

IX. Non-Storm Water Discharge Management

Below are a list of allowable non-storm water discharges for this project:

1. Water used to control dust.
2. Potable water sources including uncontaminated water line flushing.
3. Pavement wash waters where spills or leaks of toxic or hazardous materials have not occurred (unless all spilled material has been removed) and where detergents are not used.
4. Uncontaminated ground water or spring water.
5. Uncontaminated excavation dewatering.
6. Landscape irrigation
7. Water used to wash vehicles, wheel wash water and other wash waters where detergents are not used.

Non-storm water discharges should be eliminated or reduced to the extent feasible. All wash waters from construction activities shall be directed to a sedimentation basin, prior to leaving the site.

X. Final Stabilization

All disturbed areas shall receive some type of erosion control treatment within fourteen (14) days of no disturbance. Permanent grassing is preferred, but erosion control blanket or sodding is also acceptable. Grassing shall be phased on such a manner as to adhere to the fourteen (14) day requirement.

XI. Appendix

Appendix A - Site Location Map

Appendix B - Construction Sequence

Appendix C - Maintenance Plan

Appendix D - Inspection Report and Certification Form

Appendix E - Erosion Control Plans and Details


APPENDIX A
SITE LOCATION MAP



Legend: — Campus Boundary — Project Site Boundary


Site Location Map

ANDURIL INDUSTRIES MCHENRY CAMPUS

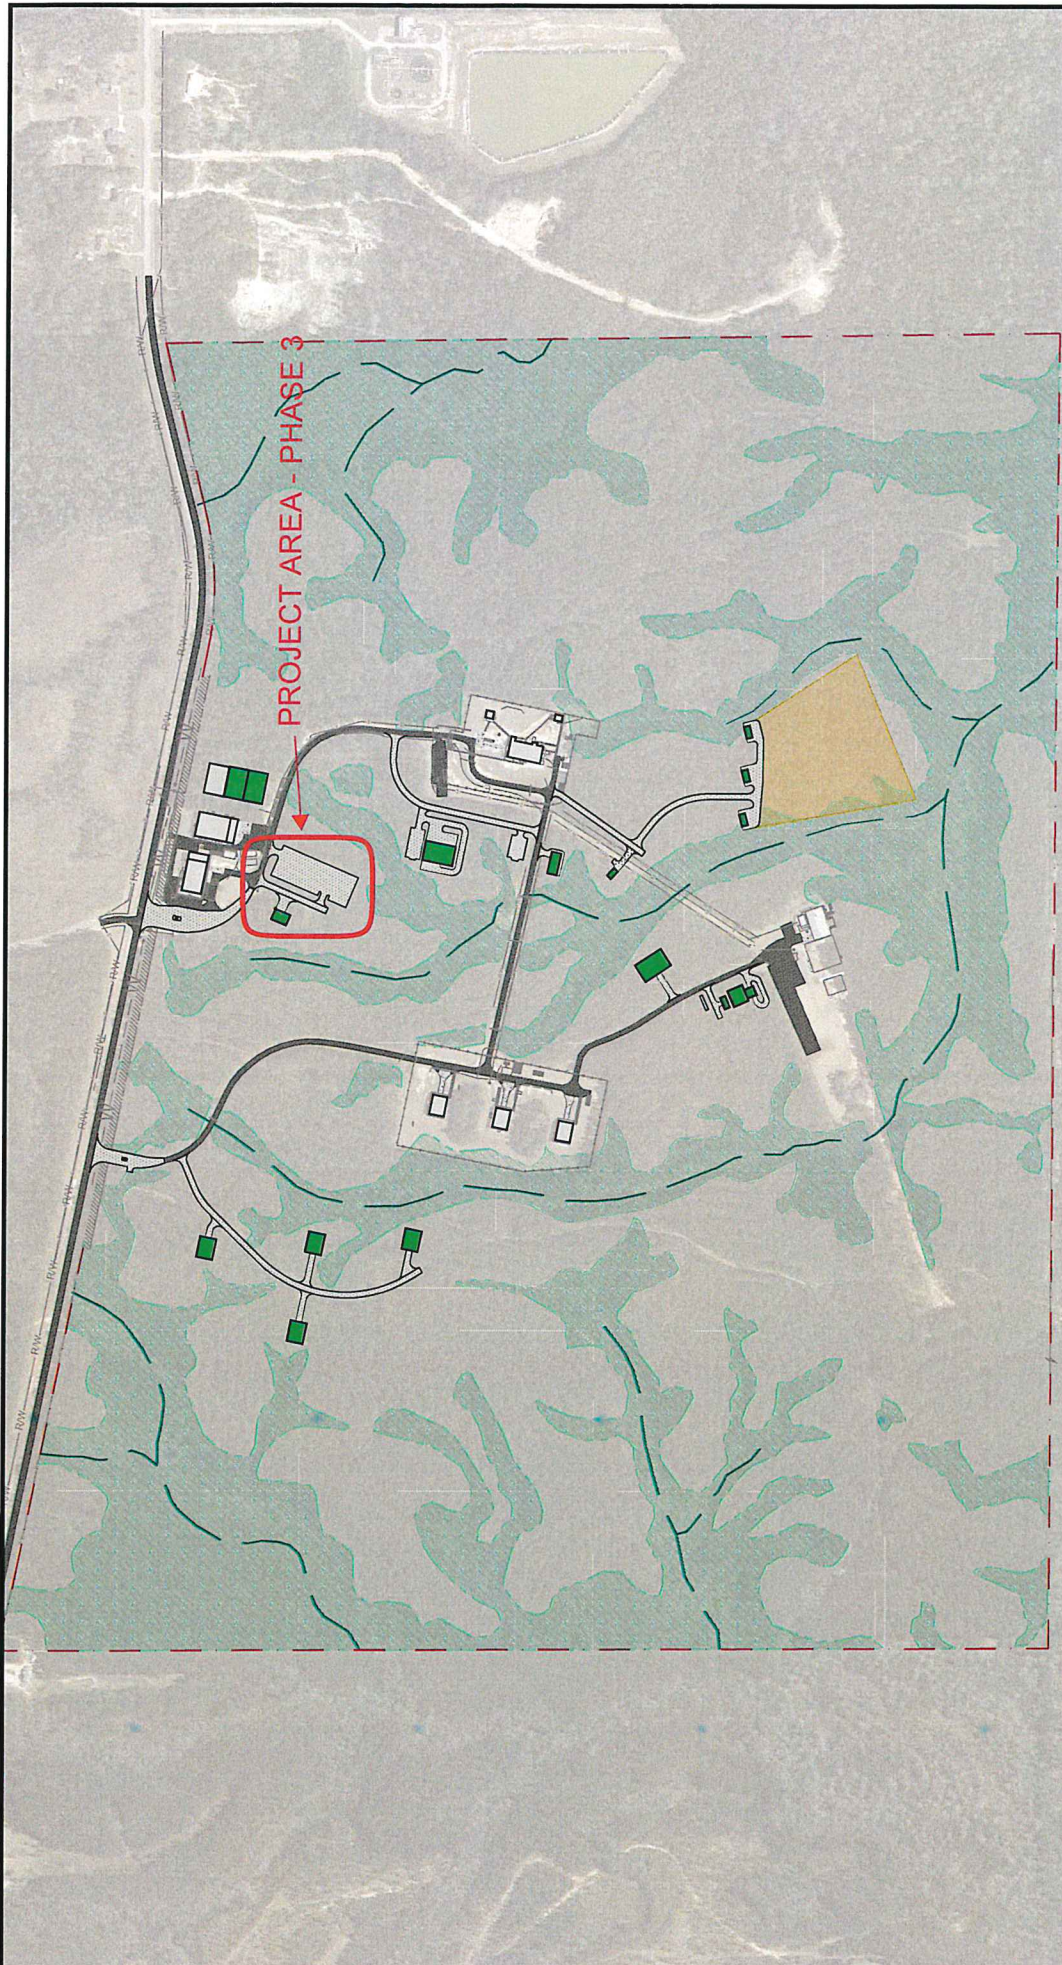

- PHASING LEGEND:**
- EXISTING
 - PHASE 3
 - PHASE 4
 - PHASE 5
 - PHASE 6

- LEGEND:**
- WETLAND DELINEATION
 - APPROX. STREAMS
 - PROPOSED PAVEMENT
 - PROPOSED PROPERTY
 - BOUNDARY EXTENSION

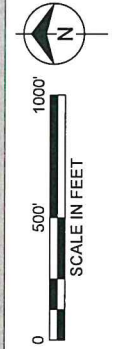


ANDURIL RMS
McHENRY, MS
CONCEPTUAL SITE LAYOUT
REVISION F
02/25/2026

APPENDIX B
IMPLEMENTATION SEQUENCE

Implementation Sequence

1. Obtain plan approval and other applicable permits.
2. Hold preconstruction conference at least one week prior to starting construction. Weekly review of erosion, sediment, and storm water control plan will be conducted.
3. Flag the work limits.
4. Install erosion control measures as the first construction activity. Erosion control measures are to be installed at all locations sensitive to the discharge of erosion and sediment into State Waters.
5. Complete site work and grading. Disturbed areas to receive temporary grassing prior to removal of silt fence.
6. Complete final grading of grounds and permanently vegetate, landscape, and mulch.
7. All erosion and sediment control practices will be inspected weekly and after 0.5 inch rainfall events or greater. Necessary repairs will be made immediately.
8. After site is stabilized, remove all temporary erosion control measures and install permanent vegetation on any disturbed areas.
9. Estimated time before final stabilization from commencement of project ~ 18 months.

APPENDIX C
MAINTENANCE PLAN

Maintenance Plan

Short Term

1. All erosion and sediment control practices will be checked for stability and operation following every runoff-producing rainfall but in no case less than once every week. Any needed repairs will be made immediately to maintain all practices as designed.
2. Sediment will be removed from behind the sediment fence, wattles, and check dams when necessary.
3. All seeded areas will be fertilized, reseeded as necessary, and mulched according to specifications in the vegetative plan to maintain a vigorous, dense vegetative cover.
4. As needed, new or additional workers will be informed of the plan details in the operation and maintenance of plan features.

Long Term

1. All vegetated areas will be maintained in adequate condition to provide proper ground cover, thereby reducing erosion potential.
2. Areas where vegetation is lost will be fertilized, seeded, and maintained as necessary to restore ground cover.

APPENDIX D
INSPECTION REPORT

Keep a Copy Available at the Permitted Facility or Locally Available
 Submit the Inspection Reports Only if Requested by the Mississippi Department of Environmental Quality (MDEQ)

LARGE CONSTRUCTION GENERAL PERMIT
 SITE INSPECTION AND CERTIFICATION FORM
 COVERAGE NUMBER (MSR10 _____)



INSTRUCTIONS

Results of construction storm water inspections required by ACT6 of this permit shall be recorded on this report form and kept with the Storm Water Pollution Prevention Plan (SWPPP) in accordance with the inspection documentation provisions of ACT9 of the this permit. Inspections shall be performed at least weekly for a minimum of four inspections per month. The coverage number must be listed at the top of all Inspection and Certification Forms.

COVERAGE RECIPIENT INFORMATION

OWNER/PRIME CONTRATOR NAME: _____
 PROJECT NAME: _____
 PROJECT STREET ADDRESS: _____
 PROJECT CITY: _____ PROJECT COUNTY: _____
 OWNER/PRIME CONTRACTOR MAILING ADDRESS: _____
 MAILING CITY: _____ STATE: _____ ZIP: _____
 CONTACT PERSON: _____ CONTACT PHONE NUMBER: (____) _____
 EMAIL ADDRESS: _____

INSPECTION DOCUMENTATION

DATE (mo/day/yr)	TIME (hr:min AM/PM)	ANY DEFICIENCIES? (CHECK IF YES)	INSPECTOR(S)
		<input type="checkbox"/>	
		<input type="checkbox"/>	
		<input type="checkbox"/>	
		<input type="checkbox"/>	
		<input type="checkbox"/>	
		<input type="checkbox"/>	

Deficiencies Noted During any Inspection (give date(s); attach additional sheets if necessary): _____

Corrective Action Taken or Planned (give date(s); attach additional sheets if necessary): _____

Based upon this inspection, which I or personnel under my direct supervision conducted, I certify that all erosion and sediment controls have been implemented and maintained, except for those deficiencies noted above, in accordance with the Storm Water Pollution Prevention Plan (SWPPP) and sound engineering practices as required by the above referenced permit. I further certify that the LCN01 and SWPPP information is up to date.

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fines and imprisonment for knowing violations.


 Authorized Signature

 Printed Name

 Date
 Owner

 Title

APPENDIX E
EROSION CONTROL DETAILS

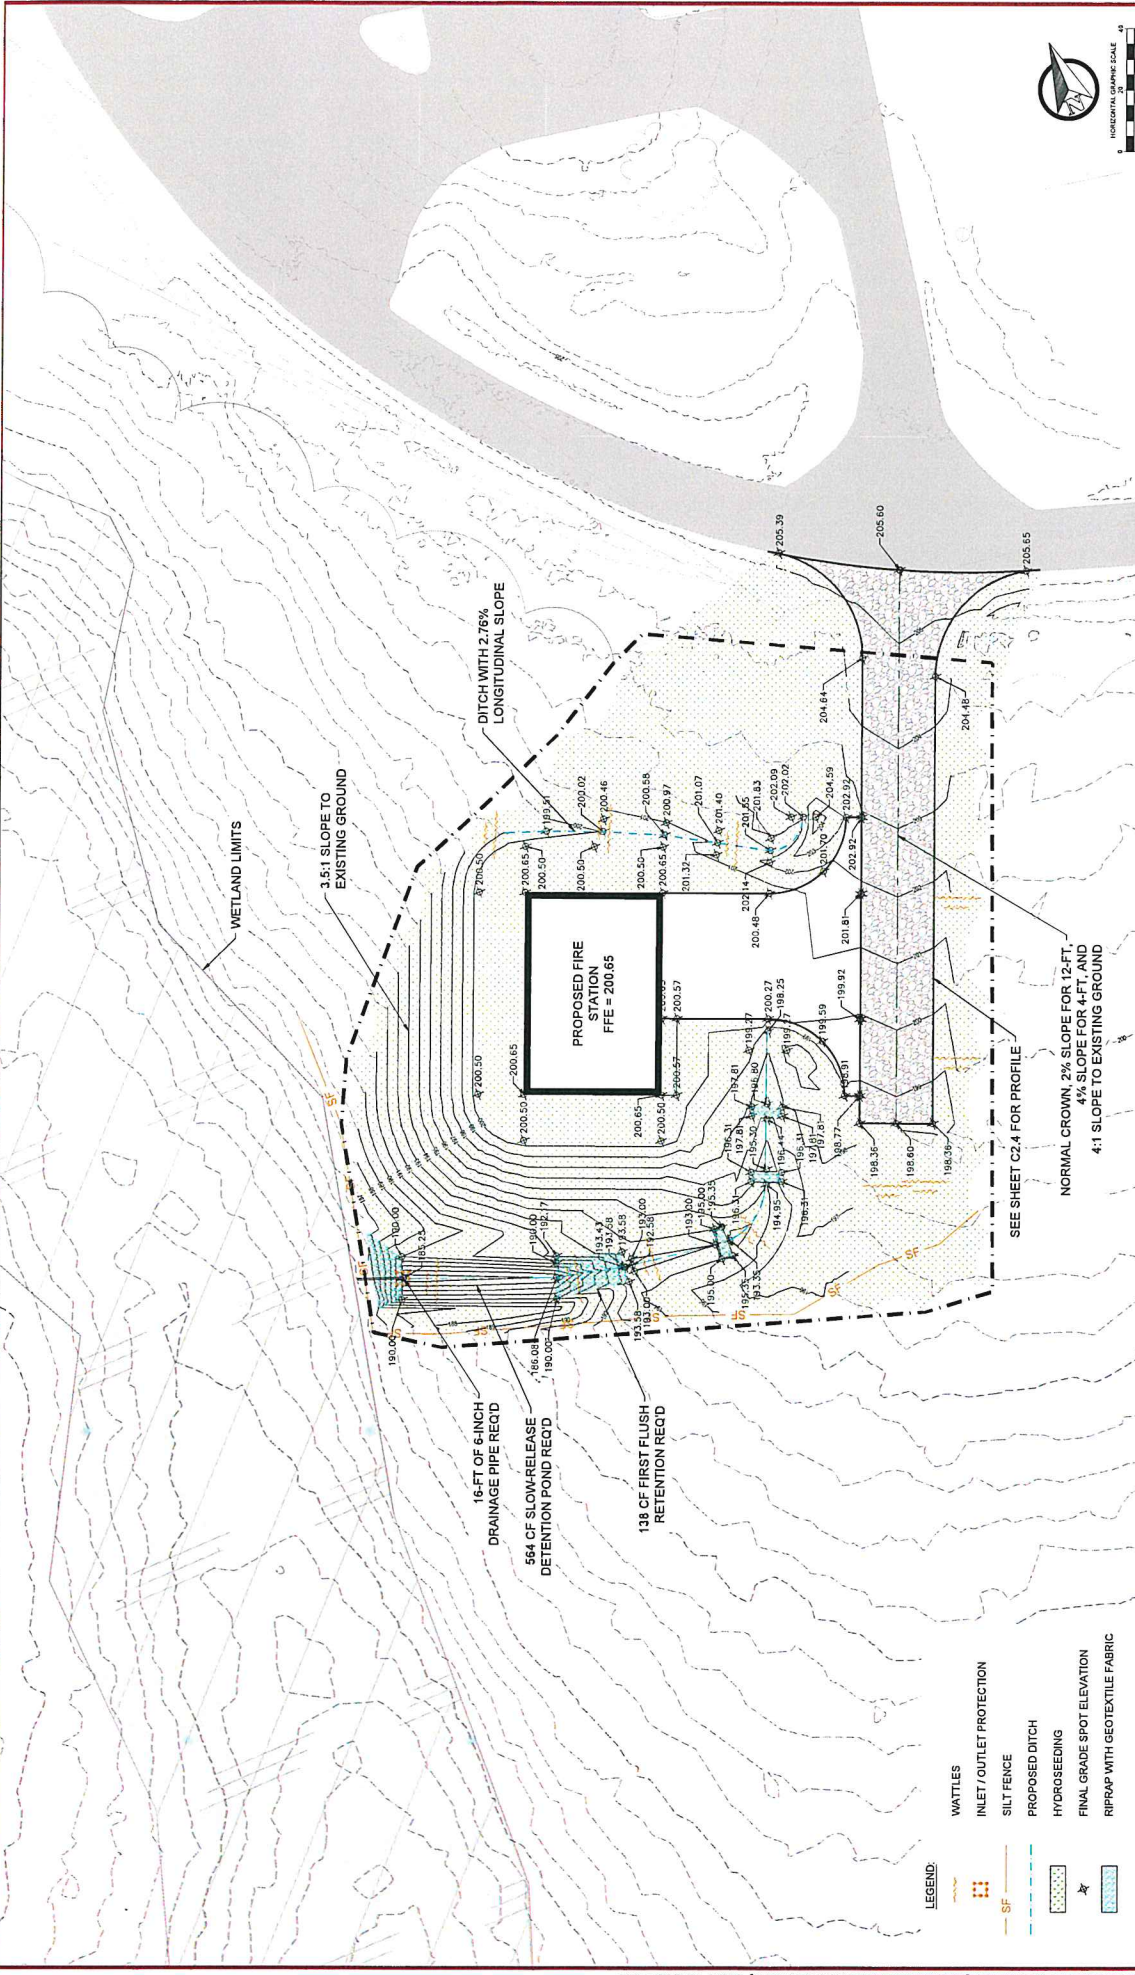

- LEGEND:**
- WATTLES
 - INLET / OUTLET PROTECTION
 - SILT FENCE
 - PROPOSED DITCH
 - HYDROSEEDING
 - FINAL GRADE SPOT ELEVATION
 - RIPPRAP WITH GEOTEXTILE FABRIC

REVISIONS	
NO.	DESCRIPTION

FILE NO.:	1931-25 02
DATE:	02/10/2026
SCALE:	1" = 20'
DRAWN BY:	BBB
CHECKED BY:	WRT
QA/QC:	RLN

ANDURIL FIRE STATION
ANDURIL INDUSTRIES
 McHENRY, MISSISSIPPI

TEI
TICE ENGINEERING, INC.
 ENGINEERS & SURVEYORS
Trusted Engineers. Enhanced Surveys. Innovative Results.

510 S. VARDAMAN ST.
 WIGGINS, MS 39577
 PHONE: 601.928.4121
 EMAIL: info@ticeeng.com

WORKING NUMBER: C2.3

SHEET NUMBER: 7