

STORM WATER POLLUTION PREVENTION PLAN

LIBERTY RIDGE RESIDENTIAL SUBDIVISION

HARRISON COUNTY, MISSISSIPPI

MAY 2026

PREPARED BY:



EXECUTIVE SUMMARY

Phelan Engineering, LLC was engaged by LAND N LOTS to provide engineering design services for Liberty Ridge Subdivision. The development is located across the street from the existing home at 20866 West Wortham Road; coordinates are 30.576, -89.203. This site is generally undeveloped with logging roads present.

The project looks to construct all water and sewer utilities and provide grading for a 23-lot single family residential development with homes facing West Wortham Road; no new roads will be constructed. The project will be constructed in a single phase with approximately 11.6 of the 47.8 total acres to be disturbed at varying times throughout the development. As required by the Mississippi Department of Environmental Quality (MDEQ) this Stormwater Pollution Prevention Plan (SWPPP) is being prepared for this specific project for coverage under the Large Construction General Permit.

This SWPPP seeks to outlay the Erosion and Sediment Controls that will utilized, soil stabilization practices, vegetative practices, structural controls, post construction controls remaining, housekeeping, etc. as well as discuss the receiving stream most affected, implementation of this plan, maintenance of Best Management Practices (BMPs), and site inspections.

Finally, attachments to this report will further illustrate the means of providing sediment and erosion control on site.

<i>Describe the nature of the construction activity:</i>	Construction will consist of infrastructure (water, sewer, drainage, etc.) and grading necessary for a 23-lot single family residential subdivision; no roads are proposed.
<i>Describe the intended sequence of major soil disturbing activities:</i>	<ol style="list-style-type: none"> 1) Installation of construction exit. 2) Install initial erosion and sediment control BMPs (these will be maintained and updated as construction progresses). 3) Begin site clearing and grubbing. 4) Perform Earthwork operations to get site to rough grade. 5) Install water, sewer, and drainage facilities 6) Provide permanent stabilization 7) Remove all temporary BMPs <p>Contractor will ensure that proper BMPs, commiserate with those shown on this SWPPP and its attachments, will be utilized between phases to protect completed phases from sedimentation on phases under construction.</p>
<i>Total area of the site:</i>	47.8 Acres
<i>Total area of the site to be disturbed:</i>	11.6 Acres
<i>Existing data describing the soil or quality of any stormwater discharge from the site:</i>	<p>Per Web Soil Survey, site is predominately sandy loams (Poarch fine (70%) and Ruston (30%)).</p> <p>Stormwater discharge from this site appears to be of normal quality as the site remains undeveloped.</p>
<i>Estimate the drainage area size for each discharge point:</i>	Approximately 36 acres goes to a wetland to the west, and the remaining 12 acres goes to the roadside ditch along West Wortham to the east. All discharge points enter tributaries for the Little Biloxi River (approximately 2 mile straight line to the south).
<i>Latitude and longitude of each discharge point and identify the receiving water or MS4 for each discharge point:</i>	<p>West: 30.5748, -89.2047 East: 30.5783, -89.2023</p> <p>The property itself is located in the Harrison Co. MS4 area.</p>
<i>Total Maximum Daily Load (TMDL) for receiving streams</i>	<p>Site will eventually discharge into the "MS116M3" section of Little Biloxi River. This section has TMDLs established for "Pathogens".</p> <p>The project will be designed and implemented to eliminate concerns related to these pollutants. The project site will utilize waste receptacles, off-site equipment maintenance, proper material/chemical storage, etc. to assist with limiting Phenol and toxics pollution. Organics/Low DO mitigation will include silt fence, vegetation removal, and other BMPs to limit organic matter decomposition in streams as well as port-o-lets to eliminate human waste from contributing to these TMDLs.</p>

Give a detailed description of all controls, Best Management Practices (BMPs) and measures that will be implemented at the construction site for each activity identified in the intended sequence of major soil disturbing activities section.

Construction Exit – Stone pad to remove sediment trapped on vehicle tires.

Check Dam – Straw wattle, hay bale, stone, or similar barrier along a flow line/discharge point to reduce erosion and capture dislodged sediment.

Diversion Ditch – a designed watercourse set either to route undisturbed water around disturbed land or to route disturbed lands to proper erosion control BMPs.

Grass Swale – constructed channel (permanent or temporary) to both handle runoff and use vegetations natural ability to clean stormwater.

Inlet Protection – sediment barrier placed around an inlet structure or open pipe end to prevent dislodged sediment from entering underground drainage conveyance.

Rock Filter Dam – stone embankment used to capture sediment on the upstream side; includes a settling pooling area.

Sediment Barrier (silt fence) – temporary barrier to utilizing a geotextile fabric to prevent sediment from running off downstream.

Describe all temporary and permanent stabilization practices. Stabilization practices include temporary seeding, mulching, permanent seeding, geotextiles, sod stabilization, vegetative buffer strips, protection of trees, vegetative preservations, etc.

Dust Control – use of water to keep wind-blown sediment from dislodging.

Erosion Control Blanket – a temporary protective made of biodegradable materials used to cover seeded bare earth and limit loss of seed during germination.

Seeding – both temporary and permanent, to include establishment of vegetation on all disturbed areas with no ongoing Work. Seeding will be per the attached chart.

Preservation of vegetation – avoidance of an area during land disturbing.

Buffer Strips – a vegetated strip (preferably natural/undisturbed) between disturbed areas and sensitive areas (i.e. existing wetlands). *Note, where a 50' buffer between wetlands and construction is not feasible, additional erosion control measures shall be added to provide equivalent protection.*

Protection of Trees – maintaining trees that do no conflict with proposed construction to maintain tree roots' ability to “hold” sediment particles in place.

Note, Vegetative stabilization measures must be initiated whenever any clearing, grading, grubbing, excavating or other land disturbing activities have temporarily or permanently ceased on any portion of the site and will not resume for a period of fourteen (14) calendar days or more. The appropriate temporary or permanent vegetative practices shall be initiated immediately (no later than the next work-day.)

Describe all sediment basins to be implemented for areas that will disturb 10 or more acres at one time. The sediment basins (or an equivalent alternative) should be able to provide 3,600 cubic feet of storage for each acre drained.

No portion of the site will drain 10 acres or more of disturbed area at any time.

Describe all permanent stormwater management controls such as, but not limited to, detention or retention systems or vegetated swales that will be installed during the construction process.

Two (2) detention ponds will serve the site in perpetuity. The ponds are located in a naturally lower area to avoid the need for excessive dirtwork and/or piping to route flow to the pond(s). Further, the ponds on this site will provide better water quality capability. Both ponds will have a single pipe outfall.

Grass swales will be provided where concentrated drainage travels overland. These swales will route runoff to either the ponds or the existing roadside ditch along West Wortham.

Describe in detail controls for the following potential pollutants:

<i>Waste disposal, this may include construction debris, chemicals, litter, and sanitary wastes:</i>	Contractor will be required to provide waste receptacles and portable toilets around the construction site.
<i>Offsite vehicle tracking from construction entrances/exits:</i>	A 50'x20' stone construction exit will be constructed at the single point of entrance. This stone exit will be monitored and regraded/cleaned as necessary. This stone entrance will be moved as phases progress.
<i>The proper application rates of all fertilizers, herbicides and pesticides used at the construction site:</i>	Fertilizers, herbicides, and pesticides, will be stored in designated protected areas. Application rates will be no higher than manufacturer's recommendations. Fertilizers will be tilled in to limit fertilizer runoff.
<i>The storage, application, generation and migration of all toxic substances:</i>	Toxic substances will be stored in protected areas. Fuels will be stored on removable trailers. Equipment maintenance will occur off-site. Spill prevention practices and response procedures will be communicated to workers.

Provide a detailed description of the maintenance plan for all structural and non-structural controls to assure that they remain in good and effective operating condition.

All structural and non-structural measures will be maintained by the contractor in good working repair. Any deficiencies noted will be repaired within 24 hours of discovery; in any instance where repair may take > 24 hours, contractor will contact MDEQ to discuss. Maintenance will include looking for and repairing tears or breaches in structural controls, unvegetated areas, etc.

Sediment buildup on structural controls will be closely monitored on a (minimum) weekly basis. Once the sediment is at 50% of the capacity of the control, sediment will be removed.

Inspections: Describe the inspection and inspection documentation procedures.

Inspection of all receiving streams, outfalls, erosion and sediment controls and other SWPPP requirements shall be performed during permit coverage using a copy of the form provided in the Large Construction Forms Package (or equivalent form), and inspections shall be performed by qualified personnel (see Definitions):

- (1) At least weekly for a minimum of four inspections per month; and
- (2) after any rainfall event that produces a discharge
- (3) As often as is necessary to ensure that appropriate erosion and sediment controls have been properly constructed and maintained and to determine if additional or alternative control measures are required.

Before conducting the site inspection, the inspector should review Chapter 4, Inspector's Checklist and Troubleshooting Chart found in MDEQ's Field Manual for Erosion and Sediment Control on Construction Sites in Mississippi.

A daily "walk through" inspection of the construction site will help ensure controls are in place and will function properly.

Planned Transfer of Ownership

The Owner plans to construct infrastructure as well as mass grading (but not final grading) of lots. A 3rd Party will then complete the actual house construction after the Owner's work is complete. It is the intent of the Owner to Transfer the permit name to the 3rd party builder as part of the Lot Sale by using MDEQ's Transfer of Permit form. The Owner full understands that, until this transfer is complete and accepted, the Owner retains responsibility for ALL permit compliance.


Staff Training

As required by Act 5 of the Large Construction General Permit, a "stormwater team" must carry out compliance activities related to this permit. Staff shall be trained in installation, maintenance, and/or repair of stormwater controls, storage of chemicals, stormwater inspections, and appropriate corrective action.

Prior to construction beginning, representatives of all contractors working on this project are to have a preconstruction conference with the engineer to review requirements of this SWPPP and the plans as well as general permit requirements. Contractors shall also certify to the Owner that all staff completing "land disturbance work" has received additional training with appropriate "refresher training" annually. Engineer will make periodic site visits and assist if any noted training deficiencies are discovered.

"I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

OWNER:



Trey Dufriend


Date: 5-21-26

Land-N-Lots

Attachments:

- 1) Vicinity Map with USGS Topographical Map
- 2) Seeding Chart for the State of Mississippi
- 3) Large Construction Notice of Intent
- 4) Site Inspection and Certification Form
- 5) Request for Termination of Coverage
- 6) Associated Plan Sheets

Vicinity Map / Topo Map

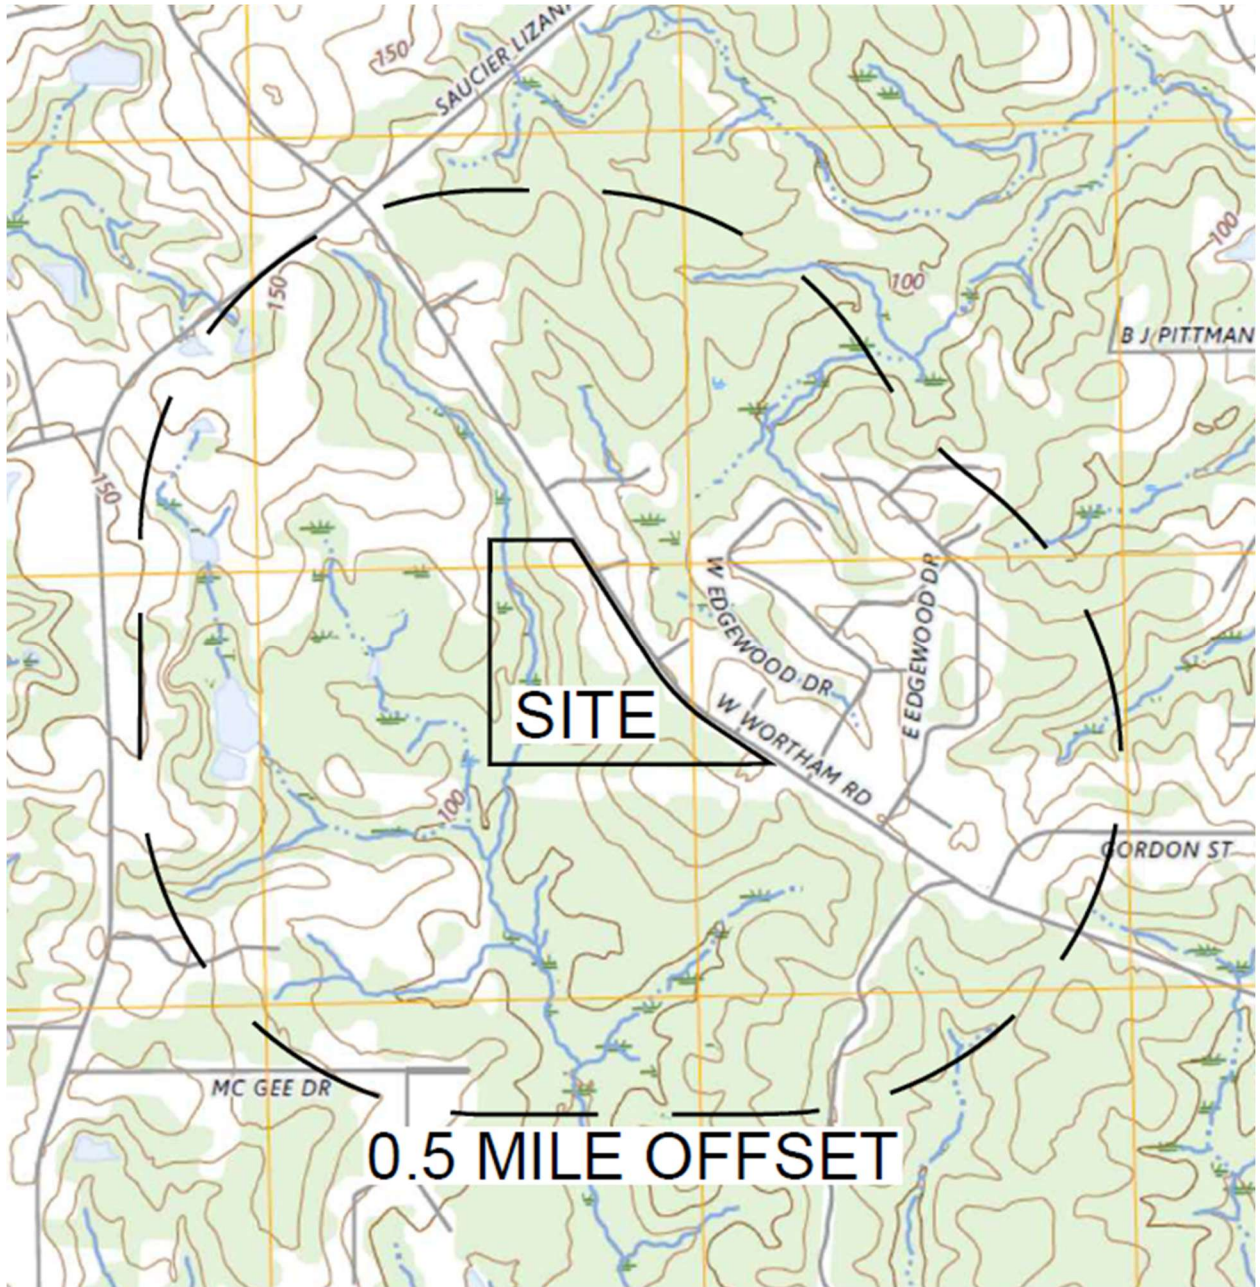

SEEDING CHART FOR THE STATE OF MISSISSIPPI

SPECIES	SEEDING RATE/ACRE	PLANTING TIME	DESIRED pH RANGE	FERTILIZATION RATE/ACRE	METHOD OF ESTABLISHMENT	ZONE OF ADAPTABILITY ¹
Common Bermuda	15 lbs. alone 10 lbs. mixture	3/1 - 7/15 9/1 - 11/30	6.0 - 7.0	600 lbs. 13-13-13	seed or sod	All
Bahia	40 lbs. alone 30 lbs. mixture	3/1 - 7/15 9/1 - 11/30	6.0 - 7.0	600 lbs. 13-13-13	seed	Central South
Fescue	40 lbs. alone 30 lbs. mixture	9/1 - 11/30	6.0 - 7.0	600 lbs. 13-13-13	seed	North Central
Saint Augustine	--	3/1 - 7/15	6.0 - 7.0	600 lbs. 13-13-13	sod only	Central South
Centipede	4 lbs. alone 2.5 lbs. mix	3/1 - 7/15	6.0 - 7.0	600 lbs. 13-13-13	seed or sod	All
Carpet Grass	15 lbs. alone 10 lbs. mixture	3/1 - 7/15	6.0 - 7.0	600 lbs. 13-13-13	seed or sod	All
Oysia Grass	--	3/1 - 7/15	6.0 - 7.0	600 lbs. 13-13-13	sod only	All
Creeping Red Fescue	30 lbs. alone 22.5 lbs. mix	9/1 - 11/30	6.0 - 7.0	600 lbs. 13-13-13	seed	All
Weeping Lovegrass	10 lbs. alone 5 lbs. mix	3/1 - 7/15	6.0 - 7.0	600 lbs. 13-13-13	seed	All
Sericea Lespedeza	40 lbs.	3/1 - 7/15 9/1 - 11/30	6.0 - 7.0	400 lbs. 6-24-24	seed	All
*Wheat	90 lbs. alone	9/1 - 11/30	6.0 - 7.0	600 lbs. 13-13-13	seed	All
*Ryegrass	30 lbs.	9/1 - 11/30	6.0 - 7.0	600 lbs. 13-13-13	seed	All
*White Clover	5 lbs.	9/1 - 11/30	6.0 - 7.0	400 lbs. 6-24-24	seed	All
*Crimson Clover	25 lbs. alone 15 lbs. mix	9/1 - 11/30	6.0 - 7.0	400 lbs. 6-24-24	seed	All
*Hairy Vetch	30 lbs.	9/1 - 11/30	6.0 - 7.0	400 lbs. 6-24-24	seed	All
*Browntop Millet	40 lbs. alone 15 lbs. mix	4/1 - 8/30	6.0 - 7.0	600 lbs. 13-13-13	seed	All

* Annuals. For permanent seeding, annuals can only be used in a mixture with perennials.

North- north of Hwy. 82

Central- south of Hwy. 82 & north of Hwy. 84

South- South of Hwy. 84

MSR10_9896

(NUMBER TO BE ASSIGNED BY STATE)

APPLICANT IS THE: OWNER PRIME CONTRACTOR

OWNER CONTACT INFORMATION

OWNER CONTACT PERSON: _____
 OWNER COMPANY LEGAL NAME: _____
 OWNER STREET OR P.O. BOX: _____
 OWNER CITY: _____ STATE: _____ ZIP: _____
 OWNER PHONE #: (____) _____ OWNER EMAIL: _____

PREPARER CONTACT INFORMATION

IF NOI WAS PREPARED BY SOMEONE OTHER THAN THE APPLICANT

CONTACT PERSON: _____
 COMPANY LEGAL NAME: _____
 STREET OR P.O. BOX: _____
 CITY: _____ STATE: _____ ZIP: _____
 PHONE # () _____ EMAIL: _____

PRIME CONTRACTOR CONTACT INFORMATION

PRIME CONTRACTOR CONTACT PERSON: _____
 PRIME CONTRACTOR COMPANY LEGAL NAME: _____
 PRIME CONTRACTOR STREET OR P.O. BOX: _____
 PRIME CONTRACTOR CITY: _____ STATE: _____ ZIP: _____
 PRIME CONTRACTOR PHONE #: (____) _____ PRIME CONTRACTOR EMAIL: _____

FACILITY SITE INFORMATION

FACILITY SITE NAME: _____
 FACILITY SITE ADDRESS (If the physical address is not available, please indicate the nearest named road. For linear projects indicate the beginning of the project and identify all counties the project traverses.)
 STREET: _____
 CITY: _____ STATE: _____ COUNTY: _____ ZIP: _____
 FACILITY SITE TRIBAL LAND ID (N/A If not applicable): _____
 LATITUDE: ____ degrees ____ minutes ____ seconds LONGITUDE: ____ degrees ____ minutes ____ seconds
 LAT & LONG DATA SOURCE (GPS (Please GPS Project Entrance/Start Point) or Map Interpolation): _____
 TOTAL ACREAGE THAT WILL BE DISTURBED ¹: _____

IS THIS PART OF A LARGER COMMON PLAN OF DEVELOPMENT? YES NO

IF YES, NAME OF LARGER COMMON PLAN OF DEVELOPMENT: _____
 AND PERMIT COVERAGE NUMBER: MSR10_ _ _ _ _

ESTIMATED CONSTRUCTION PROJECT START DATE: _____
 YYYY-MM-DD

ESTIMATED CONSTRUCTION PROJECT END DATE: _____
 YYYY-MM-DD

DESCRIPTION OF CONSTRUCTION ACTIVITY: _____

PROPOSED DESCRIPTION OF PROPERTY USE AFTER CONSTRUCTION HAS BEEN COMPLETED:

SIC Code: _ _ _ _ _ NAICS Code _ _ _ _ _

NEAREST NAMED RECEIVING STREAM: _____

IS RECEIVING STREAM ON MISSISSIPPI'S 303(d) LIST OF IMPAIRED WATER BODIES? (The 303(d) list of impaired waters and TMDL stream segments may be found on MDEQ's web site: http://www.deq.state.ms.us/MDEQ.nsf/page/TWB_Total_Maximum_Daily_Load_Section) YES NO

HAS A TMDL BEEN ESTABLISHED FOR THE RECEIVING STREAM SEGMENT? YES NO

FOR WHICH POLLUTANT: **PATHOGENS**

ARE THERE RECREATIONAL STREAMS, PRIVATE/PUBLIC PONDS OR LAKES WITHIN 1/2 MILE DOWNSTREAM OF PROJECT BOUNDARY THAT MAY BE IMPACTED BY THE CONSTRUCTION ACTIVITY? YES NO

EXISTING DATA DESCRIBING THE SOIL (for linear projects please describe in SWPPP):

WILL FLOCCULANTS BE USED TO TREAT TURBIDITY IN STORM WATER? YES NO

IF YES, INDICATE THE TYPE OF FLOCCULANT. ANIONIC POLYACRYLIMIDE (PAM)
 OTHER _____

IF YES, DOES THE SWPPP DESCRIBE THE METHOD OF INTRODUCTION, THE LOCATION OF INTRODUCTION AND THE LOCATION OF WHERE FLOCCULATED MATERIAL WILL SETTLE?

IS A SDS SHEET INCLUDED FOR THE FLOCCULATE? YES NO

WILL THERE BE A 50 FT BUFFER BETWEEN THE PROJECT DISTURBANCE AND THE WATERS OF THE STATE? YES NO

IF NOT, PROVIDE EQUIVALENT CONTROL MEASURES IN THE SWPPP.

¹Acreage for subdivision development includes areas disturbed by construction of roads, utilities and drainage. Additionally, a housesite of at least 10,000 ft² per lot (entire lot, if smaller) shall be included in calculating acreage disturbed.

DOCUMENTATION OF COMPLIANCE WITH OTHER REGULATIONS/REQUIREMENTS
 COVERAGE UNDER THIS PERMIT WILL NOT BE GRANTED UNTIL ALL OTHER REQUIRED
 MDEQ PERMITS AND APPROVALS ARE SATISFACTORILY ADDRESSED

IS LCNOI FOR A FACILITY THAT WILL REQUIRE OTHER PERMITS? YES NO

IF YES, CHECK ALL THAT APPLY: AIR HAZARDOUS WASTE PRETREATMENT
 WATER STATE OPERATING INDIVIDUAL NPDES OTHER: _____

IS THE PROJECT REROUTING, FILLING OR CROSSING A WATER CONVEYANCE OF ANY KIND? (If yes, contact the U.S. Army Corps of Engineers' Regulatory Branch for permitting requirements.) YES NO

IF THE PROJECT REQUIRES A CORPS OF ENGINEER SECTION 404 PERMIT, PROVIDE APPROPRIATE DOCUMENTATION THAT:

- The project has been approved by individual permit, or
- The work will be covered by a nationwide permit and NO NOTIFICATION to the Corps is required, or
- The work will be covered by a nationwide or general permit and NOTIFICATION to the Corps is required

IS THE PROJECT REROUTING, FILLING OR CROSSING A STATE WATER CONVEYANCE OF ANY KIND? (If yes, please provide an antidegradation report.) YES NO

IS A LAKE REQUIRING THE CONSTRUCTION OF A DAM BEING PROPOSED? (If yes, provide appropriate approval documentation from MDEQ Office of Land and Water, Dam Safety.) YES NO

IF THE PROJECT IS A SUBDIVISION OR A COMMERCIAL DEVELOPMENT, HOW WILL SANITARY SEWAGE BE DISPOSED? Check one of the following and attach the pertinent documents.

- Existing Municipal or Commercial System. Please attach plans and specifications for the collection system and the associated "Information Regarding Proposed Wastewater Projects" form or approval from County Utility Authority in Hancock, Harrison, Jackson, Pearl River and Stone Counties. If the plans and specifications can not be provided at the time of LCNOI submittal, MDEQ will accept written acknowledgement from official(s) responsible for wastewater collection and treatment that the flows generated from the proposed project can and will be transported and treated properly. The letter must include the estimated flow.
- Collection and Treatment System will be Constructed. Please attach a copy of the cover of the NPDES discharge permit from MDEQ or indicate the date the application was submitted to MDEQ (Date: _____.)
- Individual Onsite Wastewater Disposal Systems for Subdivisions Less than 35 Lots. Please attach a copy of the Letter of General Acceptance from the Mississippi State Department of Health or certification from a registered professional engineer that the platted lots should support individual onsite wastewater disposal systems.
- Individual Onsite Wastewater Disposal Systems for Subdivisions Greater than 35 Lots. A determination of the feasibility of installing a central sewage collection and treatment system must be made by MDEQ. A copy of the response from MDEQ concerning the feasibility study must be attached. If a central collection and wastewater system is not feasible, then please attach a copy of the Letter of General Acceptance from the State Department of Health or certification from a registered professional engineer that the platted lots should support individual onsite wastewater disposal systems.

INDICATE ANY LOCAL STORM WATER ORDINANCE (I.E. MS4) WITH WHICH THE PROJECT MUST COMPLY:

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.


Signature of Applicant¹ (owner or prime contractor)

5-21-26
Date Signed

Trey Dufriend Jr
Printed Name¹

Owner
Title

¹This application shall be signed as follows:

- For a corporation, by a responsible corporate officer.
- For a partnership, by a general partner.
- For a sole proprietorship, by the proprietor.

For a municipal, state or other public facility, by principal executive officer, mayor, or ranking elected official

Please submit the LCNOI form to:

Chief, Environmental Permits Division
MS Department of Environmental Quality, Office of Pollution Control
P.O. Box 2261
Jackson, Mississippi 39225

Electronically:

<https://www.mdeq.ms.gov/construction-stormwater/>

Revised 3/23/22

**Keep a Copy Available at the Permitted Facility or Locally Available
Submit the Inspection Reports Only if Requested by the Mississippi Department of Environmental Quality (MDEQ)**

**LARGE CONSTRUCTION GENERAL PERMIT
SITE INSPECTION AND CERTIFICATION FORM
COVERAGE NUMBER (MSR10 _ _ _ _)**



INSTRUCTIONS

Results of construction storm water inspections required by ACT6 of this permit shall be recorded on this report form and kept with the Storm Water Pollution Prevention Plan (SWPPP) in accordance with the inspection documentation provisions of ACT9 of the this permit. Inspections shall be performed at least weekly for a minimum of four inspections per month. The coverage number must be listed at the top of all Inspection and Certification Forms.

COVERAGE RECIPIENT INFORMATION

OWNER/PRIME CONTRATOR NAME: _____

PROJECT NAME: _____

PROJECT STREET ADDRESS: _____

PROJECT CITY: _____ **PROJECT COUNTY:** _____

OWNER/PRIME CONTRACTOR MAILING ADDRESS: _____

MAILING CITY: _____ **STATE:** _____ **ZIP:** _____

CONTACT PERSON: _____ **CONTACT PHONE NUMBER: (_____)** _____

EMAIL ADDRESS: _____

INSPECTION DOCUMENTATION

DATE (mo/day/yr)	TIME (hr:min AM/PM)	ANY DEFICIENCIES? (CHECK IF YES)	INSPECTOR(S)
		<input type="checkbox"/>	
		<input type="checkbox"/>	
		<input type="checkbox"/>	
		<input type="checkbox"/>	
		<input type="checkbox"/>	
		<input type="checkbox"/>	

Deficiencies Noted During any Inspection (give date(s); attach additional sheets if necessary): _____

Corrective Action Taken or Planned (give date(s); attach additional sheets if necessary): _____

Based upon this inspection, which I or personnel under my direct supervision conducted, I certify that all erosion and sediment controls have been implemented and maintained, except for those deficiencies noted above, in accordance with the Storm Water Pollution Prevention Plan (SWPPP) and sound engineering practices as required by the above referenced permit. I further certify that the LCNOI and SWPPP information is up to date.

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fines and imprisonment for knowing violations.

Authorized Signature

Date

Printed Name

Title

Request for Termination (RFT) of Coverage



LARGE CONSTRUCTION GENERAL PERMIT
Coverage No. MSR10 ___ ___ ___ **County** _____
(Fill in your Certificate of Coverage Number and County)

This form must be submitted within thirty (30) days of achieving final stabilization (see ACT10, S-1 of general permit). Failure to submit this form is a violation of permit conditions.

The signatory of this form must be the owner or operator (prime contractor) who is the current coverage recipient (rather than the project manager or environmental consultant).

(Please Print or Type)

Project Name: _____

Physical Site Street Address (if not available, indicate nearest named road): _____

City: _____ **County:** _____ **Zip:** _____

Coverage Recipient Company Name: _____

Street Address / P.O. Box: _____

City: _____ **State:** _____ **Zip:** _____

Coverage Recipient Contact Name and Position: _____ **Tel. #:** (____) _____

Has another owner(s) or operator(s) assumed control over all areas of the site that have not reached final stabilization?

RESIDENTIAL SUBDIVISIONS:

- YES. A copy of the Registration Form for Residential Lot Coverage for each lot or out parcel that has been sold and a site map, indicating which lots have been sold, are attached.**
- NO. Coverage may not be terminated until all areas have reached final stabilization.**

COMMERCIAL DEVELOPMENT:

- YES. A copy of the site map, indicating which out-parcels have been sold, is attached.**
- NO. Coverage may not be terminated until all areas have reached final stabilization.**

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fines and imprisonment for knowing violations. I understand that by submitting this Request for Termination and receiving written confirmation, I will no longer be authorized to discharge storm water associated with construction activity under this general permit. Discharging pollutants associated with construction activity to waters of the State without proper permit coverage is a violation of state law. I also understand that the submittal of this Request for Termination does not release an owner or operator from liability for any violations of this permit or the Clean Water Act.

Authorized Name (Print) Telephone Signature Date Signed

¹This application shall be signed according to the General Permit, ACT11, T-7 as follows:

- For a corporation, by a responsible corporate officer.
- For a partnership, by a general partner.
- For a sole proprietorship, by the proprietor.
- For a municipal, state or other public facility, by principal executive officer, mayor, or ranking elected official.

After signing please mail to: Chief, Environmental Permits Division
MS Department of Environmental Quality, Office of Pollution Control
P.O. Box 2261
Jackson, Mississippi 39225